


ECOHiLUX照明器具 配光データシート

意匠図


器具品名	ダウンライト	保守率	
		良	0.78
器具品番	DL8L30-15MUB-D	中	
		否	0.74
部品品名	-	否	
		0.70	
部品品番	-	器具効率	
		上方向	0%
器具光束	1080lm	下方向	100%
		全方向	100%
光源	-		
光源光束	一体型器具のため、器具光束表示		

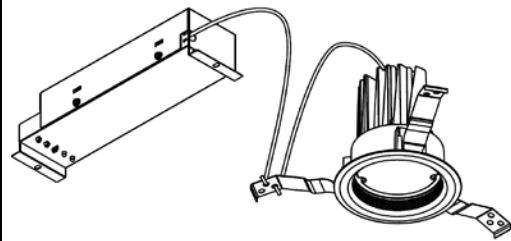

照明率表

反射率	天井	作業面照度率(×0.01)														0		
		壁		80		70		50		30		30		10				
		床	70	50	30	10	70	50	30	10	30	10	30	10	30	0		
室 指 数	0.4	59	55	48	47	43	42	39	58	55	48	46	42	42	41	38	37	
	0.6	76	70	66	63	60	58	54	75	69	65	62	59	58	54	64	57	54
	0.8	86	78	76	71	69	66	63	84	77	75	71	69	66	63	73	70	66
	1	92	83	83	77	76	72	69	90	82	81	76	75	72	69	79	75	74
	1.25	98	87	89	82	82	77	74	96	86	87	81	81	77	74	85	80	76
	1.5	102	90	93	85	87	81	78	99	88	91	84	86	80	77	88	82	83
	2	107	93	99	89	93	85	83	104	92	97	88	92	85	82	93	86	89
	2.5	110	95	104	91	98	89	86	107	94	101	91	96	88	86	96	89	87
	3	112	96	107	93	102	91	89	109	95	104	92	100	90	88	99	91	95
	4	115	98	111	96	107	94	92	112	97	108	95	104	93	92	102	93	99
	5	117	99	114	98	110	96	95	113	98	110	97	107	95	94	104	95	102
	7	120	101	117	99	115	98	97	115	99	113	98	111	97	97	106	97	105
	10	121	101	120	101	118	100	100	117	100	116	100	114	99	99	108	98	107

配光曲線

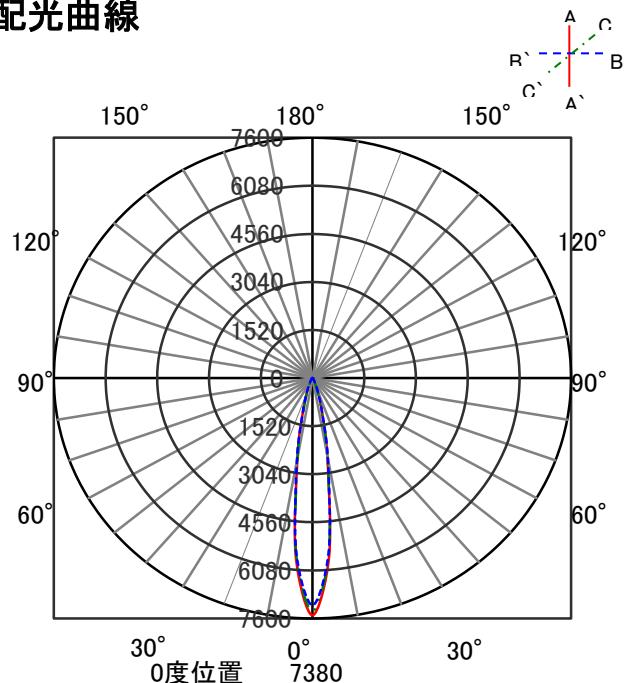

直射水平面照度

