


ECOHiLUX照明器具 配光データシート

意匠図


器具品名	ダウンライト	保守率	
器具品番	DL32N-25MUW-D	良	0.78
部品品名	-	中	0.74
部品品番	-	否	0.70
		器具効率	
器具光束	4300lm	上方向	0%
光源	-	下方向	100%
光源光束	一体型器具のため、器具光束表示	全方向	100%

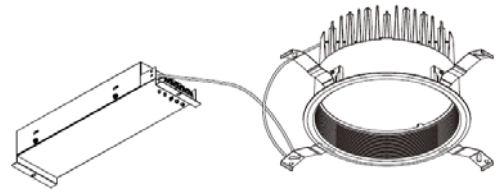

照明率表

反射率	天井 壁 床	80								70				50				30				0			
		70	10	30	10	30	10	30	10	70	10	30	10	50	10	30	10	30	10	30	10	30	10	30	10
室 指 数	0.4	61	58	50	48	43	42	39	60	57	49	48	43	42	39	48	47	43	42	39	42	42	39	37	
	0.6	80	74	68	65	61	59	55	78	73	67	64	61	59	55	66	63	60	59	55	59	58	55	53	
	0.8	91	82	79	74	72	69	65	89	81	78	74	71	69	65	76	73	70	68	64	69	67	64	63	
	1	98	88	87	80	79	75	71	95	86	80	78	75	71	83	78	77	74	71	75	73	70	69	69	
	1.25	104	92	94	86	87	81	77	101	91	92	85	85	81	77	89	84	83	80	77	81	79	76	74	
	1.5	108	95	99	90	92	85	82	105	94	97	89	90	85	81	93	87	88	84	81	85	83	80	78	
	2	114	99	106	94	99	90	87	110	98	103	93	97	90	87	99	92	94	89	86	91	87	85	83	
	2.5	118	101	110	97	104	94	91	114	100	108	97	102	93	91	102	95	98	92	90	95	91	89	87	
	3	120	103	114	100	108	97	94	116	102	111	99	106	96	94	105	97	101	94	92	97	93	91	89	
	4	124	105	118	103	114	100	98	119	104	115	101	111	99	97	109	99	106	98	96	101	96	95	92	
5	126	106	122	104	118	102	101	121	105	118	103	115	102	100	111	101	109	100	98	103	98	97	94		
7	128	108	125	106	122	105	104	124	107	121	105	119	104	103	114	103	112	102	101	106	100	100	97		
10	130	109	128	108	126	107	106	126	108	124	107	122	106	105	116	105	115	104	104	108	102	102	99		

配光曲線

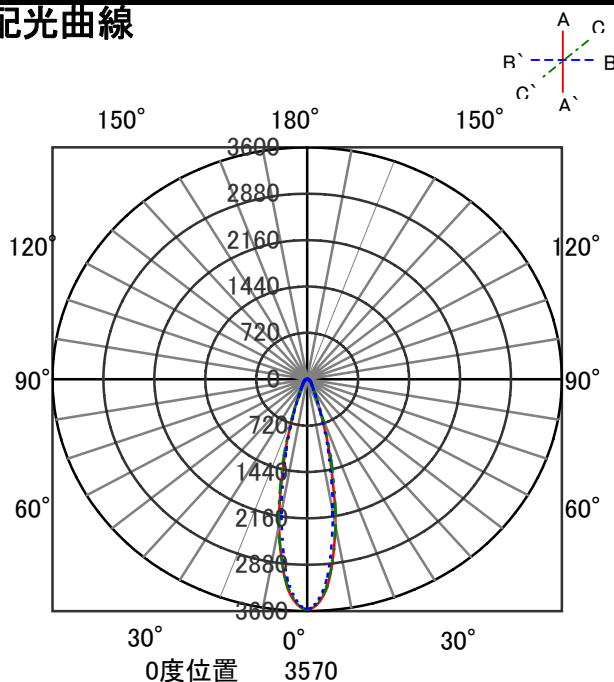

直射水平面照度

