


ECOHiLUX照明器具 配光データシート

器具品名	ユニバーサルダウンライト	保守率	
		良	0.78
器具品番	UV8W-25MUB-D	中	0.74
		否	0.70
部品品名	-	器具効率	
部品品番	-	上方向	0%
		下方向	100%
光源	-	全方向	100%
光源光束	一体型器具のため、器具光束表示		


意匠圖

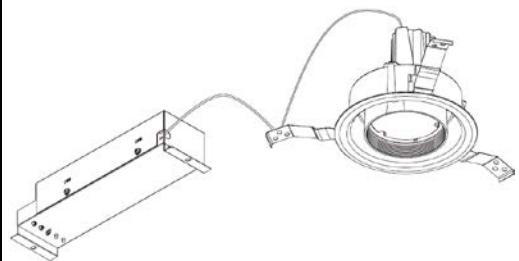

照明率表

		作業面照明率(×0.01)																		
反射率	天井	80						70						50						30
	壁	70	50	30	10	70	50	30	10	50	30	10	30	10	30	10	30	10	0	
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	
室指 数	0.4	58	54	47	46	42	41	37	57	54	47	46	41	41	37	46	45	41	40	37
	0.6	75	69	65	62	58	57	53	74	69	64	61	58	56	53	63	60	57	56	53
	0.8	85	77	75	70	68	65	62	83	76	74	70	68	65	62	72	69	67	65	61
	1	91	82	82	76	75	71	68	89	81	80	75	74	71	67	78	74	73	70	67
	1.25	97	86	88	81	81	76	73	95	85	86	80	80	76	73	84	79	79	75	72
	1.5	101	89	92	84	86	80	77	98	88	91	83	85	79	76	87	82	82	78	76
	2	106	92	99	88	93	85	82	103	91	96	87	91	84	81	92	86	88	83	81
	2.5	109	94	103	91	98	88	85	106	93	100	90	96	87	85	96	88	92	86	84
	3	112	96	106	93	101	90	88	108	95	103	92	99	89	87	98	90	95	88	86
	4	115	98	110	95	106	93	92	111	97	107	94	104	93	91	101	93	99	91	90
7	5	117	99	113	97	110	95	94	113	98	110	96	107	95	93	103	94	101	93	92
	7	119	100	116	99	114	98	97	115	99	113	98	111	97	96	106	96	104	95	94
	10	121	101	119	100	117	100	99	117	100	115	99	114	99	98	108	97	107	97	96

配光曲線

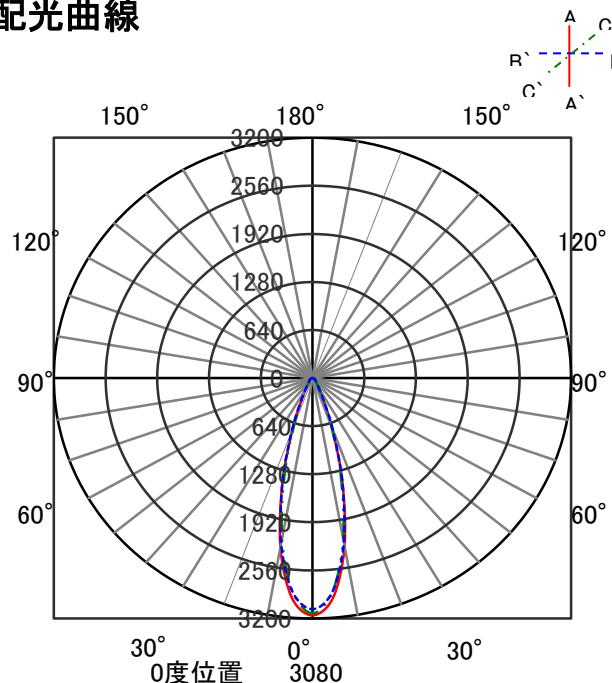

直射水平面照度

