


ECOHiLUX照明器具 配光データシート

意匠図


器具品名	ユニバーサルダウンライト	保守率	
器具品番	UV24N-50MUB-D	良	0.78
部品品名	-	中	0.74
部品品番	-	否	0.70
		器具効率	
器具光束	2970lm	上方向	0%
光源	-	下方向	100%
光源光束	一体型器具のため、器具光束表示	全方向	100%

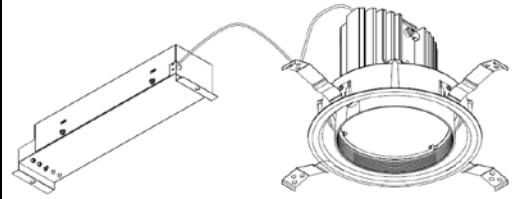

照明率表

反射率	天井 壁 床	80																70				50				30				0																																																																																																																																																																																																																																						
		70				50				30				10				70				50				30				10																																																																																																																																																																																																																																						
		30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10																																																																																																																																																																																																																																			
室 指 数	0.4	56	53	45	43	39	38	34	55	52	45	43	39	38	34	44	43	38	38	34	38	37	34	33	72	67	62	59	55	53	50	60	58	54	53	49	54	53	49	48	83	76	72	68	65	63	59	70	67	64	62	59	63	62	58	57	89	81	79	74	72	69	65	77	73	71	68	65	70	68	65	63	95	86	86	80	80	75	72	83	78	78	74	71	76	73	71	69	99	89	91	83	84	79	76	87	82	82	78	75	80	77	74	73	105	93	97	88	92	84	81	93	86	88	83	81	85	82	80	78	108	96	102	91	97	88	85	97	90	93	87	84	89	86	83	81	109	97	105	93	100	91	88	99	92	96	89	87	92	88	86	84	114	100	109	96	105	94	92	103	94	100	92	91	95	91	89	87	117	101	112	97	108	95	93	114	99	109	96	105	94	92	103	94	100	92	91	95	91	89	87	120	101	115	99	112	97	95	115	100	112	98	108	96	95	105	96	103	94	93	98	93	92	89	122	103	119	101	116	100	98	118	101	115	100	113	99	98	108	98	106	97	96	100	95	94	92	124	104	122	103	120	102	101	120	102	118	102	116	101	100	110	100	109	99	98	103	97	96	94

配光曲線

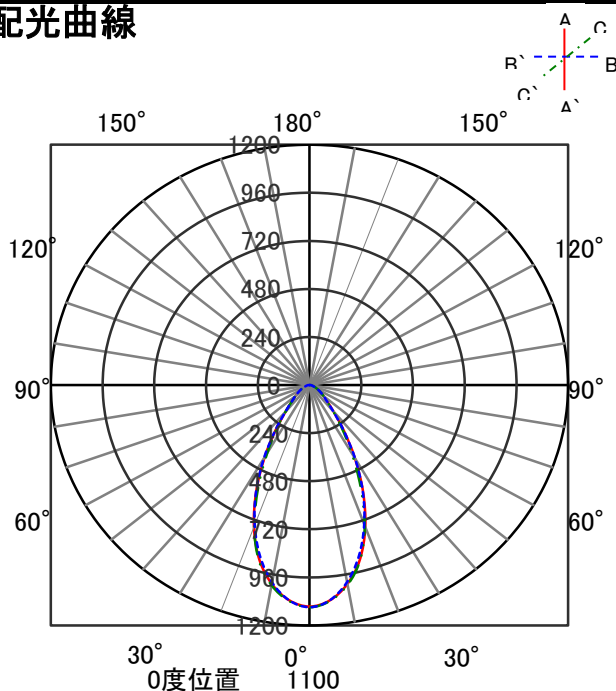

直射水平面照度

