


# ECOHiLUX照明器具 配光データシート

## 意匠図


器具品名	ユニバーサルダウンライト	保守率	
器具品番	UV24L27-25MUB-D	良	0.78
部品品名	-	中	0.74
部品品番	-	否	0.70
器具光束	2610lm	器具効率	
光源	-	上方向	0%
光源光束	一体型器具のため、器具光束表示	下方向	100%
		全方向	100%

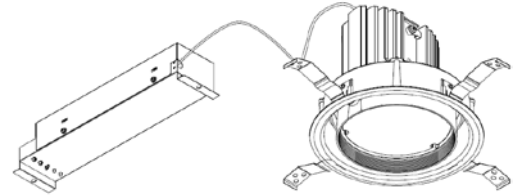

## 照明率表

		作業面照明率(×0.01)																							
反射率	天井	80								70				50				30				0			
	壁	70	10	30	10	30	10	30	10	70	10	30	10	50	10	30	10	30	10	30	10	30	10	30	10
室 指 数	0.4	56	52	45	44	40	39	35	55	52	45	44	39	39	35	44	43	39	38	35	39	38	35	34	
	0.6	73	67	62	59	56	54	51	71	66	62	59	55	54	51	60	58	55	54	50	54	53	50	49	
	0.8	83	75	72	68	66	63	59	81	74	71	67	65	63	59	70	66	64	62	59	63	62	59	57	
	1	89	80	79	73	72	69	65	87	79	78	73	72	68	65	76	72	70	68	65	69	67	64	63	
	1.25	95	84	86	78	79	74	71	92	83	84	78	78	74	71	81	77	76	73	70	74	72	70	68	
	1.5	99	87	90	82	84	78	74	96	86	88	81	82	77	74	85	80	80	76	74	78	75	73	71	
	2	104	90	96	86	90	83	80	101	89	94	85	89	82	79	90	84	86	81	78	83	80	78	76	
	2.5	107	92	101	89	95	86	83	104	91	98	88	93	85	83	93	86	90	84	82	86	83	81	79	
	3	109	94	104	91	99	88	86	106	93	101	90	97	87	85	96	88	92	86	84	89	85	83	81	
	4	112	96	108	93	104	91	89	109	95	105	92	101	91	89	99	91	96	89	88	92	88	86	84	
5	114	97	111	95	107	93	92	111	96	107	94	104	93	91	101	92	99	91	90	94	89	88	86		
7	117	98	114	97	111	96	95	113	97	110	96	108	95	94	104	94	102	93	92	97	91	91	88		
10	118	99	117	98	115	98	97	114	98	113	97	111	97	96	106	95	104	95	94	98	93	93	90		

## 配光曲線

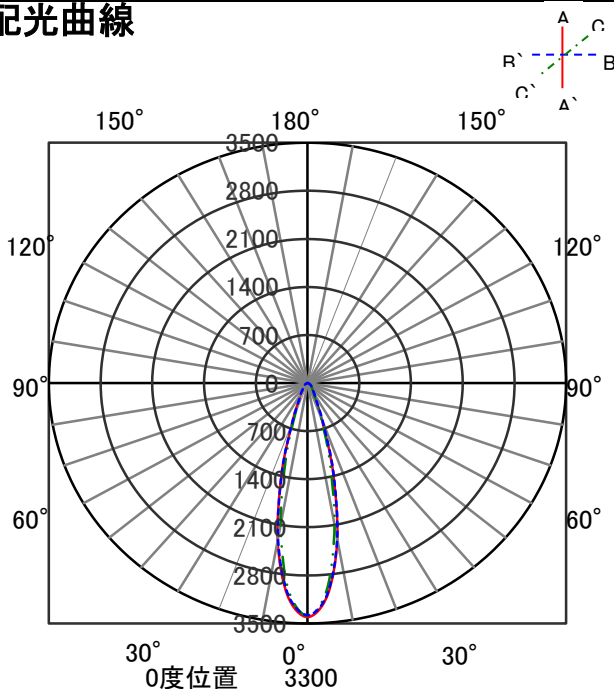

## 直射水平面照度

