


ECOHiLUX照明器具 配光データシート

意匠図

| | | | |
|------|------------------------|------|--------|
| 器具品名 | 直管型LEDランプ 専用器具 トラフ型 | 保守率 | |
| 器具品番 | IRLDL21TR | | 良 0.81 |
| 部品品名 | - | | 中 0.77 |
| 部品品番 | - | | 否 0.67 |
| 器具光束 | | 器具効率 | |
| 光源 | LDG20S-WW/8/10 | 上方向 | 8% |
| 光源光束 | 1000lm | 下方向 | 84% |
| | | 全方向 | 92% |

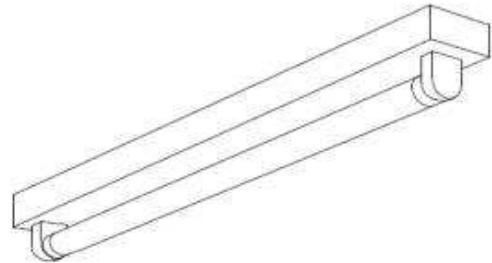


照明率表


作業面照明率(×0.01)

| 反 射 率 | 天井 | 80 | | | | | | 70 | | | | | | 50 | | | | | | 30 | | | 0 | |
|-------------|------|-----|----|-----|----|-----|----|----|-----|----|-----|----|-----|----|----|-----|----|----|----|----|----|----|----|----|
| | 壁 | 70 | | 50 | | 30 | | 10 | | 70 | | 50 | | 30 | | 10 | | 50 | | 30 | | 10 | | 0 |
| | 床 | 30 | 10 | 30 | 10 | 30 | 10 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 10 | 30 | 10 |
| 室 指 数 | 0.4 | 42 | 39 | 29 | 28 | 21 | 21 | 16 | 40 | 38 | 28 | 27 | 21 | 20 | 16 | 26 | 26 | 20 | 20 | 16 | 19 | 19 | 15 | 13 |
| | 0.6 | 57 | 53 | 43 | 41 | 34 | 33 | 28 | 55 | 51 | 42 | 40 | 33 | 33 | 27 | 39 | 38 | 32 | 31 | 27 | 31 | 30 | 26 | 23 |
| | 0.8 | 67 | 61 | 52 | 49 | 42 | 41 | 35 | 64 | 59 | 51 | 48 | 42 | 40 | 34 | 48 | 45 | 40 | 39 | 33 | 38 | 37 | 32 | 29 |
| | 1 | 75 | 68 | 61 | 56 | 51 | 48 | 42 | 72 | 65 | 59 | 55 | 49 | 47 | 41 | 55 | 52 | 47 | 45 | 40 | 45 | 44 | 39 | 36 |
| | 1.25 | 83 | 74 | 69 | 63 | 59 | 56 | 50 | 79 | 71 | 67 | 62 | 58 | 55 | 49 | 63 | 59 | 55 | 53 | 47 | 52 | 51 | 46 | 43 |
| | 1.5 | 88 | 78 | 75 | 68 | 65 | 60 | 54 | 84 | 75 | 72 | 66 | 63 | 59 | 54 | 67 | 63 | 60 | 57 | 52 | 57 | 55 | 50 | 47 |
| | 2 | 96 | 83 | 84 | 75 | 75 | 68 | 62 | 91 | 81 | 81 | 73 | 72 | 67 | 61 | 75 | 70 | 68 | 64 | 60 | 64 | 62 | 58 | 54 |
| | 2.5 | 101 | 87 | 91 | 80 | 82 | 74 | 69 | 96 | 85 | 87 | 78 | 79 | 72 | 68 | 80 | 74 | 74 | 70 | 65 | 70 | 67 | 63 | 59 |
| | 3 | 104 | 90 | 95 | 83 | 87 | 78 | 73 | 100 | 87 | 91 | 81 | 84 | 76 | 72 | 84 | 77 | 78 | 73 | 69 | 73 | 70 | 67 | 62 |
| | 4 | 109 | 93 | 101 | 88 | 94 | 83 | 79 | 104 | 90 | 97 | 86 | 91 | 81 | 77 | 89 | 82 | 84 | 78 | 75 | 79 | 75 | 72 | 67 |
| | 5 | 112 | 95 | 105 | 91 | 99 | 87 | 83 | 107 | 92 | 101 | 88 | 96 | 85 | 81 | 93 | 84 | 88 | 81 | 78 | 82 | 78 | 76 | 71 |
| | 7 | 116 | 97 | 111 | 94 | 106 | 91 | 88 | 110 | 95 | 106 | 92 | 101 | 89 | 86 | 97 | 88 | 93 | 85 | 83 | 86 | 82 | 80 | 75 |
| | 10 | 119 | 99 | 115 | 97 | 111 | 94 | 92 | 113 | 97 | 109 | 95 | 106 | 92 | 90 | 100 | 90 | 98 | 89 | 87 | 90 | 85 | 84 | 78 |

配光曲線

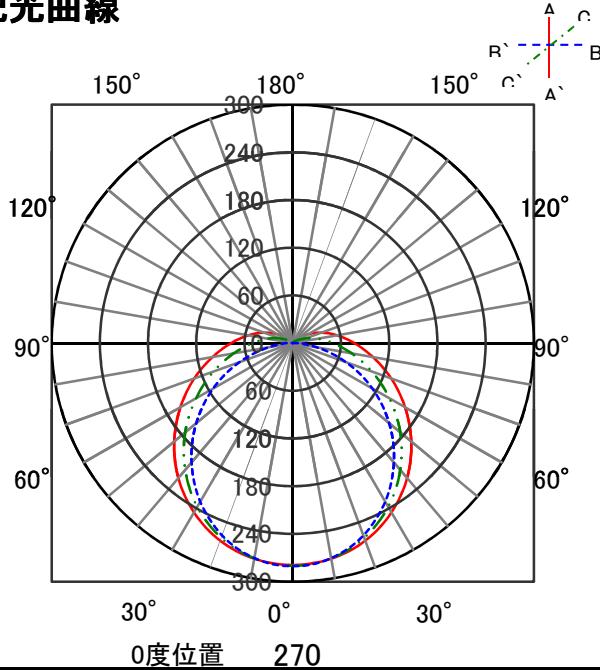


直射水平面照度

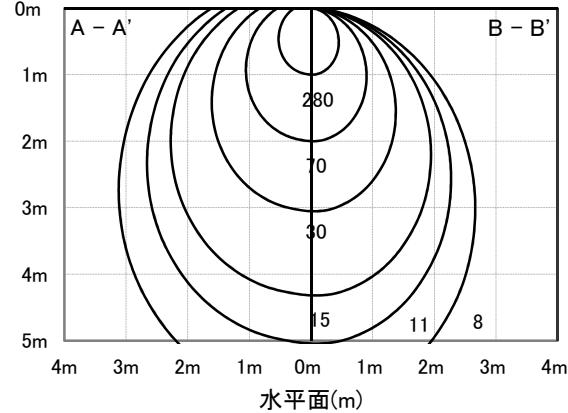

ECOHiLUX照明器具 配光データシート

| | | | |
|------|------------------------|------|---------|
| 器具品名 | 直管型LEDランプ 専用器具 トラフ型 | 保守率 | |
| | | 良 | 0.81 |
| 器具品番 | IRLDL21TR | | 0.77 |
| | 中 | 0.67 | |
| 部品品名 | - | | 0.67 |
| | 器具効率 | | |
| 器具光束 | 920lm | | 上方向 8% |
| | 下方向 | 84% | |
| 光源 | LDG20S-W/7/10 | | 全方向 92% |
| | | | |
| 光源光束 | 1000lm | 全方向 | 92% |

意匠図

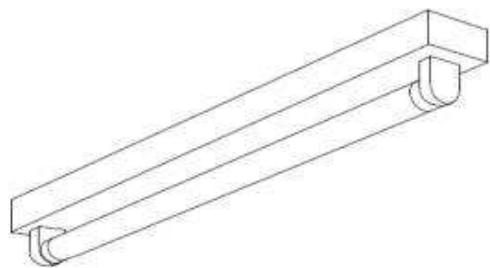


照明率表


作業面照明率(×0.01)

| 反 射 率 | 天井 | 80 | | | | | | 70 | | | | | | 50 | | | | | | 30 | | | 0 | | |
|-------------|------|-----|----|-----|----|-----|----|----|-----|----|-----|----|-----|----|----|-----|----|----|----|----|----|----|----|----|----|
| | 壁 | 70 | | 50 | | 30 | | 10 | | 70 | | 50 | | 30 | | 10 | | 50 | | 30 | | 10 | | 0 | |
| | 床 | 30 | 10 | 30 | 10 | 30 | 10 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 10 | 30 | 10 | 10 |
| 室 指 数 | 0.4 | 42 | 39 | 29 | 28 | 21 | 21 | 16 | 40 | 38 | 28 | 27 | 21 | 20 | 16 | 26 | 26 | 20 | 20 | 16 | 19 | 19 | 15 | 13 | |
| | 0.6 | 57 | 53 | 43 | 41 | 34 | 33 | 28 | 55 | 51 | 42 | 40 | 33 | 33 | 27 | 39 | 38 | 32 | 31 | 27 | 31 | 30 | 26 | 23 | |
| | 0.8 | 67 | 61 | 52 | 49 | 42 | 41 | 35 | 64 | 59 | 51 | 48 | 42 | 40 | 34 | 48 | 45 | 40 | 39 | 33 | 38 | 37 | 32 | 29 | |
| | 1 | 75 | 68 | 61 | 56 | 51 | 48 | 42 | 72 | 65 | 59 | 55 | 49 | 47 | 41 | 55 | 52 | 47 | 45 | 40 | 45 | 44 | 39 | 36 | |
| | 1.25 | 83 | 74 | 69 | 63 | 59 | 56 | 50 | 79 | 71 | 67 | 62 | 58 | 55 | 49 | 63 | 59 | 55 | 53 | 47 | 52 | 51 | 46 | 43 | |
| | 1.5 | 88 | 78 | 75 | 68 | 65 | 60 | 54 | 84 | 75 | 72 | 66 | 63 | 59 | 54 | 67 | 63 | 60 | 57 | 52 | 57 | 55 | 50 | 47 | |
| | 2 | 96 | 83 | 84 | 75 | 75 | 68 | 62 | 91 | 81 | 81 | 73 | 72 | 67 | 61 | 75 | 70 | 68 | 64 | 60 | 64 | 62 | 58 | 54 | |
| | 2.5 | 101 | 87 | 91 | 80 | 82 | 74 | 69 | 96 | 85 | 87 | 78 | 79 | 72 | 68 | 80 | 74 | 74 | 70 | 65 | 70 | 67 | 63 | 59 | |
| | 3 | 104 | 90 | 95 | 83 | 87 | 78 | 73 | 100 | 87 | 91 | 81 | 84 | 76 | 72 | 84 | 77 | 78 | 73 | 69 | 73 | 70 | 67 | 62 | |
| | 4 | 109 | 93 | 101 | 88 | 94 | 83 | 79 | 104 | 90 | 97 | 86 | 91 | 81 | 77 | 89 | 82 | 84 | 78 | 75 | 79 | 75 | 72 | 67 | |
| | 5 | 112 | 95 | 105 | 91 | 99 | 87 | 83 | 107 | 92 | 101 | 88 | 96 | 85 | 81 | 93 | 84 | 88 | 81 | 78 | 82 | 78 | 76 | 71 | |
| | 7 | 116 | 97 | 111 | 94 | 106 | 91 | 88 | 110 | 95 | 106 | 92 | 101 | 89 | 86 | 97 | 88 | 93 | 85 | 83 | 86 | 82 | 80 | 75 | |
| | 10 | 119 | 99 | 115 | 97 | 111 | 94 | 92 | 113 | 97 | 109 | 95 | 106 | 92 | 90 | 100 | 90 | 98 | 89 | 87 | 90 | 85 | 84 | 78 | |

配光曲線

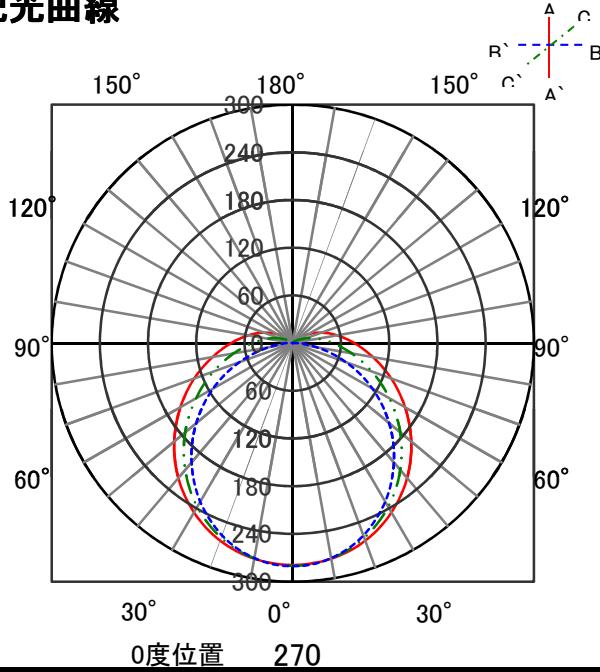


直射水平面照度

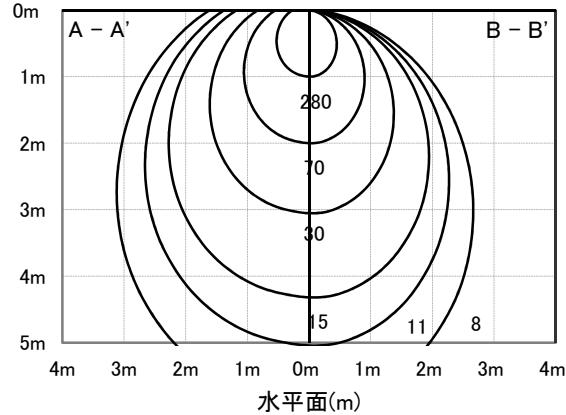

ECOHiLUX照明器具 配光データシート

意匠図

| | | | |
|------|------------------------|------|--------|
| 器具品名 | 直管型LEDランプ 専用器具 トラフ型 | 保守率 | |
| 器具品番 | IRLDL21TR | | 良 0.81 |
| 部品品名 | - | | 中 0.77 |
| 部品品番 | - | | 否 0.67 |
| 器具光束 | | 器具効率 | |
| 光源 | LDG20S-D/7/10 | 上方向 | 8% |
| 光源光束 | 1000lm | 下方向 | 84% |
| | | 全方向 | 92% |

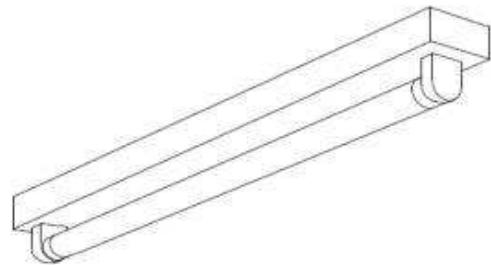


照明率表


作業面照明率(×0.01)

| 反 射 率 | 天井 | 80 | | | | | | 70 | | | | | | 50 | | | | | | 30 | | | | | | 0 | |
|-------------|------|-----|----|-----|----|-----|----|----|-----|----|-----|----|-----|----|----|-----|----|----|----|----|----|----|----|----|----|----|----|
| | 壁 | 70 | | 50 | | 30 | | 10 | | 70 | | 50 | | 30 | | 10 | | 50 | | 30 | | 10 | | 30 | | 10 | |
| | 床 | 30 | 10 | 30 | 10 | 30 | 10 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 10 | 30 | 10 | 10 | 30 | 10 |
| 室 指 数 | 0.4 | 42 | 39 | 29 | 28 | 21 | 21 | 16 | 40 | 38 | 28 | 27 | 21 | 20 | 16 | 26 | 26 | 20 | 20 | 16 | 19 | 19 | 15 | 13 | | | |
| | 0.6 | 57 | 53 | 43 | 41 | 34 | 33 | 28 | 55 | 51 | 42 | 40 | 33 | 33 | 27 | 39 | 38 | 32 | 31 | 27 | 31 | 30 | 26 | 23 | | | |
| | 0.8 | 67 | 61 | 52 | 49 | 42 | 41 | 35 | 64 | 59 | 51 | 48 | 42 | 40 | 34 | 48 | 45 | 40 | 39 | 33 | 38 | 37 | 32 | 29 | | | |
| | 1 | 75 | 68 | 61 | 56 | 51 | 48 | 42 | 72 | 65 | 59 | 55 | 49 | 47 | 41 | 55 | 52 | 47 | 45 | 40 | 45 | 44 | 39 | 36 | | | |
| | 1.25 | 83 | 74 | 69 | 63 | 59 | 56 | 50 | 79 | 71 | 67 | 62 | 58 | 55 | 49 | 63 | 59 | 55 | 53 | 47 | 52 | 51 | 46 | 43 | | | |
| | 1.5 | 88 | 78 | 75 | 68 | 65 | 60 | 54 | 84 | 75 | 72 | 66 | 63 | 59 | 54 | 67 | 63 | 60 | 57 | 52 | 57 | 55 | 50 | 47 | | | |
| | 2 | 96 | 83 | 84 | 75 | 75 | 68 | 62 | 91 | 81 | 81 | 73 | 72 | 67 | 61 | 75 | 70 | 68 | 64 | 60 | 64 | 62 | 58 | 54 | | | |
| | 2.5 | 101 | 87 | 91 | 80 | 82 | 74 | 69 | 96 | 85 | 87 | 78 | 79 | 72 | 68 | 80 | 74 | 74 | 70 | 65 | 70 | 67 | 63 | 59 | | | |
| | 3 | 104 | 90 | 95 | 83 | 87 | 78 | 73 | 100 | 87 | 91 | 81 | 84 | 76 | 72 | 84 | 77 | 78 | 73 | 69 | 73 | 70 | 67 | 62 | | | |
| | 4 | 109 | 93 | 101 | 88 | 94 | 83 | 79 | 104 | 90 | 97 | 86 | 91 | 81 | 77 | 89 | 82 | 84 | 78 | 75 | 79 | 75 | 72 | 67 | | | |
| | 5 | 112 | 95 | 105 | 91 | 99 | 87 | 83 | 107 | 92 | 101 | 88 | 96 | 85 | 81 | 93 | 84 | 88 | 81 | 78 | 82 | 78 | 76 | 71 | | | |
| | 7 | 116 | 97 | 111 | 94 | 106 | 91 | 88 | 110 | 95 | 106 | 92 | 101 | 89 | 86 | 97 | 88 | 93 | 85 | 83 | 86 | 82 | 80 | 75 | | | |
| | 10 | 119 | 99 | 115 | 97 | 111 | 94 | 92 | 113 | 97 | 109 | 95 | 106 | 92 | 90 | 100 | 90 | 98 | 89 | 87 | 90 | 85 | 84 | 78 | | | |

配光曲線

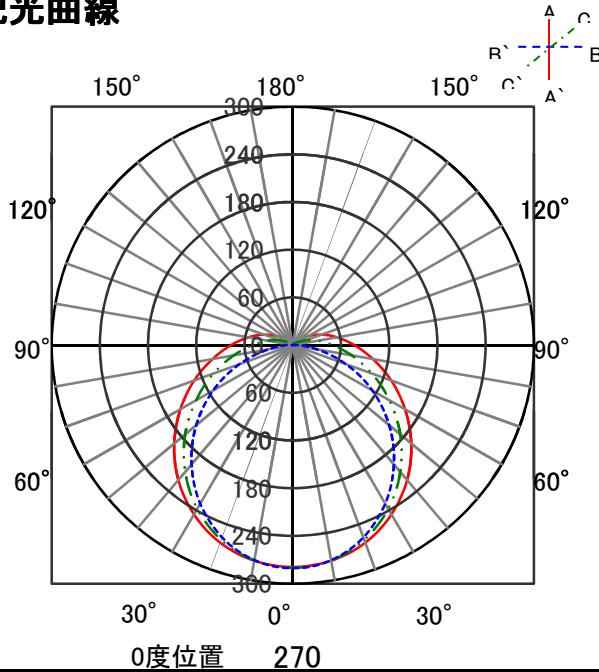


直射水平面照度

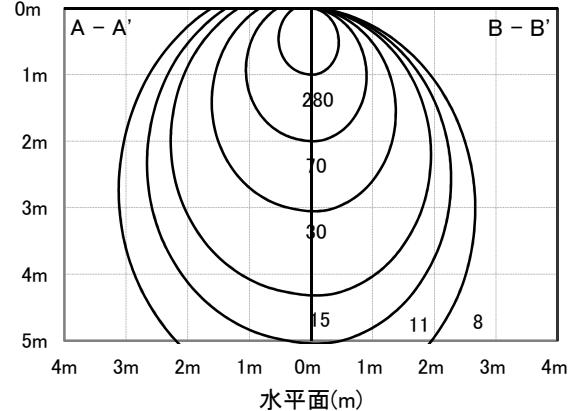

ECOHiLUX照明器具 配光データシート

| 器具品名 | 直管型LEDランプ 専用器具 トラフ型 | 保守率 | |
|------|------------------------|-----|---------|
| | | 良 | 0.81 |
| 器具品番 | IRLDFL21TR | | 0.77 |
| | - | | 0.67 |
| 部品品名 | - | | 器具効率 |
| | - | | |
| 器具光束 | 920lm | | 上方向 8% |
| | 光源 LDGR20S-WW/9/10 | | 下方向 84% |
| 光源光束 | 1000lm | | 全方向 92% |


意匠図

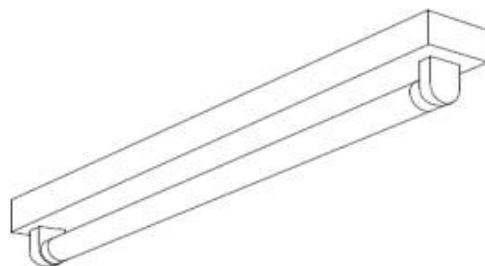


照明率表

| 反 射 率 | 天井 | 作業面照明率(×0.01) | | | | | | | | | | | | 0 | |
|-------------|------|---------------|----|-----|----|-----|----|----|-----|----|-----|----|-----|----|--|
| | | 80 | | | 70 | | | 50 | | | 30 | | | | |
| | | 壁 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 50 | 30 | 10 | | |
| 室 指 数 | 床 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 0 | |
| | 0.4 | 42 | 39 | 29 | 28 | 21 | 21 | 16 | 40 | 38 | 28 | 27 | 21 | 20 | |
| | 0.6 | 57 | 53 | 43 | 41 | 34 | 33 | 28 | 55 | 51 | 42 | 40 | 33 | 27 | |
| | 0.8 | 67 | 61 | 52 | 49 | 42 | 41 | 35 | 64 | 59 | 51 | 48 | 42 | 40 | |
| | 1 | 75 | 68 | 61 | 56 | 51 | 48 | 42 | 72 | 65 | 59 | 55 | 49 | 47 | |
| | 1.25 | 83 | 74 | 69 | 63 | 59 | 56 | 50 | 79 | 71 | 67 | 62 | 58 | 55 | |
| | 1.5 | 88 | 78 | 75 | 68 | 65 | 60 | 54 | 84 | 75 | 72 | 66 | 63 | 59 | |
| | 2 | 96 | 83 | 84 | 75 | 75 | 68 | 62 | 91 | 81 | 81 | 73 | 72 | 67 | |
| | 2.5 | 101 | 87 | 91 | 80 | 82 | 74 | 69 | 96 | 85 | 87 | 78 | 79 | 72 | |
| | 3 | 104 | 90 | 95 | 83 | 87 | 78 | 73 | 100 | 87 | 91 | 81 | 84 | 77 | |
| 指 数 | 4 | 109 | 93 | 101 | 88 | 94 | 83 | 79 | 104 | 90 | 97 | 86 | 91 | 81 | |
| | 5 | 112 | 95 | 105 | 91 | 99 | 87 | 83 | 107 | 92 | 101 | 88 | 96 | 85 | |
| | 7 | 116 | 97 | 111 | 94 | 106 | 91 | 88 | 110 | 95 | 106 | 92 | 101 | 89 | |
| | 10 | 119 | 99 | 115 | 97 | 111 | 94 | 92 | 113 | 97 | 109 | 95 | 106 | 92 | |

配光曲線

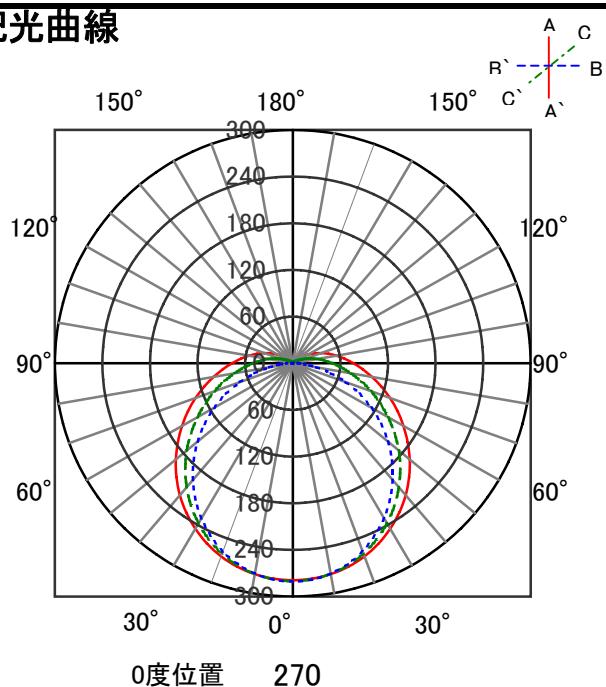


直射水平面照度

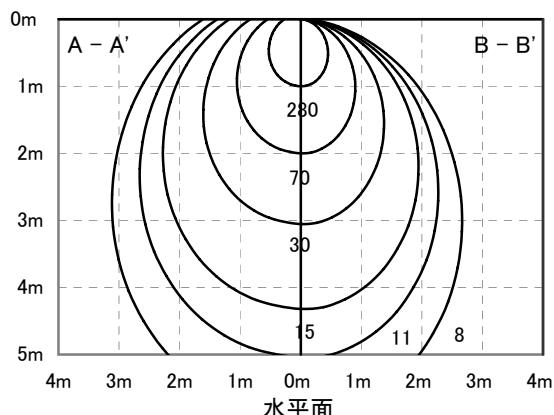

ECOHiLUX照明器具 配光データシート

| | | | |
|------|------------------------|------|------|
| 器具品名 | 直管型LEDランプ 専用器具 トラフ型 | 保守率 | |
| 器具品番 | IRLDFL21TR | 良 | 0.81 |
| 部品品名 | - | 中 | 0.77 |
| 部品品番 | - | 否 | 0.67 |
| 器具効率 | | 器具効率 | |
| 器具光束 | 920lm | 上方向 | 8% |
| 光源 | LDGR20S-W/8/10 | 下方向 | 84% |
| 光源光束 | 1000lm | 全方向 | 92% |


意匠図

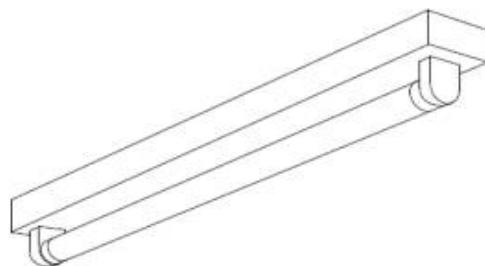


照明率表

| 作業面照明率(×0.01) | | | | | | | | | | | | | | | | 0 | | | | | | | | |
|---------------|------|-----|----|-----|----|-----|----|----|-----|----|-----|----|-----|----|----|-----|----|----|----|----|----|----|----|----|
| 反 射 率 | 天井 | 80 | | | | 70 | | | | 50 | | | | 30 | | | | | | | | | | |
| | 壁 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 0 | | | | | | | |
| | 床 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | | | | | | | |
| 室 指 数 | 0.4 | 42 | 39 | 29 | 28 | 21 | 21 | 16 | 40 | 38 | 28 | 27 | 21 | 20 | 16 | 26 | 20 | 16 | 19 | 19 | 15 | 13 | | |
| | 0.6 | 57 | 53 | 43 | 41 | 34 | 33 | 28 | 55 | 51 | 42 | 40 | 33 | 33 | 27 | 39 | 38 | 32 | 31 | 27 | 31 | 30 | 26 | 23 |
| | 0.8 | 67 | 61 | 52 | 49 | 42 | 41 | 35 | 64 | 59 | 51 | 48 | 42 | 40 | 34 | 48 | 45 | 40 | 39 | 33 | 38 | 37 | 32 | 29 |
| | 1 | 75 | 68 | 61 | 56 | 51 | 48 | 42 | 72 | 65 | 59 | 55 | 49 | 47 | 41 | 55 | 52 | 47 | 45 | 40 | 45 | 44 | 39 | 36 |
| | 1.25 | 83 | 74 | 69 | 63 | 59 | 56 | 50 | 79 | 71 | 67 | 62 | 58 | 55 | 49 | 63 | 59 | 55 | 53 | 47 | 52 | 51 | 46 | 43 |
| | 1.5 | 88 | 78 | 75 | 68 | 65 | 60 | 54 | 84 | 75 | 72 | 66 | 63 | 59 | 54 | 67 | 63 | 60 | 57 | 52 | 57 | 55 | 50 | 47 |
| | 2 | 96 | 83 | 84 | 75 | 75 | 68 | 62 | 91 | 81 | 81 | 73 | 72 | 67 | 61 | 75 | 70 | 68 | 64 | 60 | 64 | 62 | 58 | 54 |
| | 2.5 | 101 | 87 | 91 | 80 | 82 | 74 | 69 | 96 | 85 | 87 | 78 | 79 | 72 | 68 | 80 | 74 | 74 | 70 | 65 | 70 | 67 | 63 | 59 |
| | 3 | 104 | 90 | 95 | 83 | 87 | 78 | 73 | 100 | 87 | 91 | 81 | 84 | 76 | 72 | 84 | 77 | 78 | 73 | 69 | 73 | 70 | 67 | 62 |
| | 4 | 109 | 93 | 101 | 88 | 94 | 83 | 79 | 104 | 90 | 97 | 86 | 91 | 81 | 77 | 89 | 82 | 84 | 78 | 75 | 79 | 75 | 72 | 67 |
| | 5 | 112 | 95 | 105 | 91 | 99 | 87 | 83 | 107 | 92 | 101 | 88 | 96 | 85 | 81 | 93 | 84 | 88 | 81 | 78 | 82 | 78 | 76 | 71 |
| | 7 | 116 | 97 | 111 | 94 | 106 | 91 | 88 | 110 | 95 | 106 | 92 | 101 | 89 | 86 | 97 | 88 | 93 | 85 | 83 | 86 | 82 | 80 | 75 |
| | 10 | 119 | 99 | 115 | 97 | 111 | 94 | 92 | 113 | 97 | 109 | 95 | 106 | 92 | 90 | 100 | 90 | 98 | 89 | 87 | 90 | 85 | 84 | 78 |

配光曲線

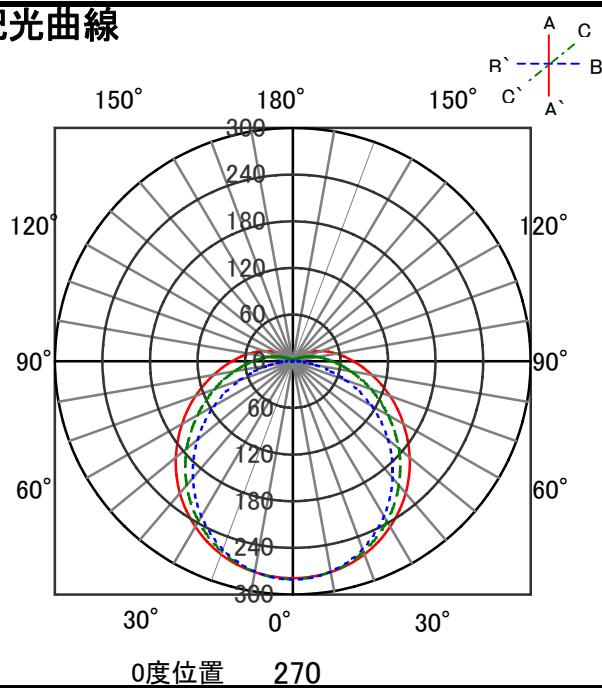


直射水平面照度

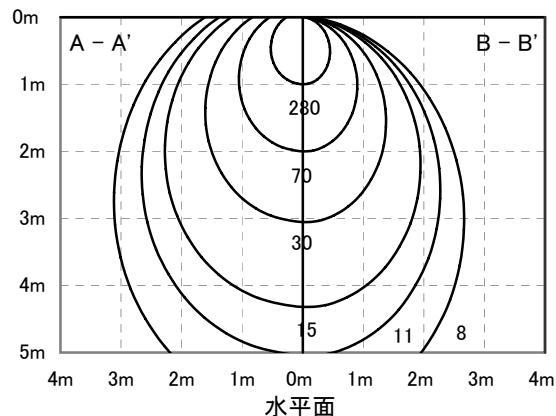

ECOHiLUX照明器具 配光データシート

| | | | |
|------|------------------------|------|------|
| 器具品名 | 直管型LEDランプ 専用器具 トラフ型 | 保守率 | |
| | | 良 | 0.81 |
| 器具品番 | IRLDFL21TR | | 0.77 |
| | 否 | 0.67 | |
| 部品品名 | - | | 器具効率 |
| | | | |
| 器具光束 | 920lm | 上方向 | 8% |
| 光源 | LDGR20S-N/8/10 | 下方向 | 84% |
| 光源光束 | 1000lm | 全方向 | 92% |


意匠図

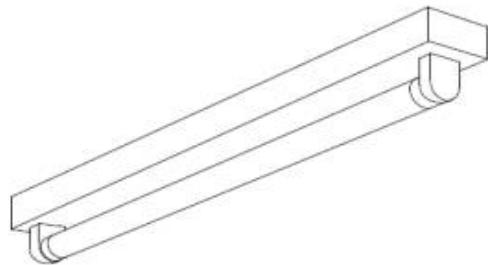


照明率表

| 作業面照明率(×0.01) | | | | | | | | | | | | | | | | 0 | | | | | | | | |
|---------------|------|-----|----|-----|----|-----|----|----|-----|----|-----|----|-----|----|----|-----|----|----|----|----|----|----|----|----|
| 反 射 率 | 天井 | 80 | | | | 70 | | | | 50 | | | | 30 | | | | | | | | | | |
| | 壁 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 50 | 30 | 10 | 30 | 10 | 10 | 30 | | | | | | | | |
| | 床 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 10 | | | | | | | | |
| 室 指 数 | 0.4 | 42 | 39 | 29 | 28 | 21 | 21 | 16 | 40 | 38 | 28 | 27 | 21 | 20 | 16 | 26 | 20 | 20 | 16 | 19 | 19 | 15 | 13 | |
| | 0.6 | 57 | 53 | 43 | 41 | 34 | 33 | 28 | 55 | 51 | 42 | 40 | 33 | 33 | 27 | 39 | 38 | 32 | 31 | 27 | 31 | 30 | 26 | 23 |
| | 0.8 | 67 | 61 | 52 | 49 | 42 | 41 | 35 | 64 | 59 | 51 | 48 | 42 | 40 | 34 | 48 | 45 | 40 | 39 | 33 | 38 | 37 | 32 | 29 |
| | 1 | 75 | 68 | 61 | 56 | 51 | 48 | 42 | 72 | 65 | 59 | 55 | 49 | 47 | 41 | 55 | 52 | 47 | 45 | 40 | 45 | 44 | 39 | 36 |
| | 1.25 | 83 | 74 | 69 | 63 | 59 | 56 | 50 | 79 | 71 | 67 | 62 | 58 | 55 | 49 | 63 | 59 | 55 | 53 | 47 | 52 | 51 | 46 | 43 |
| | 1.5 | 88 | 78 | 75 | 68 | 65 | 60 | 54 | 84 | 75 | 72 | 66 | 63 | 59 | 54 | 67 | 63 | 60 | 57 | 52 | 57 | 55 | 50 | 47 |
| | 2 | 96 | 83 | 84 | 75 | 75 | 68 | 62 | 91 | 81 | 81 | 73 | 72 | 67 | 61 | 75 | 70 | 68 | 64 | 60 | 64 | 62 | 58 | 54 |
| | 2.5 | 101 | 87 | 91 | 80 | 82 | 74 | 69 | 96 | 85 | 87 | 78 | 79 | 72 | 68 | 80 | 74 | 74 | 70 | 65 | 70 | 67 | 63 | 59 |
| | 3 | 104 | 90 | 95 | 83 | 87 | 78 | 73 | 100 | 87 | 91 | 81 | 84 | 76 | 72 | 84 | 77 | 78 | 73 | 69 | 73 | 70 | 67 | 62 |
| | 4 | 109 | 93 | 101 | 88 | 94 | 83 | 79 | 104 | 90 | 97 | 86 | 91 | 81 | 77 | 89 | 82 | 84 | 78 | 75 | 79 | 75 | 72 | 67 |
| | 5 | 112 | 95 | 105 | 91 | 99 | 87 | 83 | 107 | 92 | 101 | 88 | 96 | 85 | 81 | 93 | 84 | 88 | 81 | 78 | 82 | 78 | 76 | 71 |
| | 7 | 116 | 97 | 111 | 94 | 106 | 91 | 88 | 110 | 95 | 106 | 92 | 101 | 89 | 86 | 97 | 88 | 93 | 85 | 83 | 86 | 82 | 80 | 75 |
| | 10 | 119 | 99 | 115 | 97 | 111 | 94 | 92 | 113 | 97 | 109 | 95 | 106 | 92 | 90 | 100 | 90 | 98 | 89 | 87 | 90 | 85 | 84 | 78 |

配光曲線

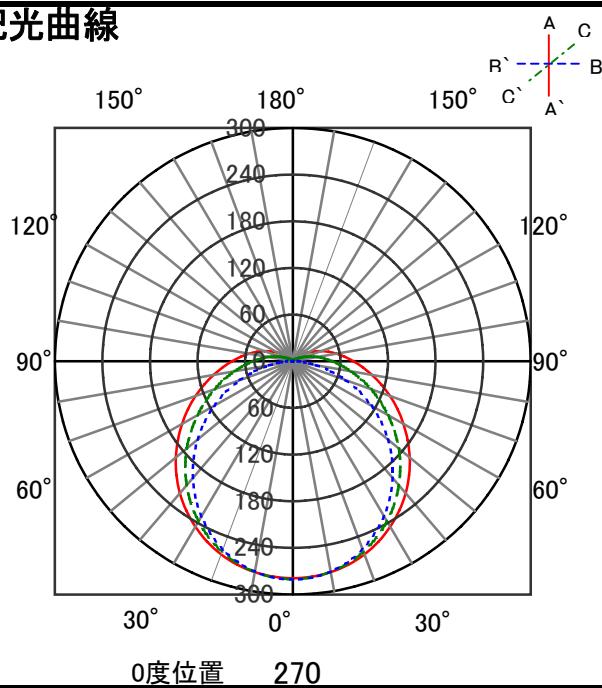


直射水平面照度

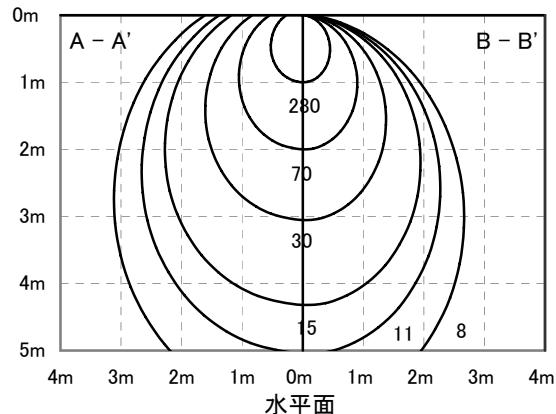

ECOHiLUX照明器具 配光データシート

| | | | |
|------|------------------------|------|--------|
| 器具品名 | 直管型LEDランプ 専用器具 トラフ型 | 保守率 | |
| 器具品番 | IRLDFL21TR | | 良 0.81 |
| 部品品名 | - | | 中 0.77 |
| 部品品番 | - | | 否 0.67 |
| 器具効率 | | 器具効率 | |
| 器具光束 | 920lm | 上方向 | 8% |
| 光源 | LDGR20S-D/8/10 | 下方向 | 84% |
| 光源光束 | 1000lm | 全方向 | 92% |


意匠図

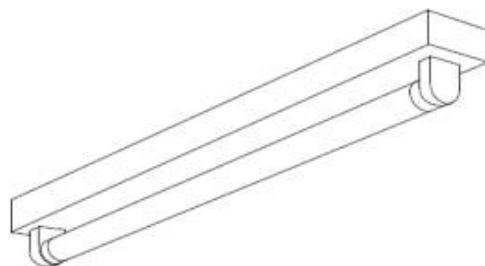


照明率表

| 作業面照明率(×0.01) | | | | | | | | | | | | | | | | | 30 | | 0 | | | | | |
|---------------|------|-----|----|-----|----|-----|----|----|-----|----|-----|----|-----|----|----|-----|----|----|----|----|----|----|----|----|
| 反 射 率 | 天井 | 80 | | | | | | 70 | | | | | | 50 | | | | | | 0 | | | | |
| | 壁 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 30 | 0 | | | | | |
| | 床 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | | | | | |
| 室 指 数 | 0.4 | 42 | 39 | 29 | 28 | 21 | 21 | 16 | 40 | 38 | 28 | 27 | 21 | 20 | 16 | 26 | 20 | 20 | 16 | 19 | 19 | 15 | 13 | |
| | 0.6 | 57 | 53 | 43 | 41 | 34 | 33 | 28 | 55 | 51 | 42 | 40 | 33 | 33 | 27 | 39 | 38 | 32 | 31 | 27 | 31 | 30 | 26 | 23 |
| | 0.8 | 67 | 61 | 52 | 49 | 42 | 41 | 35 | 64 | 59 | 51 | 48 | 42 | 40 | 34 | 48 | 45 | 40 | 39 | 33 | 38 | 37 | 32 | 29 |
| | 1 | 75 | 68 | 61 | 56 | 51 | 48 | 42 | 72 | 65 | 59 | 55 | 49 | 47 | 41 | 55 | 52 | 47 | 45 | 40 | 45 | 44 | 39 | 36 |
| | 1.25 | 83 | 74 | 69 | 63 | 59 | 56 | 50 | 79 | 71 | 67 | 62 | 58 | 55 | 49 | 63 | 59 | 55 | 53 | 47 | 52 | 51 | 46 | 43 |
| | 1.5 | 88 | 78 | 75 | 68 | 65 | 60 | 54 | 84 | 75 | 72 | 66 | 63 | 59 | 54 | 67 | 63 | 60 | 57 | 52 | 57 | 55 | 50 | 47 |
| | 2 | 96 | 83 | 84 | 75 | 75 | 68 | 62 | 91 | 81 | 81 | 73 | 72 | 67 | 61 | 75 | 70 | 68 | 64 | 60 | 64 | 62 | 58 | 54 |
| | 2.5 | 101 | 87 | 91 | 80 | 82 | 74 | 69 | 96 | 85 | 87 | 78 | 79 | 72 | 68 | 80 | 74 | 74 | 70 | 65 | 70 | 67 | 63 | 59 |
| | 3 | 104 | 90 | 95 | 83 | 87 | 78 | 73 | 100 | 87 | 91 | 81 | 84 | 76 | 72 | 84 | 77 | 78 | 73 | 69 | 73 | 70 | 67 | 62 |
| | 4 | 109 | 93 | 101 | 88 | 94 | 83 | 79 | 104 | 90 | 97 | 86 | 91 | 81 | 77 | 89 | 82 | 84 | 78 | 75 | 79 | 75 | 72 | 67 |
| | 5 | 112 | 95 | 105 | 91 | 99 | 87 | 83 | 107 | 92 | 101 | 88 | 96 | 85 | 81 | 93 | 84 | 88 | 81 | 78 | 82 | 78 | 76 | 71 |
| | 7 | 116 | 97 | 111 | 94 | 106 | 91 | 88 | 110 | 95 | 106 | 92 | 101 | 89 | 86 | 97 | 88 | 93 | 85 | 83 | 86 | 82 | 80 | 75 |
| | 10 | 119 | 99 | 115 | 97 | 111 | 94 | 92 | 113 | 97 | 109 | 95 | 106 | 92 | 90 | 100 | 90 | 98 | 89 | 87 | 90 | 85 | 84 | 78 |

配光曲線

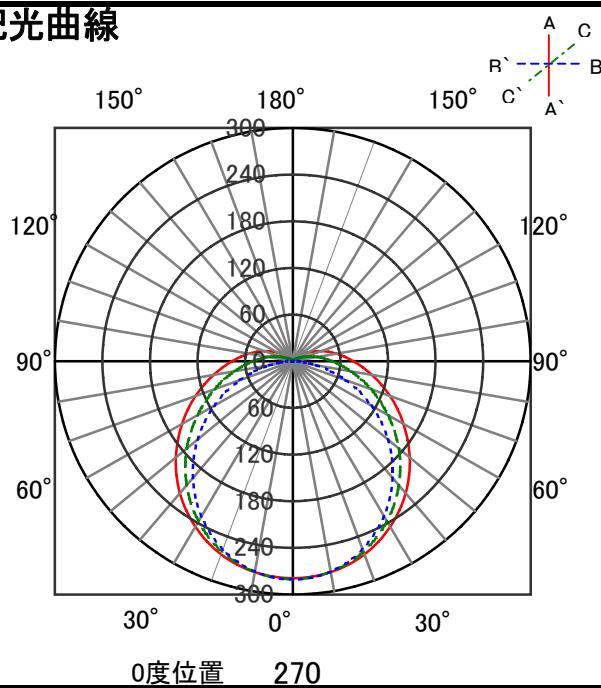


直射水平面照度

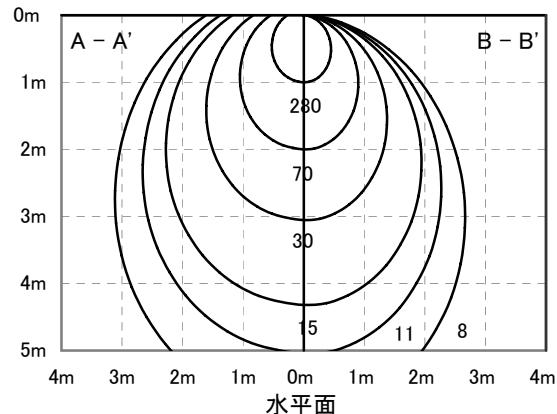

ECOHiLUX照明器具 配光データシート

| | | | |
|------|------------------------|------|--------|
| 器具品名 | 直管型LEDランプ 専用器具 トラフ型 | 保守率 | |
| 器具品番 | IRLDFL21TR | | 良 0.81 |
| 部品品名 | - | | 中 0.77 |
| 部品品番 | - | | 否 0.67 |
| 器具光束 | | 器具効率 | |
| 光源 | LDG20S-N/7/10 | 上方向 | 8% |
| 光源光束 | 1000lm | 下方向 | 84% |
| | | 全方向 | 92% |


意匠図

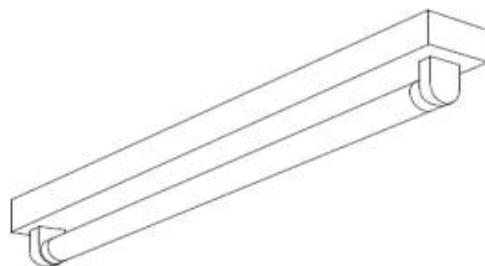


照明率表

| 作業面照明率(×0.01) | | | | | | | | | | | | | | | | 0 | | | | | | | | |
|---------------|------|-----|----|-----|----|-----|----|----|-----|----|-----|----|-----|----|----|-----|----|----|----|----|----|----|----|----|
| 反 射 率 | 天井 | 80 | | | | 70 | | | | 50 | | | | 30 | | | | | | | | | | |
| | 壁 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 30 | 10 | 0 | | | | | | | | |
| | 床 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 0 | | | | | | | | |
| 室 指 数 | 0.4 | 42 | 39 | 29 | 28 | 21 | 21 | 16 | 40 | 38 | 28 | 27 | 21 | 20 | 16 | 26 | 20 | 20 | 16 | 19 | 19 | 15 | 13 | |
| | 0.6 | 57 | 53 | 43 | 41 | 34 | 33 | 28 | 55 | 51 | 42 | 40 | 33 | 33 | 27 | 39 | 38 | 32 | 31 | 27 | 31 | 30 | 26 | 23 |
| | 0.8 | 67 | 61 | 52 | 49 | 42 | 41 | 35 | 64 | 59 | 51 | 48 | 42 | 40 | 34 | 48 | 45 | 40 | 39 | 33 | 38 | 37 | 32 | 29 |
| | 1 | 75 | 68 | 61 | 56 | 51 | 48 | 42 | 72 | 65 | 59 | 55 | 49 | 47 | 41 | 55 | 52 | 47 | 45 | 40 | 45 | 44 | 39 | 36 |
| | 1.25 | 83 | 74 | 69 | 63 | 59 | 56 | 50 | 79 | 71 | 67 | 62 | 58 | 55 | 49 | 63 | 59 | 55 | 53 | 47 | 52 | 51 | 46 | 43 |
| | 1.5 | 88 | 78 | 75 | 68 | 65 | 60 | 54 | 84 | 75 | 72 | 66 | 63 | 59 | 54 | 67 | 63 | 60 | 57 | 52 | 57 | 55 | 50 | 47 |
| | 2 | 96 | 83 | 84 | 75 | 75 | 68 | 62 | 91 | 81 | 81 | 73 | 72 | 67 | 61 | 75 | 70 | 68 | 64 | 60 | 64 | 62 | 58 | 54 |
| | 2.5 | 101 | 87 | 91 | 80 | 82 | 74 | 69 | 96 | 85 | 87 | 78 | 79 | 72 | 68 | 80 | 74 | 74 | 70 | 65 | 70 | 67 | 63 | 59 |
| | 3 | 104 | 90 | 95 | 83 | 87 | 78 | 73 | 100 | 87 | 91 | 81 | 84 | 76 | 72 | 84 | 77 | 78 | 73 | 69 | 73 | 70 | 67 | 62 |
| | 4 | 109 | 93 | 101 | 88 | 94 | 83 | 79 | 104 | 90 | 97 | 86 | 91 | 81 | 77 | 89 | 82 | 84 | 78 | 75 | 79 | 75 | 72 | 67 |
| | 5 | 112 | 95 | 105 | 91 | 99 | 87 | 83 | 107 | 92 | 101 | 88 | 96 | 85 | 81 | 93 | 84 | 88 | 81 | 78 | 82 | 78 | 76 | 71 |
| | 7 | 116 | 97 | 111 | 94 | 106 | 91 | 88 | 110 | 95 | 106 | 92 | 101 | 89 | 86 | 97 | 88 | 93 | 85 | 83 | 86 | 82 | 80 | 75 |
| | 10 | 119 | 99 | 115 | 97 | 111 | 94 | 92 | 113 | 97 | 109 | 95 | 106 | 92 | 90 | 100 | 90 | 98 | 89 | 87 | 90 | 85 | 84 | 78 |

配光曲線

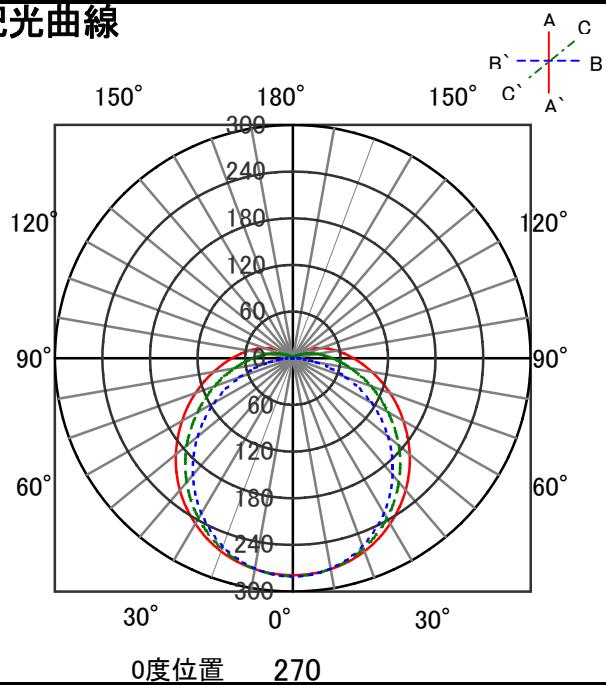


直射水平面照度

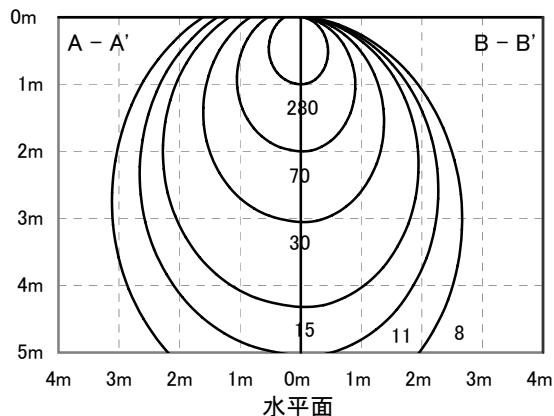

ECOHiLUX照明器具 配光データシート

| | | | |
|------|------------------------|------|------|
| 器具品名 | 直管型LEDランプ 専用器具 トラフ型 | 保守率 | |
| 器具品番 | IRLDFL21TR | 良 | 0.81 |
| 部品品名 | - | 中 | 0.77 |
| 部品品番 | - | 否 | 0.67 |
| 器具効率 | | 器具効率 | |
| 器具光束 | 920lm | 上方向 | 8% |
| 光源 | LDG20S-WW/9/10 | 下方向 | 84% |
| 光源光束 | 1000lm | 全方向 | 92% |


意匠図

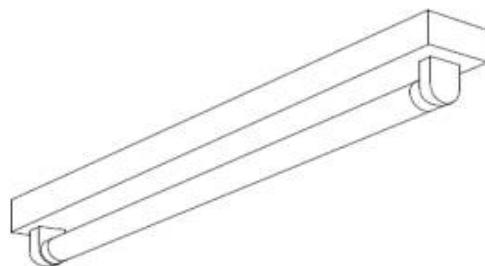


照明率表

| 作業面照明率(×0.01) | | | | | | | | | | | | | | | | 0 | | | | | | | | |
|---------------|------|-----|----|-----|----|-----|----|----|-----|----|-----|----|-----|----|----|-----|----|----|----|----|----|----|----|----|
| 反 射 率 | 天井 | 80 | | | | 70 | | | | 50 | | | | 30 | | | | | | | | | | |
| | 壁 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 50 | 30 | 10 | 30 | 10 | 10 | 30 | | | | | | | | |
| | 床 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 10 | | | | | | | | |
| 室 指 数 | 0.4 | 42 | 39 | 29 | 28 | 21 | 21 | 16 | 40 | 38 | 28 | 27 | 21 | 20 | 16 | 26 | 20 | 20 | 16 | 19 | 19 | 15 | 13 | |
| | 0.6 | 57 | 53 | 43 | 41 | 34 | 33 | 28 | 55 | 51 | 42 | 40 | 33 | 33 | 27 | 39 | 38 | 32 | 31 | 27 | 31 | 30 | 26 | 23 |
| | 0.8 | 67 | 61 | 52 | 49 | 42 | 41 | 35 | 64 | 59 | 51 | 48 | 42 | 40 | 34 | 48 | 45 | 40 | 39 | 33 | 38 | 37 | 32 | 29 |
| | 1 | 75 | 68 | 61 | 56 | 51 | 48 | 42 | 72 | 65 | 59 | 55 | 49 | 47 | 41 | 55 | 52 | 47 | 45 | 40 | 45 | 44 | 39 | 36 |
| | 1.25 | 83 | 74 | 69 | 63 | 59 | 56 | 50 | 79 | 71 | 67 | 62 | 58 | 55 | 49 | 63 | 59 | 55 | 53 | 47 | 52 | 51 | 46 | 43 |
| | 1.5 | 88 | 78 | 75 | 68 | 65 | 60 | 54 | 84 | 75 | 72 | 66 | 63 | 59 | 54 | 67 | 63 | 60 | 57 | 52 | 57 | 55 | 50 | 47 |
| | 2 | 96 | 83 | 84 | 75 | 75 | 68 | 62 | 91 | 81 | 81 | 73 | 72 | 67 | 61 | 75 | 70 | 68 | 64 | 60 | 64 | 62 | 58 | 54 |
| | 2.5 | 101 | 87 | 91 | 80 | 82 | 74 | 69 | 96 | 85 | 87 | 78 | 79 | 72 | 68 | 80 | 74 | 74 | 70 | 65 | 70 | 67 | 63 | 59 |
| | 3 | 104 | 90 | 95 | 83 | 87 | 78 | 73 | 100 | 87 | 91 | 81 | 84 | 76 | 72 | 84 | 77 | 78 | 73 | 69 | 73 | 70 | 67 | 62 |
| | 4 | 109 | 93 | 101 | 88 | 94 | 83 | 79 | 104 | 90 | 97 | 86 | 91 | 81 | 77 | 89 | 82 | 84 | 78 | 75 | 79 | 75 | 72 | 67 |
| | 5 | 112 | 95 | 105 | 91 | 99 | 87 | 83 | 107 | 92 | 101 | 88 | 96 | 85 | 81 | 93 | 84 | 88 | 81 | 78 | 82 | 78 | 76 | 71 |
| | 7 | 116 | 97 | 111 | 94 | 106 | 91 | 88 | 110 | 95 | 106 | 92 | 101 | 89 | 86 | 97 | 88 | 93 | 85 | 83 | 86 | 82 | 80 | 75 |
| | 10 | 119 | 99 | 115 | 97 | 111 | 94 | 92 | 113 | 97 | 109 | 95 | 106 | 92 | 90 | 100 | 90 | 98 | 89 | 87 | 90 | 85 | 84 | 78 |

配光曲線

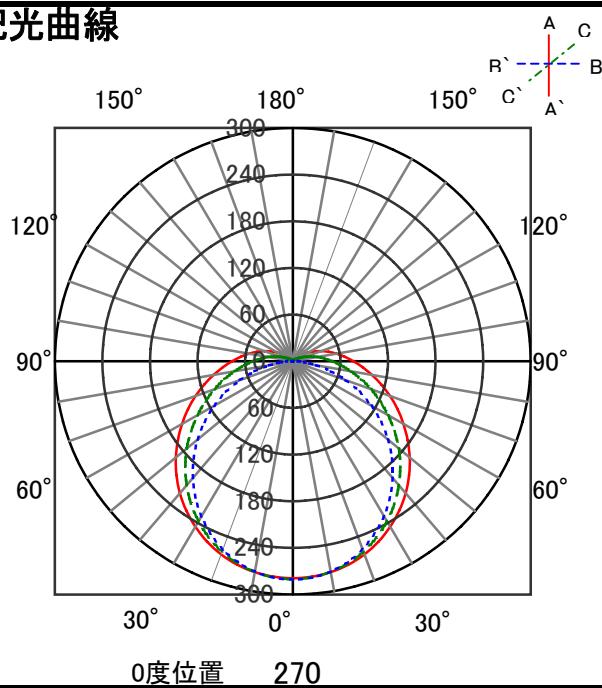


直射水平面照度

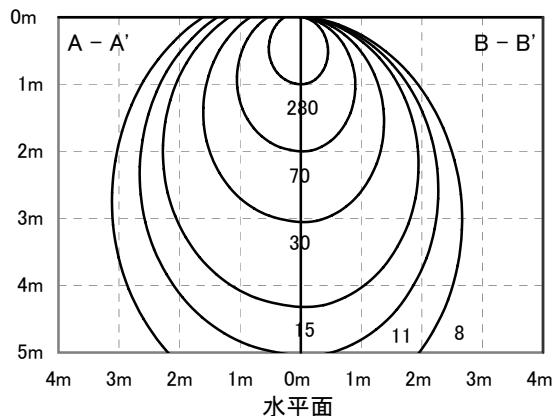

ECOHiLUX照明器具 配光データシート

| | | | |
|------|------------------------|------|------|
| 器具品名 | 直管型LEDランプ 専用器具 トラフ型 | 保守率 | |
| 器具品番 | IRLDL21TR | 良 | 0.81 |
| 部品品名 | - | 中 | 0.77 |
| 部品品番 | - | 否 | 0.67 |
| 器具効率 | | 器具効率 | |
| 器具光束 | 920lm | 上方向 | 8% |
| 光源 | LDG20S-W/8/10 | 下方向 | 84% |
| 光源光束 | 1000lm | 全方向 | 92% |


意匠図

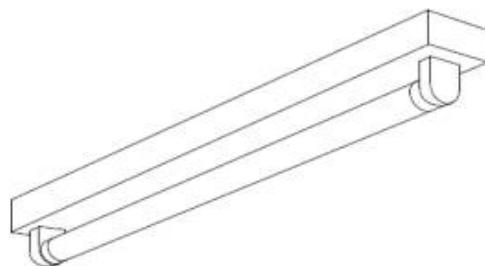


照明率表

| 作業面照明率(×0.01) | | | | | | | | | | | | | | | | 0 | | | | | | | | |
|---------------|------|-----|----|-----|----|-----|----|----|-----|----|-----|----|-----|----|----|-----|----|----|----|----|----|----|----|----|
| 反 射 率 | 天井 | 80 | | | | 70 | | | | 50 | | | | 30 | | | | | | | | | | |
| | 壁 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 50 | 30 | 10 | 30 | 10 | 10 | 30 | | | | | | | | |
| | 床 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 10 | | | | | | | | |
| 室 指 数 | 0.4 | 42 | 39 | 29 | 28 | 21 | 21 | 16 | 40 | 38 | 28 | 27 | 21 | 20 | 16 | 26 | 20 | 20 | 16 | 19 | 19 | 15 | 13 | |
| | 0.6 | 57 | 53 | 43 | 41 | 34 | 33 | 28 | 55 | 51 | 42 | 40 | 33 | 33 | 27 | 39 | 38 | 32 | 31 | 27 | 31 | 30 | 26 | 23 |
| | 0.8 | 67 | 61 | 52 | 49 | 42 | 41 | 35 | 64 | 59 | 51 | 48 | 42 | 40 | 34 | 48 | 45 | 40 | 39 | 33 | 38 | 37 | 32 | 29 |
| | 1 | 75 | 68 | 61 | 56 | 51 | 48 | 42 | 72 | 65 | 59 | 55 | 49 | 47 | 41 | 55 | 52 | 47 | 45 | 40 | 45 | 44 | 39 | 36 |
| | 1.25 | 83 | 74 | 69 | 63 | 59 | 56 | 50 | 79 | 71 | 67 | 62 | 58 | 55 | 49 | 63 | 59 | 55 | 53 | 47 | 52 | 51 | 46 | 43 |
| | 1.5 | 88 | 78 | 75 | 68 | 65 | 60 | 54 | 84 | 75 | 72 | 66 | 63 | 59 | 54 | 67 | 63 | 60 | 57 | 52 | 57 | 55 | 50 | 47 |
| | 2 | 96 | 83 | 84 | 75 | 75 | 68 | 62 | 91 | 81 | 81 | 73 | 72 | 67 | 61 | 75 | 70 | 68 | 64 | 60 | 64 | 62 | 58 | 54 |
| | 2.5 | 101 | 87 | 91 | 80 | 82 | 74 | 69 | 96 | 85 | 87 | 78 | 79 | 72 | 68 | 80 | 74 | 74 | 70 | 65 | 70 | 67 | 63 | 59 |
| | 3 | 104 | 90 | 95 | 83 | 87 | 78 | 73 | 100 | 87 | 91 | 81 | 84 | 76 | 72 | 84 | 77 | 78 | 73 | 69 | 73 | 70 | 67 | 62 |
| | 4 | 109 | 93 | 101 | 88 | 94 | 83 | 79 | 104 | 90 | 97 | 86 | 91 | 81 | 77 | 89 | 82 | 84 | 78 | 75 | 79 | 75 | 72 | 67 |
| | 5 | 112 | 95 | 105 | 91 | 99 | 87 | 83 | 107 | 92 | 101 | 88 | 96 | 85 | 81 | 93 | 84 | 88 | 81 | 78 | 82 | 78 | 76 | 71 |
| | 7 | 116 | 97 | 111 | 94 | 106 | 91 | 88 | 110 | 95 | 106 | 92 | 101 | 89 | 86 | 97 | 88 | 93 | 85 | 83 | 86 | 82 | 80 | 75 |
| | 10 | 119 | 99 | 115 | 97 | 111 | 94 | 92 | 113 | 97 | 109 | 95 | 106 | 92 | 90 | 100 | 90 | 98 | 89 | 87 | 90 | 85 | 84 | 78 |

配光曲線

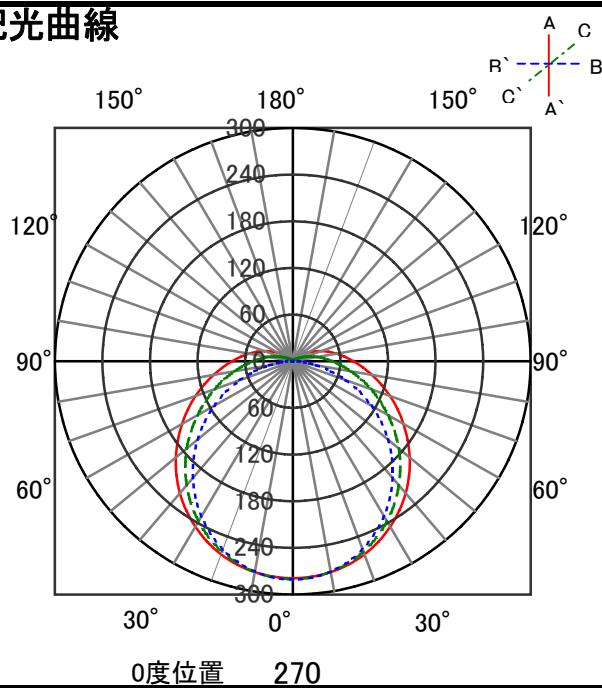


直射水平面照度

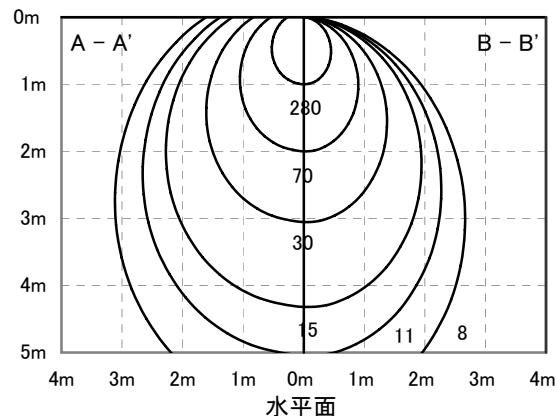

ECOHiLUX照明器具 配光データシート

| | | | |
|------|------------------------|------|--------|
| 器具品名 | 直管型LEDランプ 専用器具 トラフ型 | 保守率 | |
| 器具品番 | IRLDL21TR | | 良 0.81 |
| 部品品名 | - | | 中 0.77 |
| 部品品番 | - | | 否 0.67 |
| 器具光束 | | 器具効率 | |
| 光源 | LDG20S-N/8/10 | 上方向 | 8% |
| 光源光束 | 1000lm | 下方向 | 84% |
| | | 全方向 | 92% |

意匠図

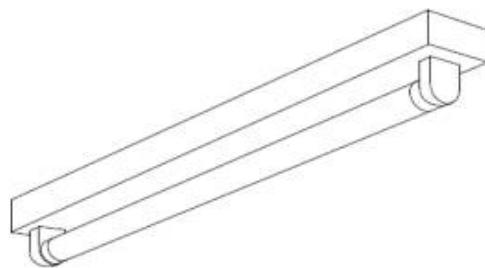


照明率表


作業面照明率(×0.01)

| 反 射 率 | 天井 | | 80 | | | | 70 | | | | 50 | | | | 30 | | | | 0 | | | | | |
|-------------|------|-----|----|-----|----|-----|----|----|-----|----|-----|----|-----|----|----|-----|----|----|----|----|----|----|----|----|
| | 壁 | | 70 | | 50 | | 30 | | 10 | | 70 | | 50 | | 30 | | 10 | | 30 | | 10 | | | |
| | 床 | 30 | 10 | 30 | 10 | 30 | 10 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 10 | 30 | 10 | 30 | 10 | 10 | 30 | 10 | 0 | |
| 室 指 数 | 0.4 | 42 | 39 | 29 | 28 | 21 | 21 | 16 | 40 | 38 | 28 | 27 | 21 | 20 | 16 | 26 | 26 | 20 | 20 | 16 | 19 | 19 | 15 | 13 |
| | 0.6 | 57 | 53 | 43 | 41 | 34 | 33 | 28 | 55 | 51 | 42 | 40 | 33 | 33 | 27 | 39 | 38 | 32 | 31 | 27 | 31 | 30 | 26 | 23 |
| | 0.8 | 67 | 61 | 52 | 49 | 42 | 41 | 35 | 64 | 59 | 51 | 48 | 42 | 40 | 34 | 48 | 45 | 40 | 39 | 33 | 38 | 37 | 32 | 29 |
| | 1 | 75 | 68 | 61 | 56 | 51 | 48 | 42 | 72 | 65 | 59 | 55 | 49 | 47 | 41 | 55 | 52 | 47 | 45 | 40 | 45 | 44 | 39 | 36 |
| | 1.25 | 83 | 74 | 69 | 63 | 59 | 56 | 50 | 79 | 71 | 67 | 62 | 58 | 55 | 49 | 63 | 59 | 55 | 53 | 47 | 52 | 51 | 46 | 43 |
| | 1.5 | 88 | 78 | 75 | 68 | 65 | 60 | 54 | 84 | 75 | 72 | 66 | 63 | 59 | 54 | 67 | 63 | 60 | 57 | 52 | 57 | 55 | 50 | 47 |
| | 2 | 96 | 83 | 84 | 75 | 75 | 68 | 62 | 91 | 81 | 81 | 73 | 72 | 67 | 61 | 75 | 70 | 68 | 64 | 60 | 64 | 62 | 58 | 54 |
| | 2.5 | 101 | 87 | 91 | 80 | 82 | 74 | 69 | 96 | 85 | 87 | 78 | 79 | 72 | 68 | 80 | 74 | 74 | 70 | 65 | 70 | 67 | 63 | 59 |
| | 3 | 104 | 90 | 95 | 83 | 87 | 78 | 73 | 100 | 87 | 91 | 81 | 84 | 76 | 72 | 84 | 77 | 78 | 73 | 69 | 73 | 70 | 67 | 62 |
| | 4 | 109 | 93 | 101 | 88 | 94 | 83 | 79 | 104 | 90 | 97 | 86 | 91 | 81 | 77 | 89 | 82 | 84 | 78 | 75 | 79 | 75 | 72 | 67 |
| | 5 | 112 | 95 | 105 | 91 | 99 | 87 | 83 | 107 | 92 | 101 | 88 | 96 | 85 | 81 | 93 | 84 | 88 | 81 | 78 | 82 | 78 | 76 | 71 |
| | 7 | 116 | 97 | 111 | 94 | 106 | 91 | 88 | 110 | 95 | 106 | 92 | 101 | 89 | 86 | 97 | 88 | 93 | 85 | 83 | 86 | 82 | 80 | 75 |
| | 10 | 119 | 99 | 115 | 97 | 111 | 94 | 92 | 113 | 97 | 109 | 95 | 106 | 92 | 90 | 100 | 90 | 98 | 89 | 87 | 90 | 85 | 84 | 78 |

配光曲線

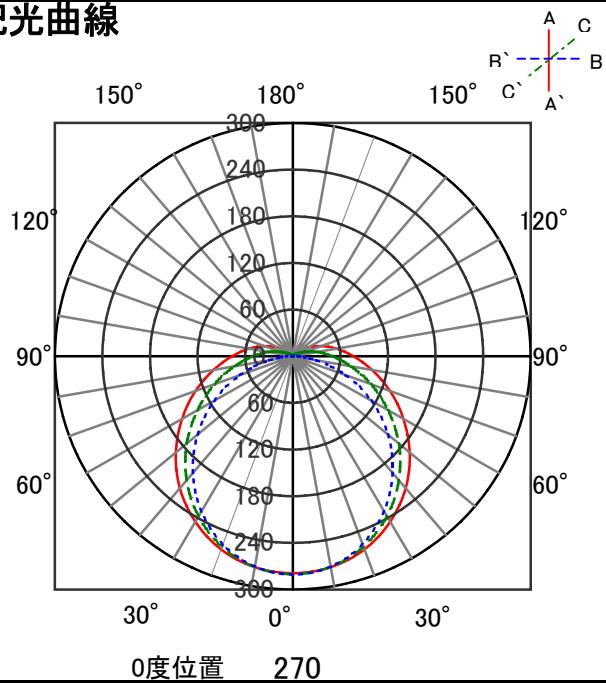


直射水平面照度

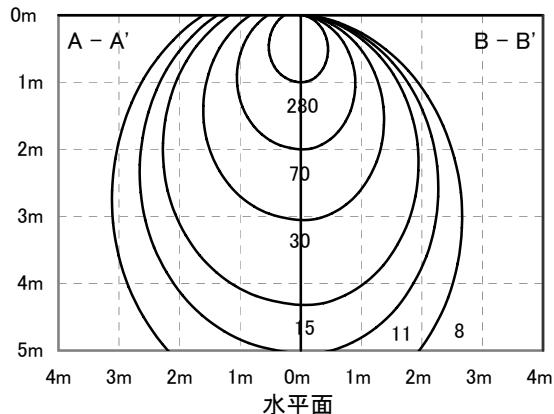

ECOHiLUX照明器具 配光データシート

| | | | |
|------|------------------------|------|------|
| 器具品名 | 直管型LEDランプ 専用器具 トラフ型 | 保守率 | |
| 器具品番 | IRLDFL21TR | 良 | 0.81 |
| 部品品名 | - | 中 | 0.77 |
| 部品品番 | - | 否 | 0.67 |
| 器具効率 | | 器具効率 | |
| 器具光束 | 920lm | 上方向 | 8% |
| 光源 | LDG20S-D/8/10 | 下方向 | 84% |
| 光源光束 | 1000lm | 全方向 | 92% |


意匠図

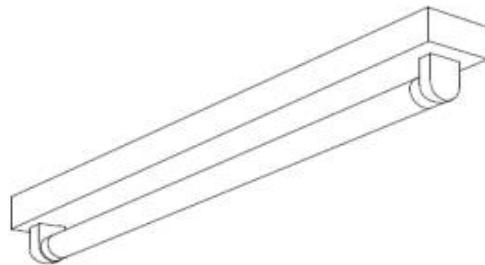


照明率表

| 作業面照明率(×0.01) | | | | | | | | | | | | | | | | 0 | | | | | | | | |
|---------------|------|-----|----|-----|----|-----|----|----|-----|----|-----|----|-----|----|----|-----|----|----|----|----|----|----|----|----|
| 反 射 率 | 天井 | 80 | | | | 70 | | | | 50 | | | | 30 | | | 0 | | | | | | | |
| | 壁 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 0 | | | | | | | |
| | 床 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 0 | | | | | | | |
| 室 指 数 | 0.4 | 42 | 39 | 29 | 28 | 21 | 21 | 16 | 40 | 38 | 28 | 27 | 21 | 20 | 16 | 26 | 20 | 16 | 19 | 19 | 15 | 13 | | |
| | 0.6 | 57 | 53 | 43 | 41 | 34 | 33 | 28 | 55 | 51 | 42 | 40 | 33 | 33 | 27 | 39 | 38 | 32 | 31 | 27 | 31 | 30 | 26 | 23 |
| | 0.8 | 67 | 61 | 52 | 49 | 42 | 41 | 35 | 64 | 59 | 51 | 48 | 42 | 40 | 34 | 48 | 45 | 40 | 39 | 33 | 38 | 37 | 32 | 29 |
| | 1 | 75 | 68 | 61 | 56 | 51 | 48 | 42 | 72 | 65 | 59 | 55 | 49 | 47 | 41 | 55 | 52 | 47 | 45 | 40 | 45 | 44 | 39 | 36 |
| | 1.25 | 83 | 74 | 69 | 63 | 59 | 56 | 50 | 79 | 71 | 67 | 62 | 58 | 55 | 49 | 63 | 59 | 55 | 53 | 47 | 52 | 51 | 46 | 43 |
| | 1.5 | 88 | 78 | 75 | 68 | 65 | 60 | 54 | 84 | 75 | 72 | 66 | 63 | 59 | 54 | 67 | 63 | 60 | 57 | 52 | 57 | 55 | 50 | 47 |
| | 2 | 96 | 83 | 84 | 75 | 75 | 68 | 62 | 91 | 81 | 81 | 73 | 72 | 67 | 61 | 75 | 70 | 68 | 64 | 60 | 64 | 62 | 58 | 54 |
| | 2.5 | 101 | 87 | 91 | 80 | 82 | 74 | 69 | 96 | 85 | 87 | 78 | 79 | 72 | 68 | 80 | 74 | 74 | 70 | 65 | 70 | 67 | 63 | 59 |
| | 3 | 104 | 90 | 95 | 83 | 87 | 78 | 73 | 100 | 87 | 91 | 81 | 84 | 76 | 72 | 84 | 77 | 78 | 73 | 69 | 73 | 70 | 67 | 62 |
| | 4 | 109 | 93 | 101 | 88 | 94 | 83 | 79 | 104 | 90 | 97 | 86 | 91 | 81 | 77 | 89 | 82 | 84 | 78 | 75 | 79 | 75 | 72 | 67 |
| | 5 | 112 | 95 | 105 | 91 | 99 | 87 | 83 | 107 | 92 | 101 | 88 | 96 | 85 | 81 | 93 | 84 | 88 | 81 | 78 | 82 | 78 | 76 | 71 |
| | 7 | 116 | 97 | 111 | 94 | 106 | 91 | 88 | 110 | 95 | 106 | 92 | 101 | 89 | 86 | 97 | 88 | 93 | 85 | 83 | 86 | 82 | 80 | 75 |
| | 10 | 119 | 99 | 115 | 97 | 111 | 94 | 92 | 113 | 97 | 109 | 95 | 106 | 92 | 90 | 100 | 90 | 98 | 89 | 87 | 90 | 85 | 84 | 78 |

配光曲線

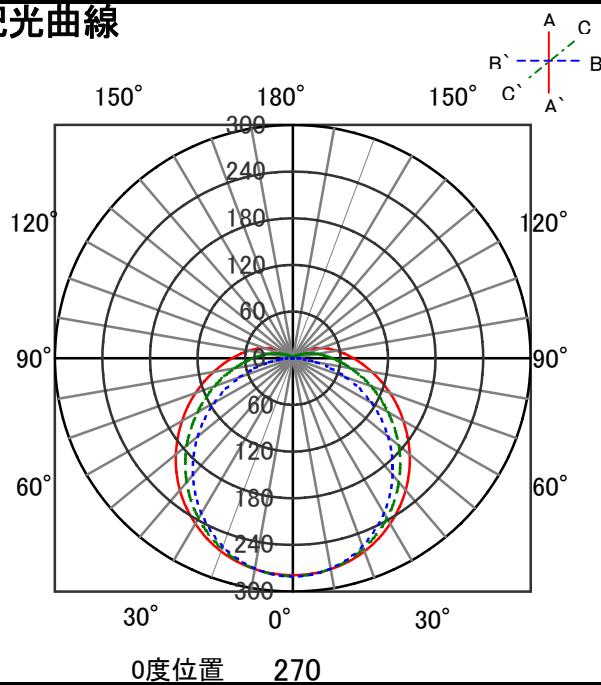


直射水平面照度

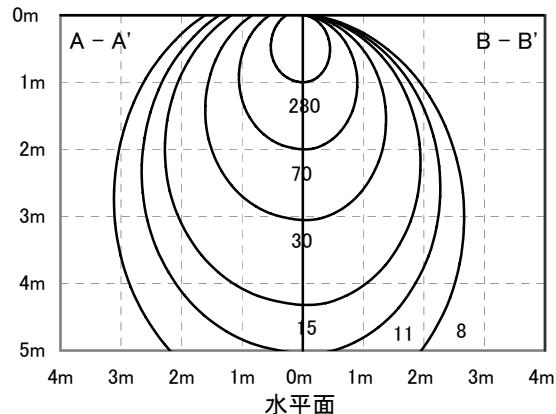

ECOHiLUX照明器具 配光データシート

| | | | |
|------|------------------------|------|--------|
| 器具品名 | 直管形LEDランプ 専用器具 トラフ型 | 保守率 | |
| 器具品番 | IRLDFL21TR | | 良 0.81 |
| 部品品名 | - | | 中 0.77 |
| 部品品番 | - | | 否 0.67 |
| 器具効率 | | 器具効率 | |
| 器具光束 | 920lm | 上方向 | 8% |
| 光源 | LDG20S-WW/12/10/D | 下方向 | 84% |
| 光源光束 | 1000lm | 全方向 | 92% |


意匠図

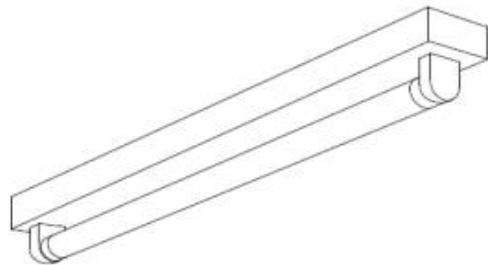


照明率表

| 作業面照明率(×0.01) | | | | | | | | | | | | | | | | 0 | | | | | | | | |
|---------------|------|-----|----|-----|----|-----|----|----|-----|----|-----|----|-----|----|----|-----|----|----|----|----|----|----|----|----|
| 反 射 率 | 天井 | 80 | | | | 70 | | | | 50 | | | | 30 | | 0 | | | | | | | | |
| | 壁 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | | | | | | | | |
| | 床 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 10 | | | | | | | | |
| 室 指 数 | 0.4 | 42 | 39 | 29 | 28 | 21 | 21 | 16 | 40 | 38 | 28 | 27 | 21 | 20 | 16 | 26 | 20 | 20 | 16 | 19 | 19 | 15 | 13 | |
| | 0.6 | 57 | 53 | 43 | 41 | 34 | 33 | 28 | 55 | 51 | 42 | 40 | 33 | 33 | 27 | 39 | 38 | 32 | 31 | 27 | 31 | 30 | 26 | 23 |
| | 0.8 | 67 | 61 | 52 | 49 | 42 | 41 | 35 | 64 | 59 | 51 | 48 | 42 | 40 | 34 | 48 | 45 | 40 | 39 | 33 | 38 | 37 | 32 | 29 |
| | 1 | 75 | 68 | 61 | 56 | 51 | 48 | 42 | 72 | 65 | 59 | 55 | 49 | 47 | 41 | 55 | 52 | 47 | 45 | 40 | 45 | 44 | 39 | 36 |
| | 1.25 | 83 | 74 | 69 | 63 | 59 | 56 | 50 | 79 | 71 | 67 | 62 | 58 | 55 | 49 | 63 | 59 | 55 | 53 | 47 | 52 | 51 | 46 | 43 |
| | 1.5 | 88 | 78 | 75 | 68 | 65 | 60 | 54 | 84 | 75 | 72 | 66 | 63 | 59 | 54 | 67 | 63 | 60 | 57 | 52 | 57 | 55 | 50 | 47 |
| | 2 | 96 | 83 | 84 | 75 | 75 | 68 | 62 | 91 | 81 | 81 | 73 | 72 | 67 | 61 | 75 | 70 | 68 | 64 | 60 | 64 | 62 | 58 | 54 |
| | 2.5 | 101 | 87 | 91 | 80 | 82 | 74 | 69 | 96 | 85 | 87 | 78 | 79 | 72 | 68 | 80 | 74 | 74 | 70 | 65 | 70 | 67 | 63 | 59 |
| | 3 | 104 | 90 | 95 | 83 | 87 | 78 | 73 | 100 | 87 | 91 | 81 | 84 | 76 | 72 | 84 | 77 | 78 | 73 | 69 | 73 | 70 | 67 | 62 |
| | 4 | 109 | 93 | 101 | 88 | 94 | 83 | 79 | 104 | 90 | 97 | 86 | 91 | 81 | 77 | 89 | 82 | 84 | 78 | 75 | 79 | 75 | 72 | 67 |
| | 5 | 112 | 95 | 105 | 91 | 99 | 87 | 83 | 107 | 92 | 101 | 88 | 96 | 85 | 81 | 93 | 84 | 88 | 81 | 78 | 82 | 78 | 76 | 71 |
| | 7 | 116 | 97 | 111 | 94 | 106 | 91 | 88 | 110 | 95 | 106 | 92 | 101 | 89 | 86 | 97 | 88 | 93 | 85 | 83 | 86 | 82 | 80 | 75 |
| | 10 | 119 | 99 | 115 | 97 | 111 | 94 | 92 | 113 | 97 | 109 | 95 | 106 | 92 | 90 | 100 | 90 | 98 | 89 | 87 | 90 | 85 | 84 | 78 |

配光曲線

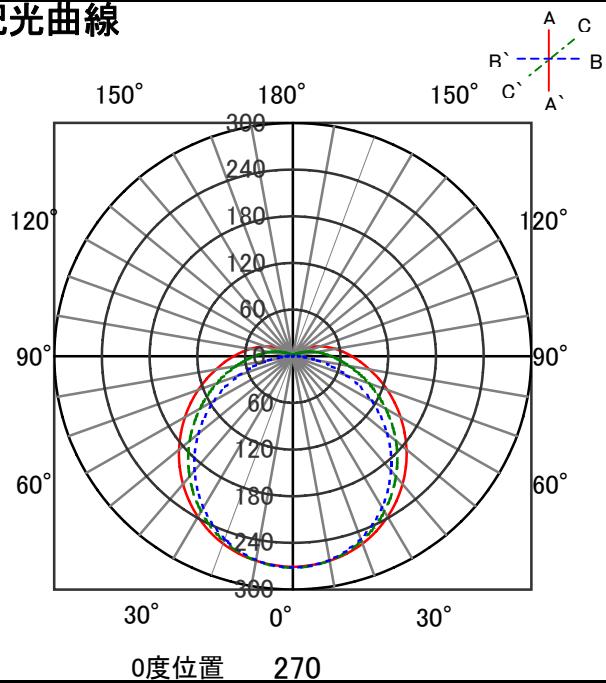


直射水平面照度

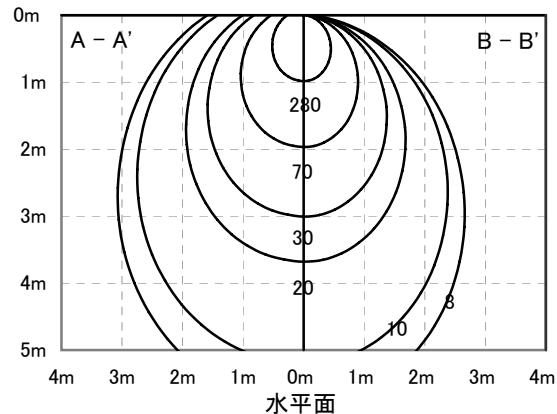

ECOHiLUX照明器具 配光データシート

| | | | |
|------|------------------------|------|------|
| 器具品名 | 直管形LEDランプ 専用器具 トラフ型 | 保守率 | |
| 器具品番 | IRLDL21TR | 良 | 0.81 |
| 部品品名 | - | 中 | 0.77 |
| 部品品番 | - | 否 | 0.67 |
| 器具効率 | | 器具効率 | |
| 器具光束 | 920lm | 上方向 | 8% |
| 光源 | LDG20S-W/12/10/D | 下方向 | 84% |
| 光源光束 | 1000lm | 全方向 | 92% |


意匠図

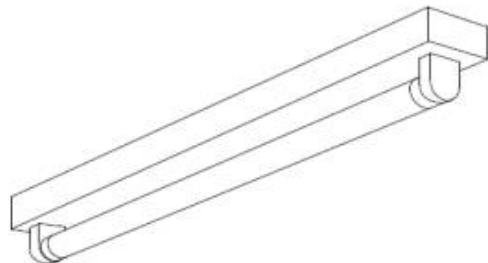


照明率表

| 作業面照明率(×0.01) | | | | | | | | | | | | | | | | | 30 | | 0 | | | | | |
|---------------|------|-----|----|-----|----|-----|----|----|-----|----|-----|----|-----|----|----|-----|----|----|----|----|----|----|----|----|
| 反 射 率 | 天井 | 80 | | | | | | 70 | | | | | | 50 | | | | | | 10 | | | | |
| | 壁 | 70 | | 50 | | 30 | | 10 | | 70 | | 50 | | 30 | | 10 | | 50 | | 0 | | | | |
| | 床 | 30 | 10 | 30 | 10 | 30 | 10 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 10 | 30 | 10 | 10 | 30 | 10 | 0 | | | |
| 室 指 数 | 0.4 | 42 | 39 | 29 | 28 | 21 | 21 | 16 | 40 | 38 | 28 | 27 | 21 | 20 | 16 | 26 | 26 | 20 | 20 | 16 | 19 | 19 | 15 | 13 |
| | 0.6 | 57 | 53 | 43 | 41 | 34 | 33 | 28 | 55 | 51 | 42 | 40 | 33 | 33 | 27 | 39 | 38 | 32 | 31 | 27 | 31 | 30 | 26 | 23 |
| | 0.8 | 67 | 61 | 52 | 49 | 42 | 41 | 35 | 64 | 59 | 51 | 48 | 42 | 40 | 34 | 48 | 45 | 40 | 39 | 33 | 38 | 37 | 32 | 29 |
| | 1 | 75 | 68 | 61 | 56 | 51 | 48 | 42 | 72 | 65 | 59 | 55 | 49 | 47 | 41 | 55 | 52 | 47 | 45 | 40 | 45 | 44 | 39 | 36 |
| | 1.25 | 83 | 74 | 69 | 63 | 59 | 56 | 50 | 79 | 71 | 67 | 62 | 58 | 55 | 49 | 63 | 59 | 55 | 53 | 47 | 52 | 51 | 46 | 43 |
| | 1.5 | 88 | 78 | 75 | 68 | 65 | 60 | 54 | 84 | 75 | 72 | 66 | 63 | 59 | 54 | 67 | 63 | 60 | 57 | 52 | 57 | 55 | 50 | 47 |
| | 2 | 96 | 83 | 84 | 75 | 75 | 68 | 62 | 91 | 81 | 81 | 73 | 72 | 67 | 61 | 75 | 70 | 68 | 64 | 60 | 64 | 62 | 58 | 54 |
| | 2.5 | 101 | 87 | 91 | 80 | 82 | 74 | 69 | 96 | 85 | 87 | 78 | 79 | 72 | 68 | 80 | 74 | 74 | 70 | 65 | 70 | 67 | 63 | 59 |
| | 3 | 104 | 90 | 95 | 83 | 87 | 78 | 73 | 100 | 87 | 91 | 81 | 84 | 76 | 72 | 84 | 77 | 78 | 73 | 69 | 73 | 70 | 67 | 62 |
| | 4 | 109 | 93 | 101 | 88 | 94 | 83 | 79 | 104 | 90 | 97 | 86 | 91 | 81 | 77 | 89 | 82 | 84 | 78 | 75 | 79 | 75 | 72 | 67 |
| | 5 | 112 | 95 | 105 | 91 | 99 | 87 | 83 | 107 | 92 | 101 | 88 | 96 | 85 | 81 | 93 | 84 | 88 | 81 | 78 | 82 | 78 | 76 | 71 |
| | 7 | 116 | 97 | 111 | 94 | 106 | 91 | 88 | 110 | 95 | 106 | 92 | 101 | 89 | 86 | 97 | 88 | 93 | 85 | 83 | 86 | 82 | 80 | 75 |
| | 10 | 119 | 99 | 115 | 97 | 111 | 94 | 92 | 113 | 97 | 109 | 95 | 106 | 92 | 90 | 100 | 90 | 98 | 89 | 87 | 90 | 85 | 84 | 78 |

配光曲線

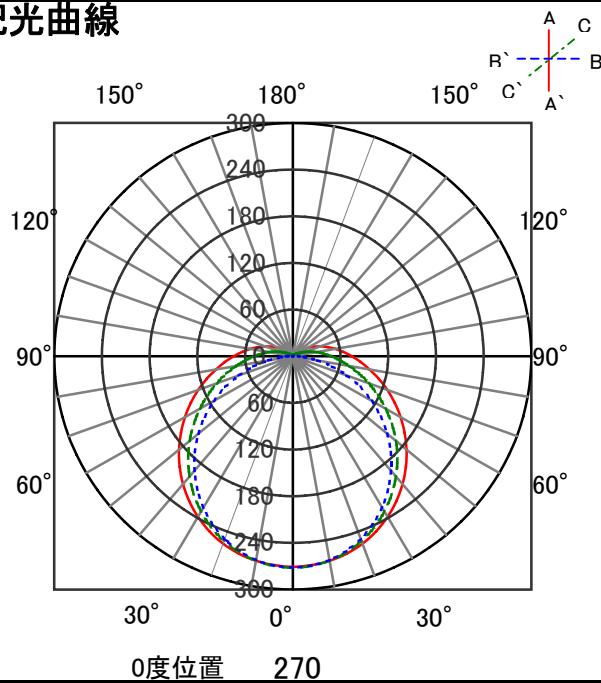


直射水平面照度

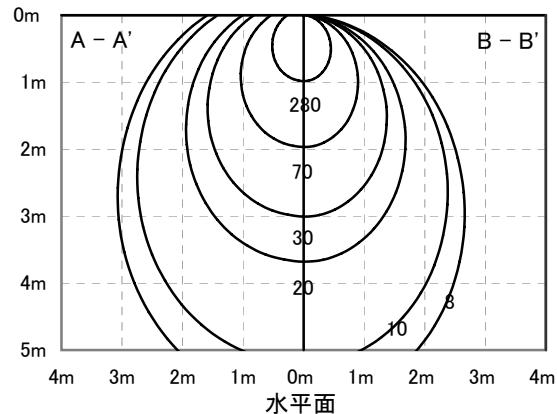

ECOHiLUX照明器具 配光データシート

| 器具品名 | 直管形LEDランプ 専用器具 トラフ型 | 保守率 | |
|------|------------------------|-----|---------|
| | | 良 | 0.81 |
| 器具品番 | IRLDL21TR | | 0.77 |
| | - | | 0.67 |
| 部品品名 | - | | 器具効率 |
| | - | | |
| 器具光束 | 920lm | | 上方向 8% |
| | 光源 LDG20S-N/12/10/D | | 下方向 84% |
| 光源光束 | 1000lm | | 全方向 92% |
| | | | |


意匠図

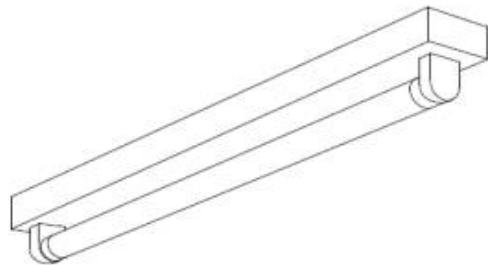


照明率表

| 作業面照明率(×0.01) | | | | | | | | | | | | | | | | 0 | | | | | | | | |
|---------------|------|-----|----|-----|----|-----|----|----|-----|----|-----|----|-----|----|----|-----|----|----|----|----|----|----|----|----|
| 反 射 率 | 天井 | 80 | | | | 70 | | | | 50 | | | | 30 | | | | | | | | | | |
| | 壁 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 30 | 10 | 0 | | | | | | | | |
| | 床 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 0 | | | | | | | | |
| 室 指 数 | 0.4 | 42 | 39 | 29 | 28 | 21 | 21 | 16 | 40 | 38 | 28 | 27 | 21 | 20 | 16 | 26 | 20 | 20 | 16 | 19 | 19 | 15 | 13 | |
| | 0.6 | 57 | 53 | 43 | 41 | 34 | 33 | 28 | 55 | 51 | 42 | 40 | 33 | 33 | 27 | 39 | 38 | 32 | 31 | 27 | 31 | 30 | 26 | 23 |
| | 0.8 | 67 | 61 | 52 | 49 | 42 | 41 | 35 | 64 | 59 | 51 | 48 | 42 | 40 | 34 | 48 | 45 | 40 | 39 | 33 | 38 | 37 | 32 | 29 |
| | 1 | 75 | 68 | 61 | 56 | 51 | 48 | 42 | 72 | 65 | 59 | 55 | 49 | 47 | 41 | 55 | 52 | 47 | 45 | 40 | 45 | 44 | 39 | 36 |
| | 1.25 | 83 | 74 | 69 | 63 | 59 | 56 | 50 | 79 | 71 | 67 | 62 | 58 | 55 | 49 | 63 | 59 | 55 | 53 | 47 | 52 | 51 | 46 | 43 |
| | 1.5 | 88 | 78 | 75 | 68 | 65 | 60 | 54 | 84 | 75 | 72 | 66 | 63 | 59 | 54 | 67 | 63 | 60 | 57 | 52 | 57 | 55 | 50 | 47 |
| | 2 | 96 | 83 | 84 | 75 | 75 | 68 | 62 | 91 | 81 | 81 | 73 | 72 | 67 | 61 | 75 | 70 | 68 | 64 | 60 | 64 | 62 | 58 | 54 |
| | 2.5 | 101 | 87 | 91 | 80 | 82 | 74 | 69 | 96 | 85 | 87 | 78 | 79 | 72 | 68 | 80 | 74 | 74 | 70 | 65 | 70 | 67 | 63 | 59 |
| | 3 | 104 | 90 | 95 | 83 | 87 | 78 | 73 | 100 | 87 | 91 | 81 | 84 | 76 | 72 | 84 | 77 | 78 | 73 | 69 | 73 | 70 | 67 | 62 |
| | 4 | 109 | 93 | 101 | 88 | 94 | 83 | 79 | 104 | 90 | 97 | 86 | 91 | 81 | 77 | 89 | 82 | 84 | 78 | 75 | 79 | 75 | 72 | 67 |
| | 5 | 112 | 95 | 105 | 91 | 99 | 87 | 83 | 107 | 92 | 101 | 88 | 96 | 85 | 81 | 93 | 84 | 88 | 81 | 78 | 82 | 78 | 76 | 71 |
| | 7 | 116 | 97 | 111 | 94 | 106 | 91 | 88 | 110 | 95 | 106 | 92 | 101 | 89 | 86 | 97 | 88 | 93 | 85 | 83 | 86 | 82 | 80 | 75 |
| | 10 | 119 | 99 | 115 | 97 | 111 | 94 | 92 | 113 | 97 | 109 | 95 | 106 | 92 | 90 | 100 | 90 | 98 | 89 | 87 | 90 | 85 | 84 | 78 |

配光曲線

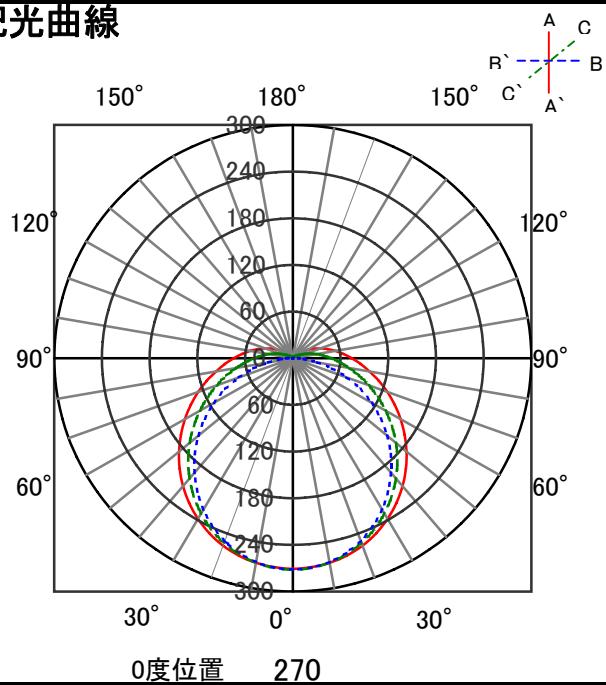


直射水平面照度

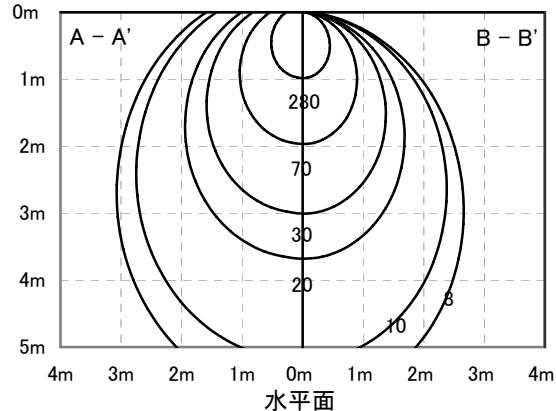

ECOHiLUX照明器具 配光データシート

| 器具品名 | 直管形LEDランプ 専用器具 トラフ型 | 保守率 | |
|------|------------------------|-----|---------|
| | | 良 | 0.81 |
| 器具品番 | IRLDFL21TR | | 0.77 |
| | - | | 0.67 |
| 部品品名 | - | | 器具効率 |
| | - | | |
| 器具光束 | 920lm | | 上方向 8% |
| | 光源 LDGR20S-WW/12/10 | | 下方向 84% |
| 光源光束 | 1000lm | | 全方向 92% |
| | | | |


意匠図

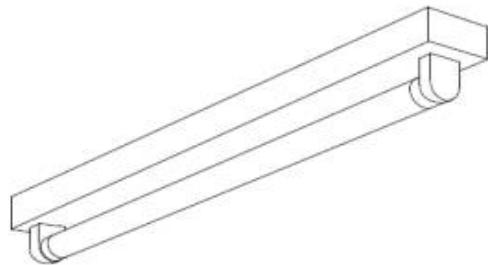


照明率表

| 作業面照明率(×0.01) | | | | | | | | | | | | | | | | | | | | | | | | |
|---------------|------|-----|----|-----|----|-----|----|----|-----|----|-----|----|-----|----|----|-----|----|----|----|----|----|----|----|----|
| 反 射 率 | 天井 | 80 | | | | 70 | | | | 50 | | | | 30 | | | | | | | | | | |
| | 壁 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | | | | | | | |
| | 床 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | | | | | | | |
| 室 指 数 | 0.4 | 42 | 39 | 29 | 28 | 21 | 21 | 16 | 40 | 38 | 28 | 27 | 21 | 20 | 16 | 26 | 20 | 16 | 19 | 19 | 15 | 13 | | |
| | 0.6 | 57 | 53 | 43 | 41 | 34 | 33 | 28 | 55 | 51 | 42 | 40 | 33 | 33 | 27 | 39 | 38 | 32 | 31 | 27 | 31 | 30 | 26 | 23 |
| | 0.8 | 67 | 61 | 52 | 49 | 42 | 41 | 35 | 64 | 59 | 51 | 48 | 42 | 40 | 34 | 48 | 45 | 40 | 39 | 33 | 38 | 37 | 32 | 29 |
| | 1 | 75 | 68 | 61 | 56 | 51 | 48 | 42 | 72 | 65 | 59 | 55 | 49 | 47 | 41 | 55 | 52 | 47 | 45 | 40 | 45 | 44 | 39 | 36 |
| | 1.25 | 83 | 74 | 69 | 63 | 59 | 56 | 50 | 79 | 71 | 67 | 62 | 58 | 55 | 49 | 63 | 59 | 55 | 53 | 47 | 52 | 51 | 46 | 43 |
| | 1.5 | 88 | 78 | 75 | 68 | 65 | 60 | 54 | 84 | 75 | 72 | 66 | 63 | 59 | 54 | 67 | 63 | 60 | 57 | 52 | 57 | 55 | 50 | 47 |
| | 2 | 96 | 83 | 84 | 75 | 75 | 68 | 62 | 91 | 81 | 81 | 73 | 72 | 67 | 61 | 75 | 70 | 68 | 64 | 60 | 64 | 62 | 58 | 54 |
| | 2.5 | 101 | 87 | 91 | 80 | 82 | 74 | 69 | 96 | 85 | 87 | 78 | 79 | 72 | 68 | 80 | 74 | 74 | 70 | 65 | 70 | 67 | 63 | 59 |
| | 3 | 104 | 90 | 95 | 83 | 87 | 78 | 73 | 100 | 87 | 91 | 81 | 84 | 76 | 72 | 84 | 77 | 78 | 73 | 69 | 73 | 70 | 67 | 62 |
| | 4 | 109 | 93 | 101 | 88 | 94 | 83 | 79 | 104 | 90 | 97 | 86 | 91 | 81 | 77 | 89 | 82 | 84 | 78 | 75 | 79 | 75 | 72 | 67 |
| | 5 | 112 | 95 | 105 | 91 | 99 | 87 | 83 | 107 | 92 | 101 | 88 | 96 | 85 | 81 | 93 | 84 | 88 | 81 | 78 | 82 | 78 | 76 | 71 |
| | 7 | 116 | 97 | 111 | 94 | 106 | 91 | 88 | 110 | 95 | 106 | 92 | 101 | 89 | 86 | 97 | 88 | 93 | 85 | 83 | 86 | 82 | 80 | 75 |
| | 10 | 119 | 99 | 115 | 97 | 111 | 94 | 92 | 113 | 97 | 109 | 95 | 106 | 92 | 90 | 100 | 90 | 98 | 89 | 87 | 90 | 85 | 84 | 78 |

配光曲線

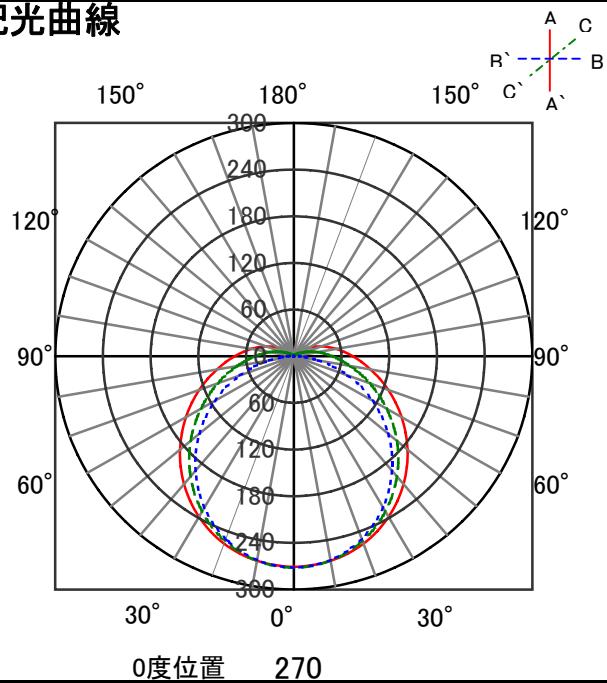


直射水平面照度

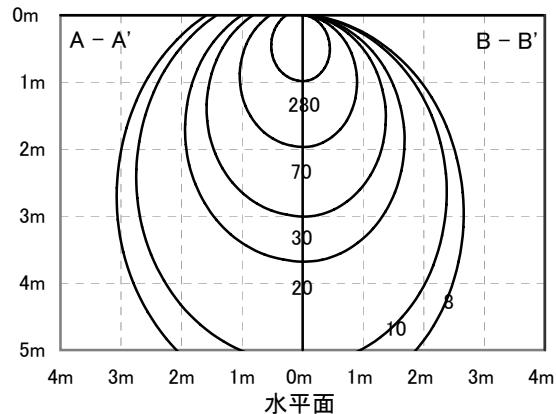

ECOHiLUX照明器具 配光データシート

| 器具品名 | 直管形LEDランプ 専用器具 トラフ型 | 保守率 | |
|------|------------------------|-----|---------|
| | | 良 | 0.81 |
| 器具品番 | IRLDFL21TR | | 0.77 |
| | - | | 0.67 |
| 部品品名 | - | | 器具効率 |
| | - | | |
| 器具光束 | 920lm | | 上方向 8% |
| | 光源 LDGR20S-W/12/10 | | 下方向 84% |
| 光源光束 | 1000lm | | 全方向 92% |


意匠図

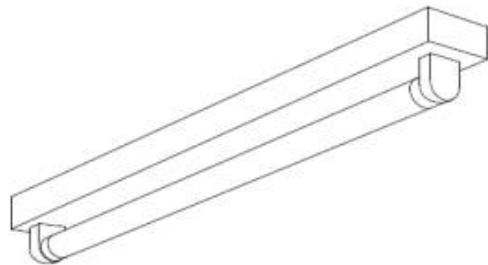


照明率表

| 反 射 率 | 天井 | 作業面照明率(×0.01) | | | | | | | | | | | | 0 | |
|-------------|------|---------------|----|-----|----|-----|----|----|-----|----|-----|----|-----|----|--|
| | | 80 | | | 70 | | | 50 | | | 30 | | | | |
| | | 壁 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 50 | 30 | 10 | | |
| 室 指 数 | 床 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 0 | |
| | 0.4 | 42 | 39 | 29 | 28 | 21 | 21 | 16 | 40 | 38 | 28 | 27 | 21 | 20 | |
| | 0.6 | 57 | 53 | 43 | 41 | 34 | 33 | 28 | 55 | 51 | 42 | 40 | 33 | 27 | |
| | 0.8 | 67 | 61 | 52 | 49 | 42 | 41 | 35 | 64 | 59 | 51 | 48 | 42 | 40 | |
| | 1 | 75 | 68 | 61 | 56 | 51 | 48 | 42 | 72 | 65 | 59 | 55 | 49 | 47 | |
| | 1.25 | 83 | 74 | 69 | 63 | 59 | 56 | 50 | 79 | 71 | 67 | 62 | 58 | 55 | |
| | 1.5 | 88 | 78 | 75 | 68 | 65 | 60 | 54 | 84 | 75 | 72 | 66 | 63 | 59 | |
| | 2 | 96 | 83 | 84 | 75 | 75 | 68 | 62 | 91 | 81 | 81 | 73 | 72 | 67 | |
| | 2.5 | 101 | 87 | 91 | 80 | 82 | 74 | 69 | 96 | 85 | 87 | 78 | 79 | 72 | |
| | 3 | 104 | 90 | 95 | 83 | 87 | 78 | 73 | 100 | 87 | 91 | 81 | 84 | 76 | |
| 指 数 | 4 | 109 | 93 | 101 | 88 | 94 | 83 | 79 | 104 | 90 | 97 | 86 | 91 | 81 | |
| | 5 | 112 | 95 | 105 | 91 | 99 | 87 | 83 | 107 | 92 | 101 | 88 | 96 | 85 | |
| | 7 | 116 | 97 | 111 | 94 | 106 | 91 | 88 | 110 | 95 | 106 | 92 | 101 | 89 | |
| | 10 | 119 | 99 | 115 | 97 | 111 | 94 | 92 | 113 | 97 | 109 | 95 | 106 | 92 | |

配光曲線

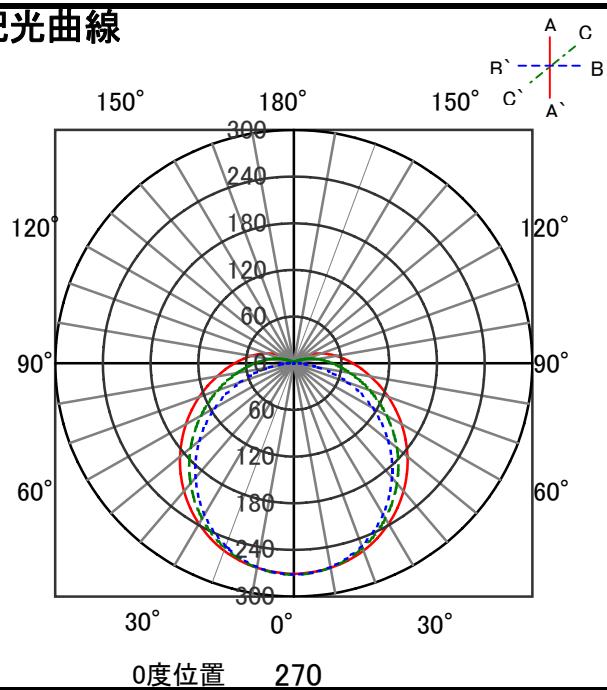


直射水平面照度

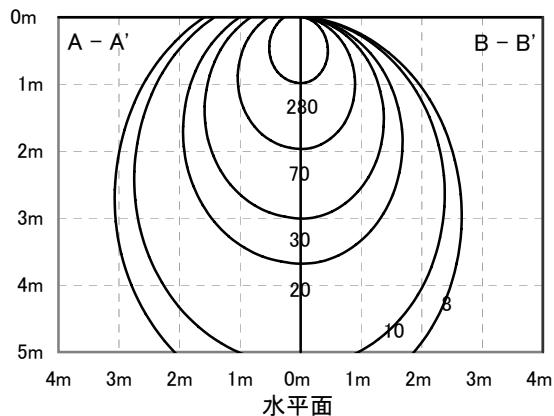

ECOHiLUX照明器具 配光データシート

| | | | |
|------|------------------------|------|--------|
| 器具品名 | 直管形LEDランプ 専用器具 トラフ型 | 保守率 | |
| 器具品番 | IRLDFL21TR | | 良 0.81 |
| 部品品名 | - | | 中 0.77 |
| 部品品番 | - | | 否 0.67 |
| 器具効率 | | 器具効率 | |
| 器具光束 | 920lm | 上方向 | 8% |
| 光源 | LDGR20S-N/12/10 | 下方向 | 84% |
| 光源光束 | 1000lm | 全方向 | 92% |


意匠図

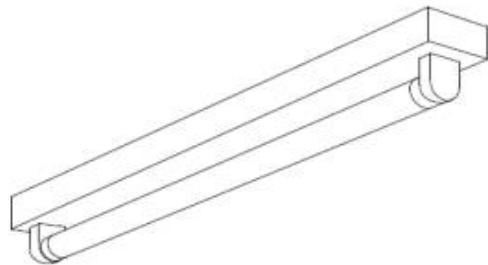


照明率表

| 作業面照明率(×0.01) | | | | | | | | | | | | | | | | 0 | | | | | | | | |
|---------------|------|-----|----|-----|----|-----|----|----|-----|----|-----|----|-----|----|----|-----|----|----|----|----|----|----|----|----|
| 反 射 率 | 天井 | 80 | | | | 70 | | | | 50 | | | | 30 | | | | | | | | | | |
| | 壁 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 50 | 30 | 10 | 30 | 10 | 10 | 30 | | | | | | | | |
| | 床 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 10 | | | | | | | | |
| 室 指 数 | 0.4 | 42 | 39 | 29 | 28 | 21 | 21 | 16 | 40 | 38 | 28 | 27 | 21 | 20 | 16 | 26 | 20 | 20 | 16 | 19 | 19 | 15 | 13 | |
| | 0.6 | 57 | 53 | 43 | 41 | 34 | 33 | 28 | 55 | 51 | 42 | 40 | 33 | 33 | 27 | 39 | 38 | 32 | 31 | 27 | 31 | 30 | 26 | 23 |
| | 0.8 | 67 | 61 | 52 | 49 | 42 | 41 | 35 | 64 | 59 | 51 | 48 | 42 | 40 | 34 | 48 | 45 | 40 | 39 | 33 | 38 | 37 | 32 | 29 |
| | 1 | 75 | 68 | 61 | 56 | 51 | 48 | 42 | 72 | 65 | 59 | 55 | 49 | 47 | 41 | 55 | 52 | 47 | 45 | 40 | 45 | 44 | 39 | 36 |
| | 1.25 | 83 | 74 | 69 | 63 | 59 | 56 | 50 | 79 | 71 | 67 | 62 | 58 | 55 | 49 | 63 | 59 | 55 | 53 | 47 | 52 | 51 | 46 | 43 |
| | 1.5 | 88 | 78 | 75 | 68 | 65 | 60 | 54 | 84 | 75 | 72 | 66 | 63 | 59 | 54 | 67 | 63 | 60 | 57 | 52 | 57 | 55 | 50 | 47 |
| | 2 | 96 | 83 | 84 | 75 | 75 | 68 | 62 | 91 | 81 | 81 | 73 | 72 | 67 | 61 | 75 | 70 | 68 | 64 | 60 | 64 | 62 | 58 | 54 |
| | 2.5 | 101 | 87 | 91 | 80 | 82 | 74 | 69 | 96 | 85 | 87 | 78 | 79 | 72 | 68 | 80 | 74 | 74 | 70 | 65 | 70 | 67 | 63 | 59 |
| | 3 | 104 | 90 | 95 | 83 | 87 | 78 | 73 | 100 | 87 | 91 | 81 | 84 | 76 | 72 | 84 | 77 | 78 | 73 | 69 | 73 | 70 | 67 | 62 |
| | 4 | 109 | 93 | 101 | 88 | 94 | 83 | 79 | 104 | 90 | 97 | 86 | 91 | 81 | 77 | 89 | 82 | 84 | 78 | 75 | 79 | 75 | 72 | 67 |
| | 5 | 112 | 95 | 105 | 91 | 99 | 87 | 83 | 107 | 92 | 101 | 88 | 96 | 85 | 81 | 93 | 84 | 88 | 81 | 78 | 82 | 78 | 76 | 71 |
| | 7 | 116 | 97 | 111 | 94 | 106 | 91 | 88 | 110 | 95 | 106 | 92 | 101 | 89 | 86 | 97 | 88 | 93 | 85 | 83 | 86 | 82 | 80 | 75 |
| | 10 | 119 | 99 | 115 | 97 | 111 | 94 | 92 | 113 | 97 | 109 | 95 | 106 | 92 | 90 | 100 | 90 | 98 | 89 | 87 | 90 | 85 | 84 | 78 |

配光曲線

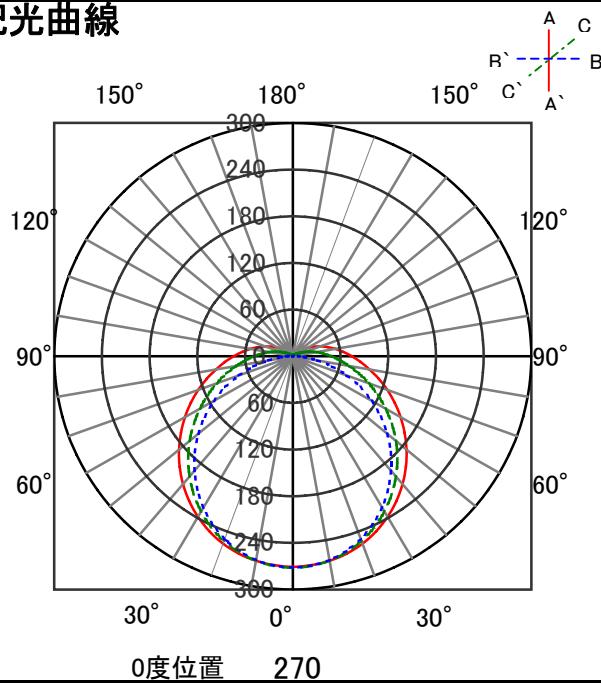


直射水平面照度

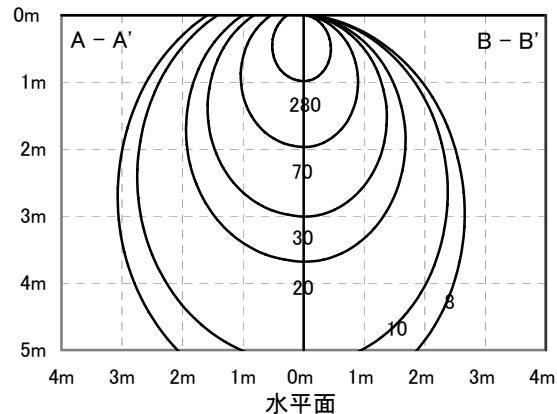

ECOHiLUX照明器具 配光データシート

| | | | |
|------|------------------------|------|--------|
| 器具品名 | 直管形LEDランプ 専用器具 トラフ型 | 保守率 | |
| 器具品番 | IRLDL21TR | | 良 0.81 |
| 部品品名 | - | | 中 0.77 |
| 部品品番 | - | | 否 0.67 |
| 器具効率 | | 器具効率 | |
| 器具光束 | 920lm | 上方向 | 8% |
| 光源 | LDFL1000WS-H40 | 下方向 | 84% |
| 光源光束 | 1000lm | 全方向 | 92% |


意匠図

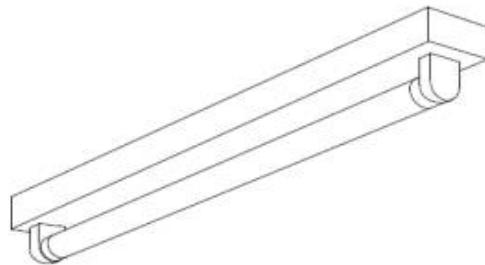


照明率表

| 作業面照明率(×0.01) | | | | | | | | | | | | | | | | 0 | | | | | | | | |
|---------------|------|-----|----|-----|----|-----|----|----|-----|----|-----|----|-----|----|----|-----|----|----|----|----|----|----|----|----|
| 反 射 率 | 天井 | 80 | | | | 70 | | | | 50 | | | | 30 | | | | | | | | | | |
| | 壁 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 30 | 10 | 0 | | | | | | | | |
| | 床 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 0 | | | | | | | | |
| 室 指 数 | 0.4 | 42 | 39 | 29 | 28 | 21 | 21 | 16 | 40 | 38 | 28 | 27 | 21 | 20 | 16 | 26 | 20 | 20 | 16 | 19 | 19 | 15 | 13 | |
| | 0.6 | 57 | 53 | 43 | 41 | 34 | 33 | 28 | 55 | 51 | 42 | 40 | 33 | 33 | 27 | 39 | 38 | 32 | 31 | 27 | 31 | 30 | 26 | 23 |
| | 0.8 | 67 | 61 | 52 | 49 | 42 | 41 | 35 | 64 | 59 | 51 | 48 | 42 | 40 | 34 | 48 | 45 | 40 | 39 | 33 | 38 | 37 | 32 | 29 |
| | 1 | 75 | 68 | 61 | 56 | 51 | 48 | 42 | 72 | 65 | 59 | 55 | 49 | 47 | 41 | 55 | 52 | 47 | 45 | 40 | 45 | 44 | 39 | 36 |
| | 1.25 | 83 | 74 | 69 | 63 | 59 | 56 | 50 | 79 | 71 | 67 | 62 | 58 | 55 | 49 | 63 | 59 | 55 | 53 | 47 | 52 | 51 | 46 | 43 |
| | 1.5 | 88 | 78 | 75 | 68 | 65 | 60 | 54 | 84 | 75 | 72 | 66 | 63 | 59 | 54 | 67 | 63 | 60 | 57 | 52 | 57 | 55 | 50 | 47 |
| | 2 | 96 | 83 | 84 | 75 | 75 | 68 | 62 | 91 | 81 | 81 | 73 | 72 | 67 | 61 | 75 | 70 | 68 | 64 | 60 | 64 | 62 | 58 | 54 |
| | 2.5 | 101 | 87 | 91 | 80 | 82 | 74 | 69 | 96 | 85 | 87 | 78 | 79 | 72 | 68 | 80 | 74 | 74 | 70 | 65 | 70 | 67 | 63 | 59 |
| | 3 | 104 | 90 | 95 | 83 | 87 | 78 | 73 | 100 | 87 | 91 | 81 | 84 | 76 | 72 | 84 | 77 | 78 | 73 | 69 | 73 | 70 | 67 | 62 |
| | 4 | 109 | 93 | 101 | 88 | 94 | 83 | 79 | 104 | 90 | 97 | 86 | 91 | 81 | 77 | 89 | 82 | 84 | 78 | 75 | 79 | 75 | 72 | 67 |
| | 5 | 112 | 95 | 105 | 91 | 99 | 87 | 83 | 107 | 92 | 101 | 88 | 96 | 85 | 81 | 93 | 84 | 88 | 81 | 78 | 82 | 78 | 76 | 71 |
| | 7 | 116 | 97 | 111 | 94 | 106 | 91 | 88 | 110 | 95 | 106 | 92 | 101 | 89 | 86 | 97 | 88 | 93 | 85 | 83 | 86 | 82 | 80 | 75 |
| | 10 | 119 | 99 | 115 | 97 | 111 | 94 | 92 | 113 | 97 | 109 | 95 | 106 | 92 | 90 | 100 | 90 | 98 | 89 | 87 | 90 | 85 | 84 | 78 |

配光曲線

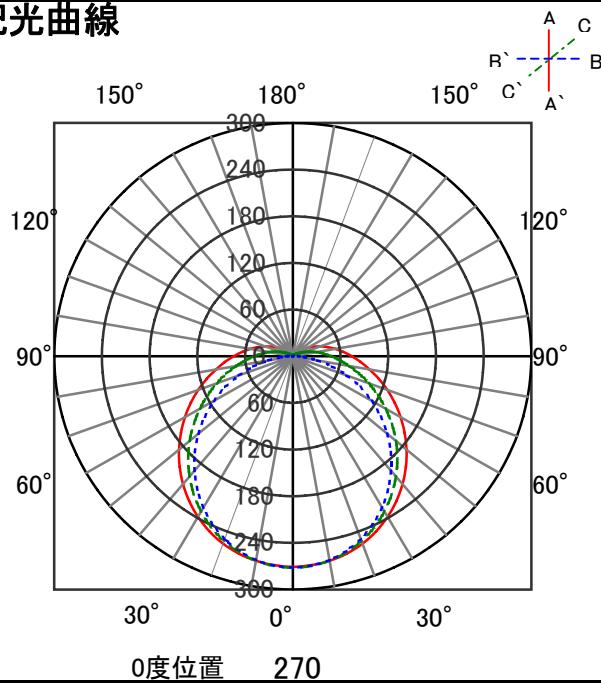


直射水平面照度

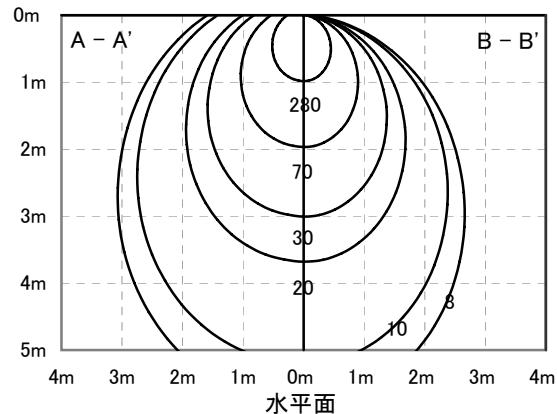

ECOHiLUX照明器具 配光データシート

| | | | |
|------|------------------------|------|------|
| 器具品名 | 直管形LEDランプ 専用器具 トラフ型 | 保守率 | |
| 器具品番 | IRLDL21TR | 良 | 0.81 |
| 部品品名 | - | 中 | 0.77 |
| 部品品番 | - | 否 | 0.67 |
| 器具効率 | | 器具効率 | |
| 器具光束 | 920lm | 上方向 | 8% |
| 光源 | LDFL1000NS | 下方向 | 84% |
| 光源光束 | 1000lm | 全方向 | 92% |


意匠図

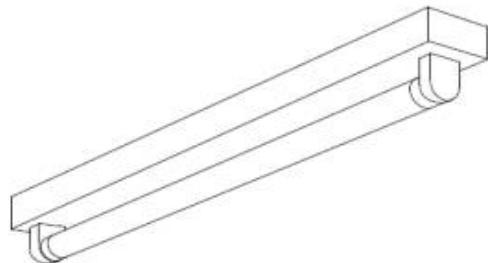


照明率表

| 作業面照明率(×0.01) | | | | | | | | | | | | | | | | | 30 | | 0 | | | | | |
|---------------|------|-----|----|-----|----|-----|----|----|-----|----|-----|----|-----|----|----|-----|----|----|----|----|----|----|----|----|
| 反 射 率 | 天井 | 80 | | | | | | 70 | | | | | | 50 | | | | | | 10 | | | | |
| | 壁 | 70 | | 50 | | 30 | | 10 | | 70 | | 50 | | 30 | | 10 | | 50 | | 0 | | | | |
| | 床 | 30 | 10 | 30 | 10 | 30 | 10 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 10 | 30 | 10 | 30 | 10 | 0 | | | | |
| 室 指 数 | 0.4 | 42 | 39 | 29 | 28 | 21 | 21 | 16 | 40 | 38 | 28 | 27 | 21 | 20 | 16 | 26 | 26 | 20 | 20 | 16 | 19 | 19 | 15 | 13 |
| | 0.6 | 57 | 53 | 43 | 41 | 34 | 33 | 28 | 55 | 51 | 42 | 40 | 33 | 33 | 27 | 39 | 38 | 32 | 31 | 27 | 31 | 30 | 26 | 23 |
| | 0.8 | 67 | 61 | 52 | 49 | 42 | 41 | 35 | 64 | 59 | 51 | 48 | 42 | 40 | 34 | 48 | 45 | 40 | 39 | 33 | 38 | 37 | 32 | 29 |
| | 1 | 75 | 68 | 61 | 56 | 51 | 48 | 42 | 72 | 65 | 59 | 55 | 49 | 47 | 41 | 55 | 52 | 47 | 45 | 40 | 45 | 44 | 39 | 36 |
| | 1.25 | 83 | 74 | 69 | 63 | 59 | 56 | 50 | 79 | 71 | 67 | 62 | 58 | 55 | 49 | 63 | 59 | 55 | 53 | 47 | 52 | 51 | 46 | 43 |
| | 1.5 | 88 | 78 | 75 | 68 | 65 | 60 | 54 | 84 | 75 | 72 | 66 | 63 | 59 | 54 | 67 | 63 | 60 | 57 | 52 | 57 | 55 | 50 | 47 |
| | 2 | 96 | 83 | 84 | 75 | 75 | 68 | 62 | 91 | 81 | 81 | 73 | 72 | 67 | 61 | 75 | 70 | 68 | 64 | 60 | 64 | 62 | 58 | 54 |
| | 2.5 | 101 | 87 | 91 | 80 | 82 | 74 | 69 | 96 | 85 | 87 | 78 | 79 | 72 | 68 | 80 | 74 | 74 | 70 | 65 | 70 | 67 | 63 | 59 |
| | 3 | 104 | 90 | 95 | 83 | 87 | 78 | 73 | 100 | 87 | 91 | 81 | 84 | 76 | 72 | 84 | 77 | 78 | 73 | 69 | 73 | 70 | 67 | 62 |
| | 4 | 109 | 93 | 101 | 88 | 94 | 83 | 79 | 104 | 90 | 97 | 86 | 91 | 81 | 77 | 89 | 82 | 84 | 78 | 75 | 79 | 75 | 72 | 67 |
| | 5 | 112 | 95 | 105 | 91 | 99 | 87 | 83 | 107 | 92 | 101 | 88 | 96 | 85 | 81 | 93 | 84 | 88 | 81 | 78 | 82 | 78 | 76 | 71 |
| | 7 | 116 | 97 | 111 | 94 | 106 | 91 | 88 | 110 | 95 | 106 | 92 | 101 | 89 | 86 | 97 | 88 | 93 | 85 | 83 | 86 | 82 | 80 | 75 |
| | 10 | 119 | 99 | 115 | 97 | 111 | 94 | 92 | 113 | 97 | 109 | 95 | 106 | 92 | 90 | 100 | 90 | 98 | 89 | 87 | 90 | 85 | 84 | 78 |

配光曲線

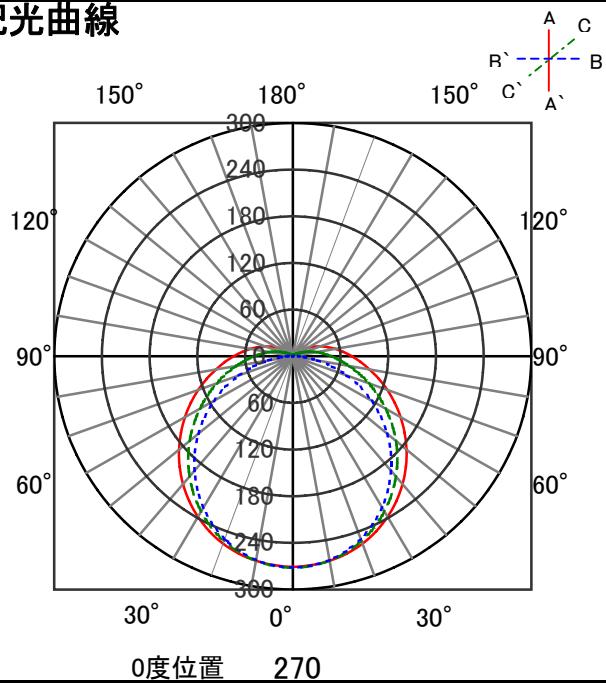


直射水平面照度

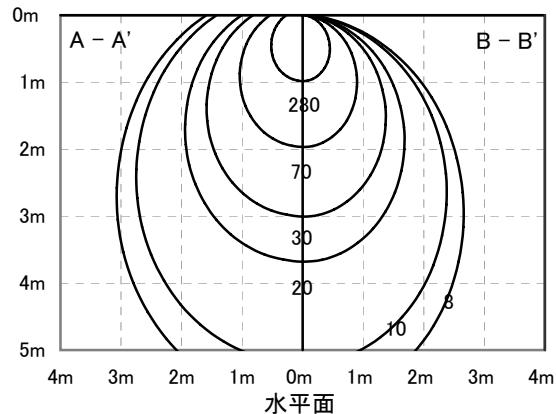

ECOHiLUX照明器具 配光データシート

| 器具品名 | 直管形LEDランプ 専用器具 トラフ型 | 保守率 | |
|------|------------------------|-----|---------|
| | | 良 | 0.81 |
| 器具品番 | IRLDL21TR | | 0.77 |
| | - | | 0.67 |
| 部品品名 | - | | 器具効率 |
| | - | | |
| 器具光束 | 920lm | | 上方向 8% |
| | 光源 LDPL1000WWF-H35 | | 下方向 84% |
| 光源光束 | 1000lm | | 全方向 92% |


意匠図

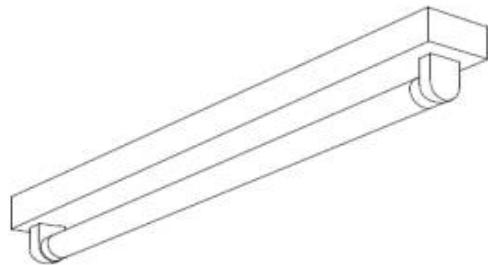


照明率表

| 作業面照明率(×0.01) | | | | | | | | | | | | | | | | | |
|---------------|------|-----|-----|-----|----|-----|----|-----|-----|-----|-----|----|-----|----|----|-----|----|
| 反 射 率 | 天井 | 80 | | | | 70 | | | | 50 | | | | 30 | | | |
| | 壁 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 0 |
| | 床 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 |
| 室 指 数 | 0.4 | 42 | 39 | 29 | 28 | 21 | 21 | 16 | 40 | 38 | 28 | 27 | 21 | 20 | 16 | 26 | 20 |
| | 0.6 | 57 | 53 | 43 | 41 | 34 | 33 | 28 | 55 | 51 | 42 | 40 | 33 | 33 | 27 | 39 | 38 |
| | 0.8 | 67 | 61 | 52 | 49 | 42 | 41 | 35 | 64 | 59 | 51 | 48 | 42 | 40 | 34 | 48 | 45 |
| | 1 | 75 | 68 | 61 | 56 | 51 | 48 | 42 | 72 | 65 | 59 | 55 | 49 | 47 | 41 | 55 | 52 |
| | 1.25 | 83 | 74 | 69 | 63 | 59 | 56 | 50 | 79 | 71 | 67 | 62 | 58 | 55 | 49 | 63 | 59 |
| | 1.5 | 88 | 78 | 75 | 68 | 65 | 60 | 54 | 84 | 75 | 72 | 66 | 63 | 59 | 54 | 67 | 63 |
| | 2 | 96 | 83 | 84 | 75 | 75 | 68 | 62 | 91 | 81 | 81 | 73 | 72 | 67 | 61 | 75 | 70 |
| | 2.5 | 101 | 87 | 91 | 80 | 82 | 74 | 69 | 96 | 85 | 87 | 78 | 79 | 72 | 68 | 80 | 74 |
| | 3 | 104 | 90 | 95 | 83 | 87 | 78 | 73 | 100 | 87 | 91 | 81 | 84 | 76 | 72 | 84 | 77 |
| | 4 | 109 | 93 | 101 | 88 | 94 | 83 | 79 | 104 | 90 | 97 | 86 | 91 | 81 | 77 | 89 | 82 |
| 5 | 112 | 95 | 105 | 91 | 99 | 87 | 83 | 107 | 92 | 101 | 88 | 96 | 85 | 81 | 93 | 84 | 88 |
| | 7 | 116 | 97 | 111 | 94 | 106 | 91 | 88 | 110 | 95 | 106 | 92 | 101 | 89 | 86 | 97 | 88 |
| | 10 | 119 | 99 | 115 | 97 | 111 | 94 | 92 | 113 | 97 | 109 | 95 | 106 | 92 | 90 | 100 | 90 |

配光曲線

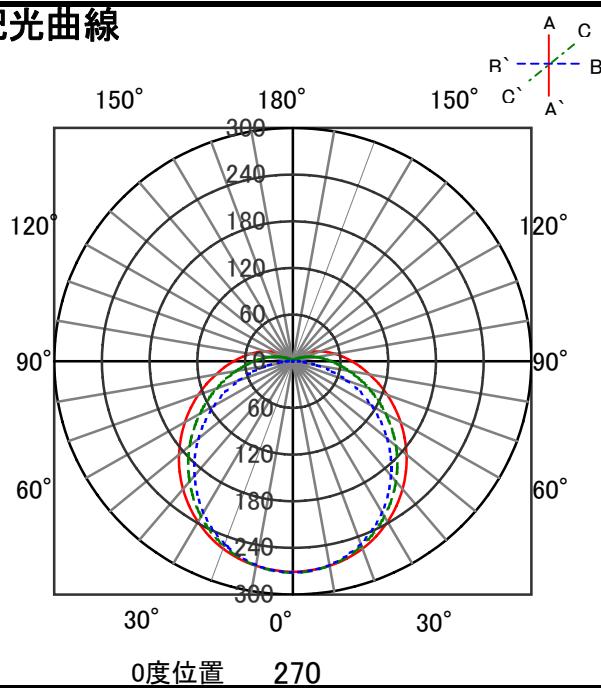


直射水平面照度

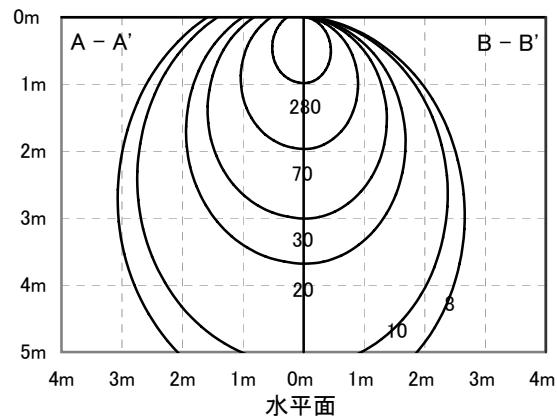

ECOHiLUX照明器具 配光データシート

| 器具品名 | 直管形LEDランプ 専用器具 トラフ型 | 保守率 | |
|------|------------------------|------|------|
| | | 良 | 0.81 |
| 器具品番 | IRLDL21TR | | 0.77 |
| | 否 | 0.67 | |
| 部品品名 | - | | 器具効率 |
| | 上方向 | 8% | |
| 部品品番 | - | | 下方向 |
| | 84% | | |
| 器具光束 | 920lm | | 全方向 |
| | 92% | | |
| 光源 | LDL1000WF-H40 | | |
| 光源光束 | 1000lm | | |


意匠図

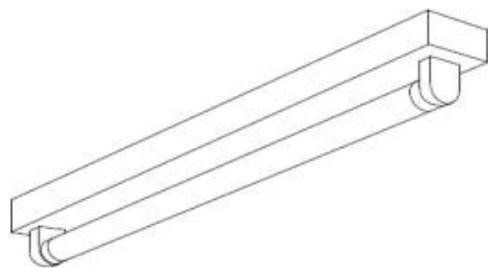


照明率表

| 作業面照明率(×0.01) | | | | | | | | | | | | | | | | 0 | | | | | | | | |
|---------------|------|-----|----|-----|----|-----|----|----|-----|----|-----|----|-----|----|----|-----|----|----|----|----|----|----|----|----|
| 反 射 率 | 天井 | 80 | | | | 70 | | | | 50 | | | | 30 | | | | | | | | | | |
| | 壁 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 30 | 10 | 0 | | | | | | | | |
| | 床 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 0 | | | | | | | | |
| 室 指 数 | 0.4 | 42 | 39 | 29 | 28 | 21 | 21 | 16 | 40 | 38 | 28 | 27 | 21 | 20 | 16 | 19 | 19 | 15 | 13 | | | | | |
| | 0.6 | 57 | 53 | 43 | 41 | 34 | 33 | 28 | 55 | 51 | 42 | 40 | 33 | 33 | 27 | 39 | 38 | 32 | 31 | 27 | 31 | 30 | 26 | 23 |
| | 0.8 | 67 | 61 | 52 | 49 | 42 | 41 | 35 | 64 | 59 | 51 | 48 | 42 | 40 | 34 | 48 | 45 | 40 | 39 | 33 | 38 | 37 | 32 | 29 |
| | 1 | 75 | 68 | 61 | 56 | 51 | 48 | 42 | 72 | 65 | 59 | 55 | 49 | 47 | 41 | 55 | 52 | 47 | 45 | 40 | 45 | 44 | 39 | 36 |
| | 1.25 | 83 | 74 | 69 | 63 | 59 | 56 | 50 | 79 | 71 | 67 | 62 | 58 | 55 | 49 | 63 | 59 | 55 | 53 | 47 | 52 | 51 | 46 | 43 |
| | 1.5 | 88 | 78 | 75 | 68 | 65 | 60 | 54 | 84 | 75 | 72 | 66 | 63 | 59 | 54 | 67 | 63 | 60 | 57 | 52 | 57 | 55 | 50 | 47 |
| | 2 | 96 | 83 | 84 | 75 | 75 | 68 | 62 | 91 | 81 | 81 | 73 | 72 | 67 | 61 | 75 | 70 | 68 | 64 | 60 | 64 | 62 | 58 | 54 |
| | 2.5 | 101 | 87 | 91 | 80 | 82 | 74 | 69 | 96 | 85 | 87 | 78 | 79 | 72 | 68 | 80 | 74 | 74 | 70 | 65 | 70 | 67 | 63 | 59 |
| | 3 | 104 | 90 | 95 | 83 | 87 | 78 | 73 | 100 | 87 | 91 | 81 | 84 | 76 | 72 | 84 | 77 | 78 | 73 | 69 | 73 | 70 | 67 | 62 |
| | 4 | 109 | 93 | 101 | 88 | 94 | 83 | 79 | 104 | 90 | 97 | 86 | 91 | 81 | 77 | 89 | 82 | 84 | 78 | 75 | 79 | 75 | 72 | 67 |
| | 5 | 112 | 95 | 105 | 91 | 99 | 87 | 83 | 107 | 92 | 101 | 88 | 96 | 85 | 81 | 93 | 84 | 88 | 81 | 78 | 82 | 78 | 76 | 71 |
| | 7 | 116 | 97 | 111 | 94 | 106 | 91 | 88 | 110 | 95 | 106 | 92 | 101 | 89 | 86 | 97 | 88 | 93 | 85 | 83 | 86 | 82 | 80 | 75 |
| | 10 | 119 | 99 | 115 | 97 | 111 | 94 | 92 | 113 | 97 | 109 | 95 | 106 | 92 | 90 | 100 | 90 | 98 | 89 | 87 | 90 | 85 | 84 | 78 |

配光曲線

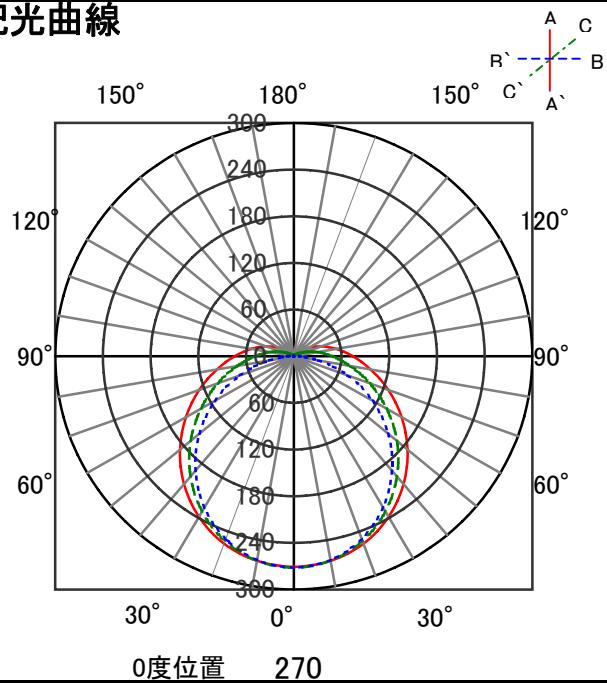


直射水平面照度

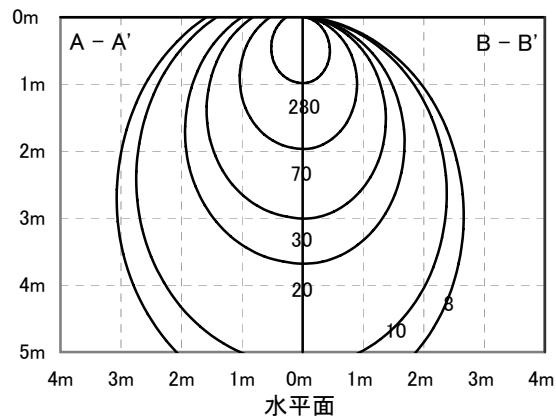

ECOHiLUX照明器具 配光データシート

| 器具品名 | 直管形LEDランプ 専用器具 トラフ型 | 保守率 | |
|------|------------------------|-----|---------|
| | | 良 | 0.81 |
| 器具品番 | IRLDL21TR | | 0.77 |
| | - | | 0.67 |
| 部品品名 | - | | 器具効率 |
| | - | | |
| 器具光束 | 920lm | | 上方向 8% |
| | 光源 LDPL1000NF-H50 | | 下方向 84% |
| 光源光束 | 1000lm | | 全方向 92% |


意匠図

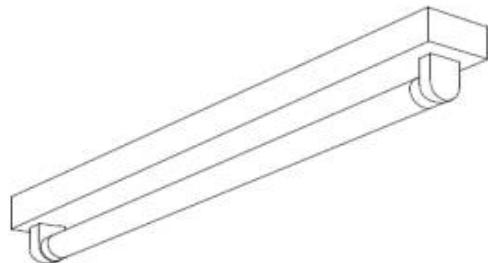


照明率表

| 反 射 率 | 天井 | 作業面照明率(×0.01) | | | | | | | | | | | | 0 | |
|-------------|------|---------------|-----|----|-----|----|----|-----|-----|-----|----|-----|----|----|-----|
| | | 80 | | | 70 | | | 50 | | | 30 | | | | |
| | | 壁 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 50 | 30 | 10 | 10 | |
| 室 指 数 | 床 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 10 | 0 |
| | 0.4 | 42 | 39 | 29 | 28 | 21 | 21 | 16 | 40 | 38 | 28 | 27 | 21 | 20 | 16 |
| | 0.6 | 57 | 53 | 43 | 41 | 34 | 33 | 28 | 55 | 51 | 42 | 40 | 33 | 27 | 39 |
| | 0.8 | 67 | 61 | 52 | 49 | 42 | 41 | 35 | 64 | 59 | 51 | 48 | 42 | 40 | 34 |
| | 1 | 75 | 68 | 61 | 56 | 51 | 48 | 42 | 72 | 65 | 59 | 55 | 49 | 47 | 41 |
| | 1.25 | 83 | 74 | 69 | 63 | 59 | 56 | 50 | 79 | 71 | 67 | 62 | 58 | 55 | 49 |
| | 1.5 | 88 | 78 | 75 | 68 | 65 | 60 | 54 | 84 | 75 | 72 | 66 | 63 | 59 | 55 |
| | 2 | 96 | 83 | 84 | 75 | 75 | 68 | 62 | 91 | 81 | 81 | 73 | 72 | 67 | 61 |
| | 2.5 | 101 | 87 | 91 | 80 | 82 | 74 | 69 | 96 | 85 | 87 | 78 | 79 | 72 | 68 |
| | 3 | 104 | 90 | 95 | 83 | 87 | 78 | 73 | 100 | 87 | 91 | 81 | 84 | 76 | 72 |
| 5 | 109 | 93 | 101 | 88 | 94 | 83 | 79 | 104 | 90 | 97 | 86 | 91 | 81 | 77 | 89 |
| 7 | 116 | 97 | 111 | 94 | 106 | 91 | 88 | 110 | 95 | 106 | 92 | 101 | 89 | 86 | 97 |
| 10 | 119 | 99 | 115 | 97 | 111 | 94 | 92 | 113 | 97 | 109 | 95 | 106 | 92 | 90 | 100 |

配光曲線

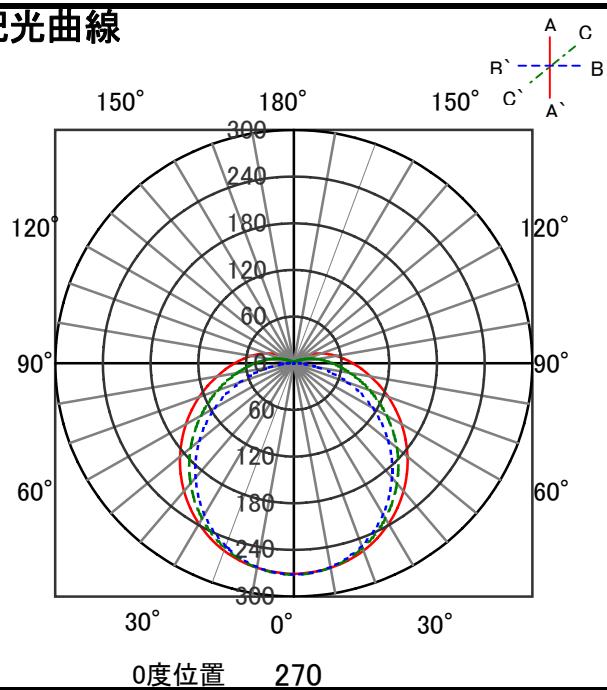


直射水平面照度

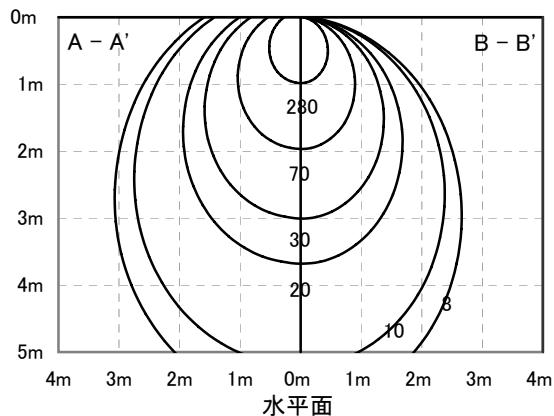

ECOHiLUX照明器具 配光データシート

| | | | |
|------|------------------------|------|------|
| 器具品名 | 直管形LEDランプ 専用器具 トラフ型 | 保守率 | |
| 器具品番 | IRLDL21TR | 良 | 0.81 |
| 部品品名 | - | 中 | 0.77 |
| 部品品番 | - | 否 | 0.67 |
| 器具効率 | | 器具効率 | |
| 器具光束 | 920lm | 上方向 | 8% |
| 光源 | LDFL1000DF-H65 | 下方向 | 84% |
| 光源光束 | 1000lm | 全方向 | 92% |


意匠図

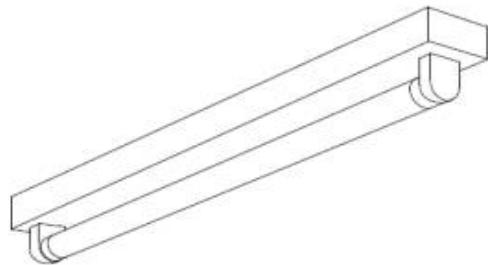


照明率表

| 作業面照明率(×0.01) | | | | | | | | | | | | | | | | 0 | | | | | | | | |
|---------------|------|-----|----|-----|----|-----|----|----|-----|----|-----|----|-----|----|----|-----|----|----|----|----|----|----|----|----|
| 反 射 率 | 天井 | 80 | | | | 70 | | | | 50 | | | | 30 | | | | | | | | | | |
| | 壁 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 50 | 30 | 10 | 30 | 10 | 10 | 30 | | | | | | | | |
| | 床 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 10 | | | | | | | | |
| 室 指 数 | 0.4 | 42 | 39 | 29 | 28 | 21 | 21 | 16 | 40 | 38 | 28 | 27 | 21 | 20 | 16 | 26 | 20 | 20 | 16 | 19 | 19 | 15 | 13 | |
| | 0.6 | 57 | 53 | 43 | 41 | 34 | 33 | 28 | 55 | 51 | 42 | 40 | 33 | 33 | 27 | 39 | 38 | 32 | 31 | 27 | 31 | 30 | 26 | 23 |
| | 0.8 | 67 | 61 | 52 | 49 | 42 | 41 | 35 | 64 | 59 | 51 | 48 | 42 | 40 | 34 | 48 | 45 | 40 | 39 | 33 | 38 | 37 | 32 | 29 |
| | 1 | 75 | 68 | 61 | 56 | 51 | 48 | 42 | 72 | 65 | 59 | 55 | 49 | 47 | 41 | 55 | 52 | 47 | 45 | 40 | 45 | 44 | 39 | 36 |
| | 1.25 | 83 | 74 | 69 | 63 | 59 | 56 | 50 | 79 | 71 | 67 | 62 | 58 | 55 | 49 | 63 | 59 | 55 | 53 | 47 | 52 | 51 | 46 | 43 |
| | 1.5 | 88 | 78 | 75 | 68 | 65 | 60 | 54 | 84 | 75 | 72 | 66 | 63 | 59 | 54 | 67 | 63 | 60 | 57 | 52 | 57 | 55 | 50 | 47 |
| | 2 | 96 | 83 | 84 | 75 | 75 | 68 | 62 | 91 | 81 | 81 | 73 | 72 | 67 | 61 | 75 | 70 | 68 | 64 | 60 | 64 | 62 | 58 | 54 |
| | 2.5 | 101 | 87 | 91 | 80 | 82 | 74 | 69 | 96 | 85 | 87 | 78 | 79 | 72 | 68 | 80 | 74 | 74 | 70 | 65 | 70 | 67 | 63 | 59 |
| | 3 | 104 | 90 | 95 | 83 | 87 | 78 | 73 | 100 | 87 | 91 | 81 | 84 | 76 | 72 | 84 | 77 | 78 | 73 | 69 | 73 | 70 | 67 | 62 |
| | 4 | 109 | 93 | 101 | 88 | 94 | 83 | 79 | 104 | 90 | 97 | 86 | 91 | 81 | 77 | 89 | 82 | 84 | 78 | 75 | 79 | 75 | 72 | 67 |
| | 5 | 112 | 95 | 105 | 91 | 99 | 87 | 83 | 107 | 92 | 101 | 88 | 96 | 85 | 81 | 93 | 84 | 88 | 81 | 78 | 82 | 78 | 76 | 71 |
| | 7 | 116 | 97 | 111 | 94 | 106 | 91 | 88 | 110 | 95 | 106 | 92 | 101 | 89 | 86 | 97 | 88 | 93 | 85 | 83 | 86 | 82 | 80 | 75 |
| | 10 | 119 | 99 | 115 | 97 | 111 | 94 | 92 | 113 | 97 | 109 | 95 | 106 | 92 | 90 | 100 | 90 | 98 | 89 | 87 | 90 | 85 | 84 | 78 |

配光曲線

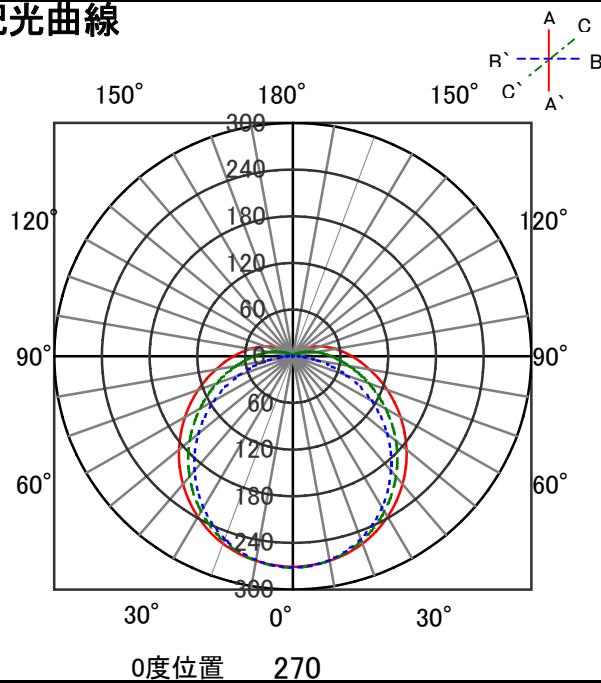


直射水平面照度

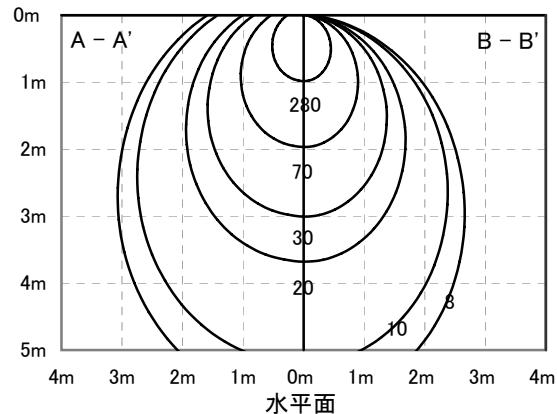

ECOHiLUX照明器具 配光データシート

| | | | |
|------|------------------------|------|------|
| 器具品名 | 直管形LEDランプ 専用器具 トラフ型 | 保守率 | |
| 器具品番 | IRLDL21TR | 良 | 0.81 |
| 部品品名 | - | 中 | 0.77 |
| 部品品番 | - | 否 | 0.67 |
| 器具効率 | | 器具効率 | |
| 器具光束 | 920lm | 上方向 | 8% |
| 光源 | LDG20S-W/9/10 | 下方向 | 84% |
| 光源光束 | 1000lm | 全方向 | 92% |


意匠図

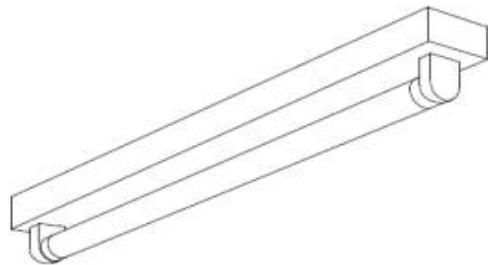


照明率表

| 作業面照明率(×0.01) | | | | | | | | | | | | | | | | 0 | | | | | | | | |
|---------------|------|-----|----|-----|----|-----|----|----|-----|----|-----|----|-----|----|----|-----|----|----|----|----|----|----|----|----|
| 反 射 率 | 天井 | 80 | | | | 70 | | | | 50 | | | | 30 | | | | | | | | | | |
| | 壁 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 50 | 30 | 10 | 30 | 10 | 10 | 30 | | | | | | | | |
| | 床 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 10 | | | | | | | | |
| 室 指 数 | 0.4 | 42 | 39 | 29 | 28 | 21 | 21 | 16 | 40 | 38 | 28 | 27 | 21 | 20 | 16 | 26 | 20 | 20 | 16 | 19 | 19 | 15 | 13 | |
| | 0.6 | 57 | 53 | 43 | 41 | 34 | 33 | 28 | 55 | 51 | 42 | 40 | 33 | 33 | 27 | 39 | 38 | 32 | 31 | 27 | 31 | 30 | 26 | 23 |
| | 0.8 | 67 | 61 | 52 | 49 | 42 | 41 | 35 | 64 | 59 | 51 | 48 | 42 | 40 | 34 | 48 | 45 | 40 | 39 | 33 | 38 | 37 | 32 | 29 |
| | 1 | 75 | 68 | 61 | 56 | 51 | 48 | 42 | 72 | 65 | 59 | 55 | 49 | 47 | 41 | 55 | 52 | 47 | 45 | 40 | 45 | 44 | 39 | 36 |
| | 1.25 | 83 | 74 | 69 | 63 | 59 | 56 | 50 | 79 | 71 | 67 | 62 | 58 | 55 | 49 | 63 | 59 | 55 | 53 | 47 | 52 | 51 | 46 | 43 |
| | 1.5 | 88 | 78 | 75 | 68 | 65 | 60 | 54 | 84 | 75 | 72 | 66 | 63 | 59 | 54 | 67 | 63 | 60 | 57 | 52 | 57 | 55 | 50 | 47 |
| | 2 | 96 | 83 | 84 | 75 | 75 | 68 | 62 | 91 | 81 | 81 | 73 | 72 | 67 | 61 | 75 | 70 | 68 | 64 | 60 | 64 | 62 | 58 | 54 |
| | 2.5 | 101 | 87 | 91 | 80 | 82 | 74 | 69 | 96 | 85 | 87 | 78 | 79 | 72 | 68 | 80 | 74 | 74 | 70 | 65 | 70 | 67 | 63 | 59 |
| | 3 | 104 | 90 | 95 | 83 | 87 | 78 | 73 | 100 | 87 | 91 | 81 | 84 | 76 | 72 | 84 | 77 | 78 | 73 | 69 | 73 | 70 | 67 | 62 |
| | 4 | 109 | 93 | 101 | 88 | 94 | 83 | 79 | 104 | 90 | 97 | 86 | 91 | 81 | 77 | 89 | 82 | 84 | 78 | 75 | 79 | 75 | 72 | 67 |
| | 5 | 112 | 95 | 105 | 91 | 99 | 87 | 83 | 107 | 92 | 101 | 88 | 96 | 85 | 81 | 93 | 84 | 88 | 81 | 78 | 82 | 78 | 76 | 71 |
| | 7 | 116 | 97 | 111 | 94 | 106 | 91 | 88 | 110 | 95 | 106 | 92 | 101 | 89 | 86 | 97 | 88 | 93 | 85 | 83 | 86 | 82 | 80 | 75 |
| | 10 | 119 | 99 | 115 | 97 | 111 | 94 | 92 | 113 | 97 | 109 | 95 | 106 | 92 | 90 | 100 | 90 | 98 | 89 | 87 | 90 | 85 | 84 | 78 |

配光曲線

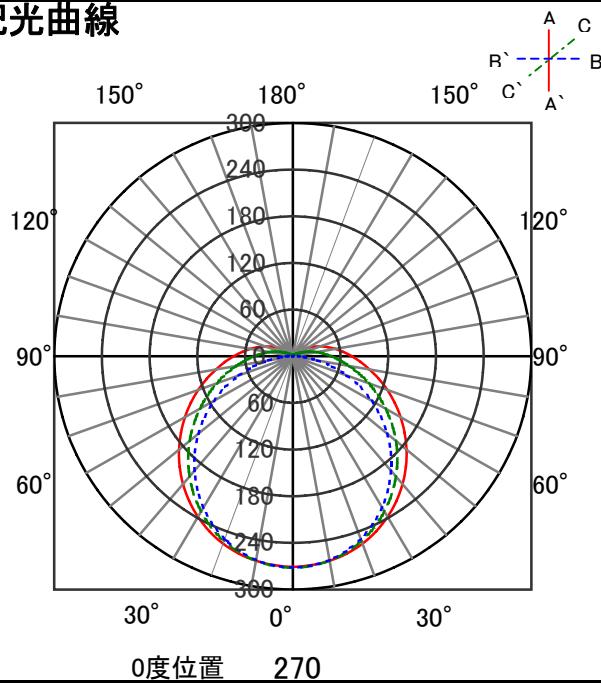


直射水平面照度

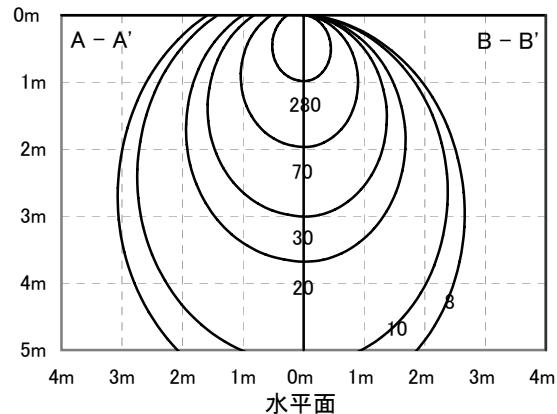

ECOHiLUX照明器具 配光データシート

| 器具品名 | 直管形LEDランプ 専用器具 トラフ型 | 保守率 | |
|------|------------------------|------|------|
| | | 良 | 0.81 |
| 器具品番 | IRLDL21TR | | 0.77 |
| | 否 | 0.67 | |
| 部品品名 | - | | 器具効率 |
| | 上方向 | 8% | |
| 部品品番 | - | | 下方向 |
| | 84% | | |
| 器具光束 | 920lm | | 全方向 |
| | 92% | | |
| 光源 | LDG20S-D/9/10 | | |
| 光源光束 | 1000lm | | |


意匠図

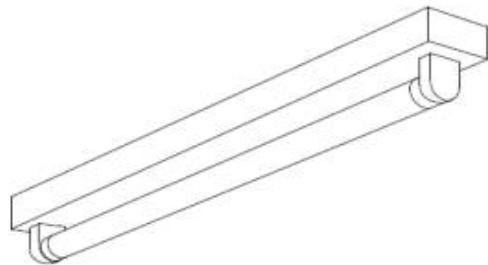

照明率表

| 作業面照明率(×0.01) | | | | | | | | | | | | | | | | 0 | | | | | | | | |
|---------------|------|-----|----|-----|----|-----|----|----|-----|----|-----|----|-----|----|----|-----|----|----|----|----|----|----|----|----|
| 反 射 率 | 天井 | 80 | | | | 70 | | | | 50 | | | | 30 | | | | | | | | | | |
| | 壁 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 30 | 10 | 0 | | | | | | | | |
| | 床 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 0 | | | | | | | | |
| 室 指 数 | 0.4 | 42 | 39 | 29 | 28 | 21 | 21 | 16 | 40 | 38 | 28 | 27 | 21 | 20 | 16 | 26 | 20 | 20 | 16 | 19 | 19 | 15 | 13 | |
| | 0.6 | 57 | 53 | 43 | 41 | 34 | 33 | 28 | 55 | 51 | 42 | 40 | 33 | 33 | 27 | 39 | 38 | 32 | 31 | 27 | 31 | 30 | 26 | 23 |
| | 0.8 | 67 | 61 | 52 | 49 | 42 | 41 | 35 | 64 | 59 | 51 | 48 | 42 | 40 | 34 | 48 | 45 | 40 | 39 | 33 | 38 | 37 | 32 | 29 |
| | 1 | 75 | 68 | 61 | 56 | 51 | 48 | 42 | 72 | 65 | 59 | 55 | 49 | 47 | 41 | 55 | 52 | 47 | 45 | 40 | 45 | 44 | 39 | 36 |
| | 1.25 | 83 | 74 | 69 | 63 | 59 | 56 | 50 | 79 | 71 | 67 | 62 | 58 | 55 | 49 | 63 | 59 | 55 | 53 | 47 | 52 | 51 | 46 | 43 |
| | 1.5 | 88 | 78 | 75 | 68 | 65 | 60 | 54 | 84 | 75 | 72 | 66 | 63 | 59 | 54 | 67 | 63 | 60 | 57 | 52 | 57 | 55 | 50 | 47 |
| | 2 | 96 | 83 | 84 | 75 | 75 | 68 | 62 | 91 | 81 | 81 | 73 | 72 | 67 | 61 | 75 | 70 | 68 | 64 | 60 | 64 | 62 | 58 | 54 |
| | 2.5 | 101 | 87 | 91 | 80 | 82 | 74 | 69 | 96 | 85 | 87 | 78 | 79 | 72 | 68 | 80 | 74 | 74 | 70 | 65 | 70 | 67 | 63 | 59 |
| | 3 | 104 | 90 | 95 | 83 | 87 | 78 | 73 | 100 | 87 | 91 | 81 | 84 | 76 | 72 | 84 | 77 | 78 | 73 | 69 | 73 | 70 | 67 | 62 |
| | 4 | 109 | 93 | 101 | 88 | 94 | 83 | 79 | 104 | 90 | 97 | 86 | 91 | 81 | 77 | 89 | 82 | 84 | 78 | 75 | 79 | 75 | 72 | 67 |
| | 5 | 112 | 95 | 105 | 91 | 99 | 87 | 83 | 107 | 92 | 101 | 88 | 96 | 85 | 81 | 93 | 84 | 88 | 81 | 78 | 82 | 78 | 76 | 71 |
| | 7 | 116 | 97 | 111 | 94 | 106 | 91 | 88 | 110 | 95 | 106 | 92 | 101 | 89 | 86 | 97 | 88 | 93 | 85 | 83 | 86 | 82 | 80 | 75 |
| | 10 | 119 | 99 | 115 | 97 | 111 | 94 | 92 | 113 | 97 | 109 | 95 | 106 | 92 | 90 | 100 | 90 | 98 | 89 | 87 | 90 | 85 | 84 | 78 |

配光曲線

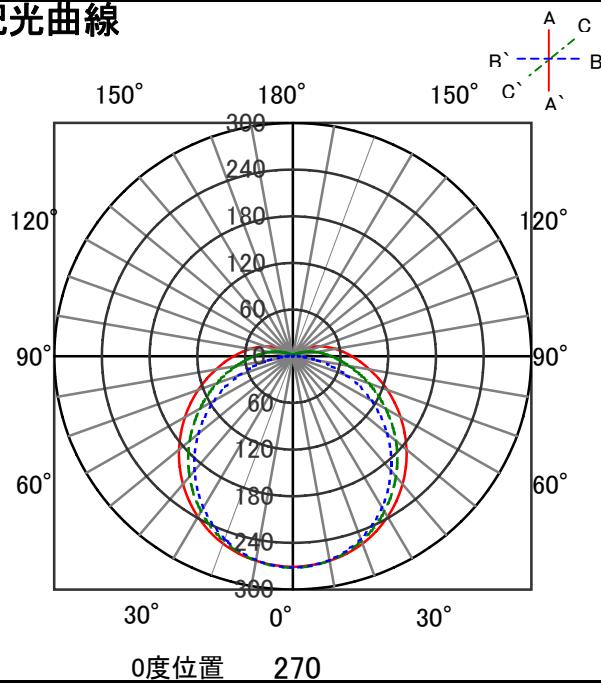

直射水平面照度

