


ECOHILUX照明器具 配光データシート

意匠図


器具品名	ダウンライト	保守率	
器具品番	DL15L30-80UCB-D	良	0.78
部品品名	-	中	0.74
部品品番	-	否	0.70
器具光束	1098lm	器具効率	
光源	-	上方向	0%
光源光束	一体型器具のため、器具光束表示	下方向	100%
		全方向	100%

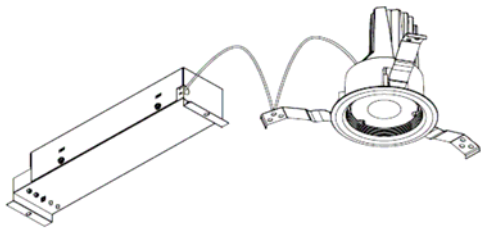

照明率表

作業面照明率(×0.01)																											
反 射 率	天井	80								70								50						30			0
	壁	70		50		30		10		70		50		30		10		50		30		10	30	10	0		
室 指 数	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	10	0			
	0.4	50	47	38	36	30	30	26	49	46	37	36	30	30	26	36	35	30	29	26	30	29	26	24			
	0.6	70	64	57	54	49	47	43	68	63	56	53	48	47	43	54	52	48	47	42	47	46	42	41			
	0.8	80	72	67	62	58	56	51	78	71	65	62	57	55	50	63	60	56	55	50	55	54	50	48			
	1	89	80	76	70	67	64	59	86	78	75	70	67	64	59	72	68	65	63	59	64	62	58	56			
	1.25	97	86	85	78	77	72	68	94	85	84	77	76	72	68	81	76	74	71	67	72	70	67	65			
	1.5	101	89	91	82	83	77	72	98	88	89	81	81	76	72	85	80	79	75	71	77	74	71	69			
	2	108	94	99	88	92	84	80	105	93	97	87	90	83	79	92	86	87	82	78	84	81	78	75			
	2.5	113	97	105	93	98	89	85	109	96	102	92	96	88	85	97	90	92	87	84	89	85	83	81			
	3	116	99	109	95	103	92	88	112	98	106	94	100	91	88	100	92	96	89	87	92	88	86	83			
	4	119	102	114	98	109	95	93	115	100	110	97	106	95	92	104	95	101	93	91	96	91	90	87			
	5	122	103	117	100	113	98	96	118	102	113	99	109	97	95	107	97	104	95	93	98	94	92	90			
7	124	105	121	103	117	101	99	120	103	117	101	114	100	98	110	99	107	98	97	101	96	95	92				
10	126	106	124	104	121	103	102	122	104	119	103	117	102	101	112	101	110	100	99	104	98	97	94				

配光曲線

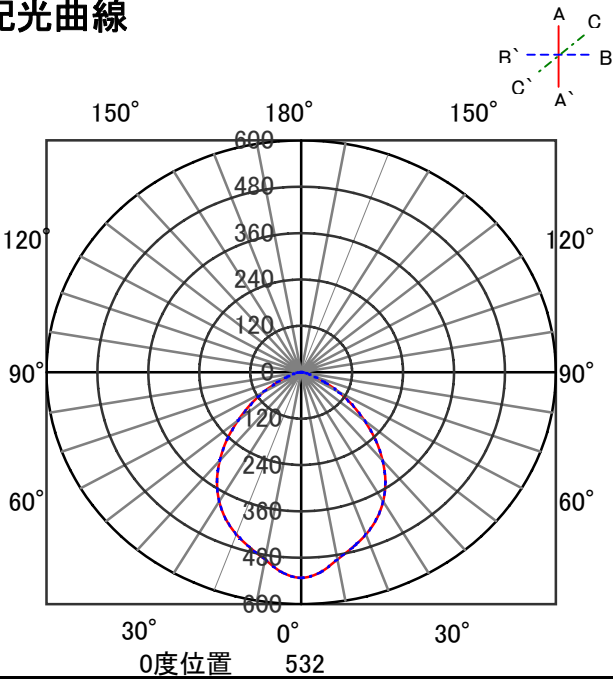

直射水平面照度

