

## ECOHiLUX照明器具 配光データシート

器具品名	直管形LEDランプ 低温用防塵・防湿型専用器具	保守率	
器具品番	IRLDFL42BCLV2	良	0.69
部品品名	-		0.65
部品品番	-		0.61
器具効率			
器具光束	2430lm	上方向	0%
光源	LDG40S-N/12/15	下方向	81%
光源光束	1500lm × 2	全方向	81%


## 意匠図




## 照明率表

作業面照明率(×0.01)																	
反射率	天井	80				70				50				30			
	壁	70	50	30	10	70	50	30	10	50	30	10	30	10	10	30	10
室 指 数	床	30	10	30	10	30	10	30	10	30	10	10	30	10	10	30	10
	0.4	38	35	26	25	20	19	15	37	34	26	25	19	19	15	19	18
	0.6	52	48	39	37	32	31	26	51	47	39	37	31	31	26	37	36
	0.8	61	55	48	45	40	38	33	59	54	47	44	39	33	45	43	38
	1	68	61	56	52	47	45	39	66	60	54	51	46	44	39	52	49
	1.25	75	67	64	58	55	52	47	73	65	62	57	54	51	46	59	56
	1.5	80	70	69	62	60	56	51	77	69	67	61	59	55	51	63	59
	2	86	75	77	68	69	63	58	83	74	74	67	67	62	58	70	65
	2.5	91	79	82	73	75	68	63	88	77	80	72	73	67	63	75	70
	3	94	81	86	75	80	71	67	90	79	83	74	78	70	66	79	72
	4	98	83	92	79	86	75	72	94	82	88	78	83	75	71	83	76
	5	101	85	95	82	90	78	75	97	84	92	80	87	77	75	86	82
	7	104	87	99	84	95	82	80	100	86	96	83	92	81	79	89	81
	10	106	89	103	87	100	85	83	102	87	99	85	96	84	82	92	83

## 配光曲線

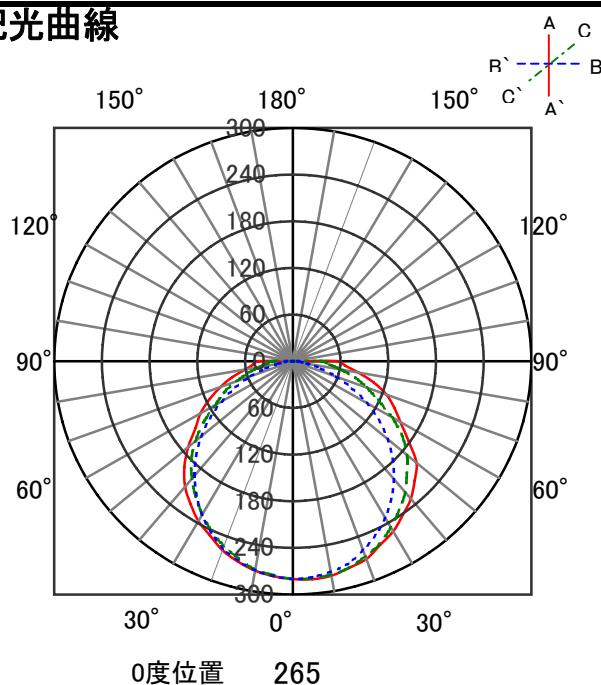


## 直射水平面照度

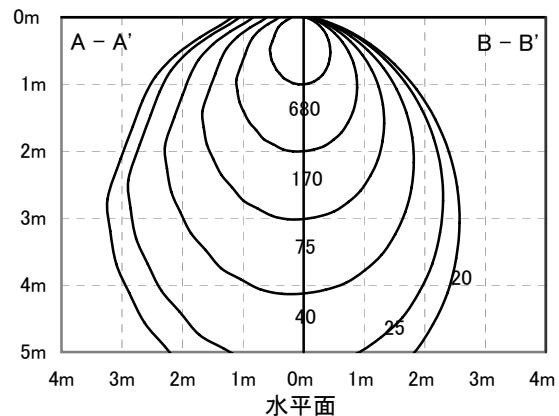

## ECOHiLUX照明器具 配光データシート

器具品名	直管形LEDランプ 低温用防塵・防湿型専用器具	保守率	
器具品番	IRLDFL42BCLV2	良	0.69
部品品名	-		0.65
部品品番	-		0.61
器具効率			
器具光束	3220lm	上方向	0%
光源	LDG40S-N/16/20	下方向	81%
光源光束	2000lm × 2	全方向	81%


## 意匠図

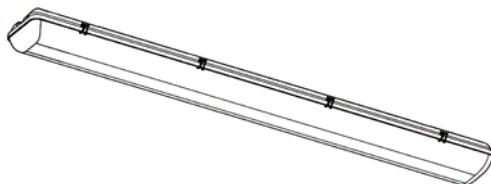


## 照明率表

作業面照明率(×0.01)																					
反射率	天井	80				70				50				30							
	壁	70	50	30	10	70	50	30	10	50	30	10	50	30	10	30	10				
	床	30	10	30	10	30	10	30	10	30	10	10	30	10	30	10	0				
室 指 数	0.4	38	35	26	25	20	19	15	37	34	26	25	19	19	15	19	18	15	14		
	0.6	52	48	39	37	32	31	26	51	47	39	37	31	31	26	37	36	31	30	26	24
	0.8	61	55	48	45	40	38	33	59	54	47	44	39	38	33	45	43	38	37	32	30
	1	68	61	56	52	47	45	39	66	60	54	51	46	44	39	52	49	45	43	39	37
	1.25	75	67	64	58	55	52	47	73	65	62	57	54	51	46	59	56	52	50	46	45
	1.5	80	70	69	62	60	56	51	77	69	67	61	59	55	51	63	59	57	54	50	55
	2	86	75	77	68	69	63	58	83	74	74	67	67	62	58	70	65	65	61	57	62
	2.5	91	79	82	73	75	68	63	88	77	80	72	73	67	63	75	70	70	66	62	67
	3	94	81	86	75	80	71	67	90	79	83	74	78	70	66	79	72	74	69	65	70
	4	98	83	92	79	86	75	72	94	82	88	78	83	75	71	83	76	79	73	70	75
	5	101	85	95	82	90	78	75	97	84	92	80	87	77	75	86	78	82	76	73	78
	7	104	87	99	84	95	82	80	100	86	96	83	92	81	79	89	81	87	79	77	82
	10	106	89	103	87	100	85	83	102	87	99	85	96	84	82	92	83	90	82	80	85

## 配光曲線

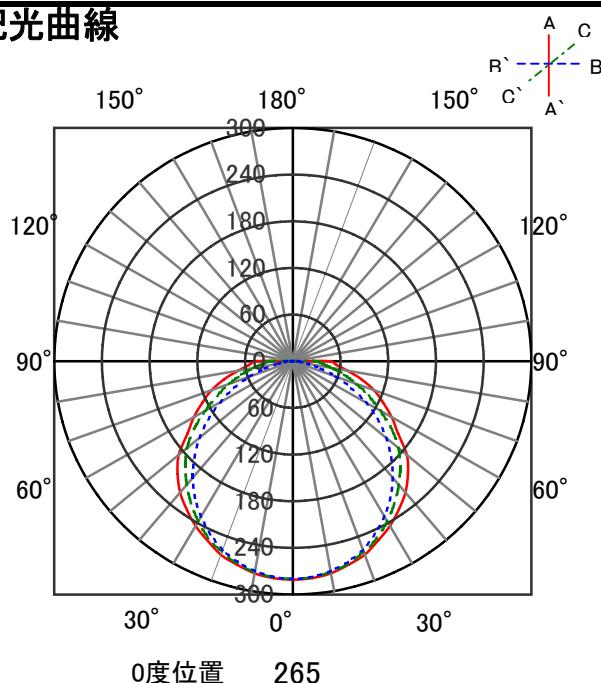


## 直射水平面照度

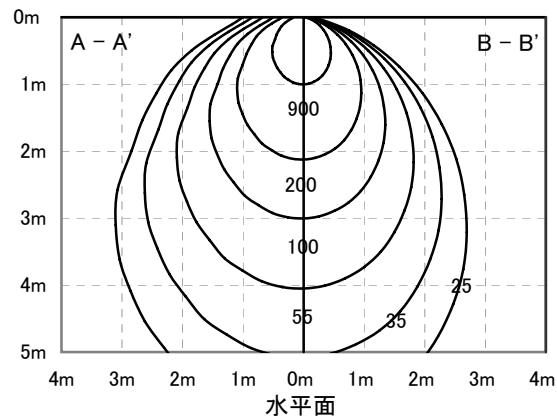

## ECOHiLUX照明器具 配光データシート

器具品名	直管形LEDランプ 低温用防塵・防湿型専用器具	保守率	
器具品番	IRLDFL42BCLV2	良	0.69
部品品名	-		0.65
部品品番	-		0.61
器具効率			
器具光束	3850lm	上方向	0%
光源	LDG40S-N/20/25	下方向	77%
光源光束	2500lm × 2	全方向	77%


## 意匠図

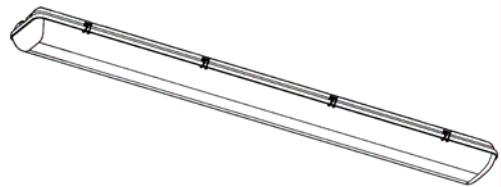

## 照明率表

作業面照明率(×0.01)																	
反射率	天井	80				70				50				30			
	壁	70	50	30	10	70	50	30	10	50	30	10	30	10	10	30	10
室 指 数	床	30	10	30	10	30	10	30	10	30	10	10	30	10	10	30	10
	0.4	38	35	26	25	20	19	15	37	34	26	25	19	19	15	25	19
	0.6	52	48	39	37	32	31	26	51	47	39	37	31	31	26	37	36
	0.8	61	55	48	45	40	38	33	59	54	47	44	39	33	45	43	38
	1	68	61	56	52	47	45	39	66	60	54	51	46	44	39	52	49
	1.25	75	67	64	58	55	52	47	73	65	62	57	54	51	46	59	56
	1.5	80	70	69	62	60	56	51	77	69	67	61	59	55	51	63	59
	2	86	75	77	68	69	63	58	83	74	74	67	67	62	58	70	65
	2.5	91	79	82	73	75	68	63	88	77	80	72	73	67	63	75	70
	3	94	81	86	75	80	71	67	90	79	83	74	78	70	66	79	72
	4	98	83	92	79	86	75	72	94	82	88	78	83	75	71	83	76
	5	101	85	95	82	90	78	75	97	84	92	80	87	77	75	86	82
	7	104	87	99	84	95	82	80	100	86	96	83	92	81	79	89	81
	10	106	89	103	87	100	85	83	102	87	99	85	96	84	82	92	83

## 配光曲線

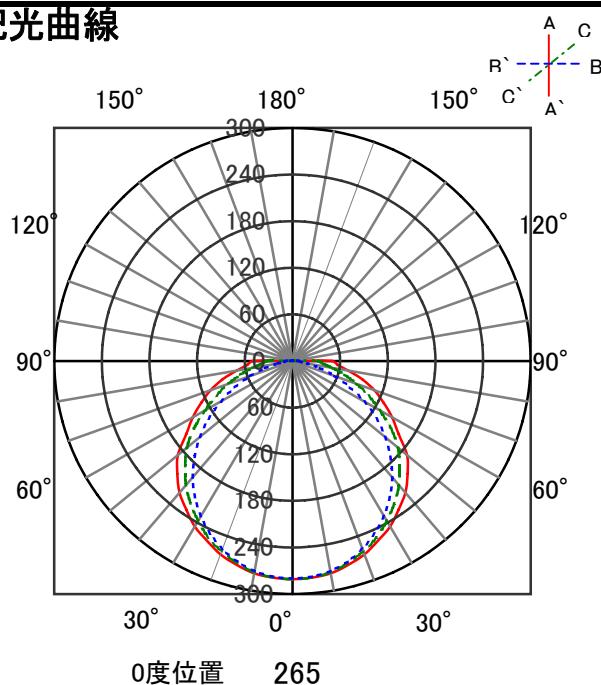

## 直射水平面照度

