


ECOHiLUX照明器具 配光データシート

意匠図

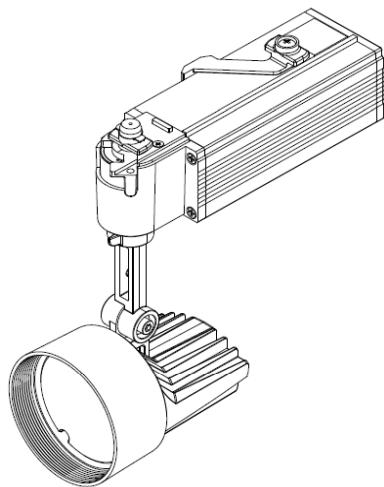


器具品名	スポットライト	保守率	
		良	0.78
器具品番	SP12L27-25MUW		中 0.74
	-		否 0.70
部品品名	-		器具効率
	-		
部品品番	-		上方向 0%
	-		下方向 100%
器具光束	1450lm		全方向 100%
	-		
光源	-		
光源光束	一体型器具のため、器具光束表示		

照明率表

反射率	天井	作業面照明率(×0.01)												0	
		80			70			50			30				
		壁	70	50	30	10	70	50	30	10	50	30	10	10	
室	壁	30	10	30	10	30	10	30	10	30	10	30	10	10	0
指	床	0.4	60	56	49	47	43	42	38	59	55	48	47	42	38
数		0.6	78	72	67	63	60	58	54	76	71	66	63	60	53
		0.8	88	80	77	73	70	67	64	86	79	76	72	70	62
		1	95	85	84	78	77	73	70	93	84	83	78	77	67
		1.25	101	90	91	84	84	79	76	98	88	90	83	79	73
		1.5	105	92	96	87	89	83	79	102	91	94	86	82	78
		2	110	96	102	92	96	88	85	107	95	100	91	87	84
		2.5	114	98	107	95	101	91	89	110	97	104	94	99	89
		3	116	100	110	97	105	94	91	113	99	107	96	103	92
		4	120	102	115	99	111	97	95	116	100	111	98	108	96
		5	122	103	118	101	114	99	98	118	102	114	100	111	97
		7	124	104	121	103	119	102	101	120	103	117	102	115	94
		10	126	105	124	105	122	104	103	121	104	120	103	118	96

配光曲線

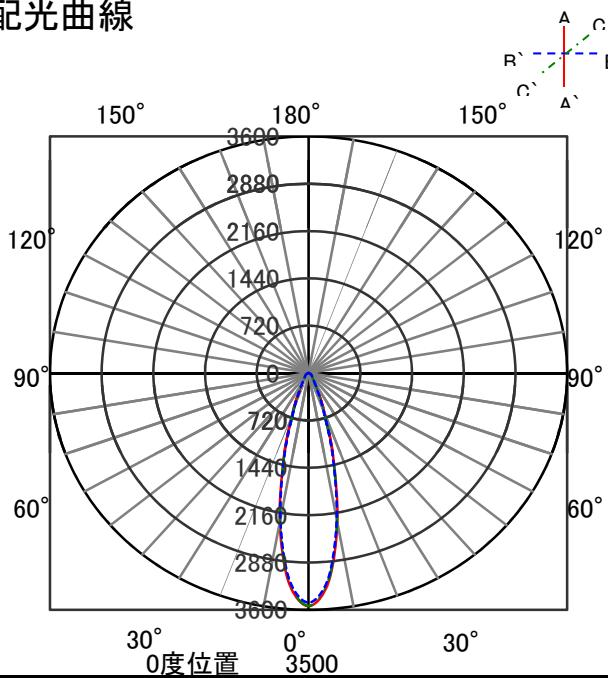

直射水平面照度

