


ECOHILUX照明器具 配光データシート

意匠図


器具品名	ダウンライト リニューアルタイプ	保守率	
器具品番	DL18N-50RP20-12W-D	良	0.78
部品品名	-	中	0.74
部品品番	-	否	0.70
器具光束	2280lm	器具効率	
光源	-	上方向	0%
光源光束	一体型器具のため、器具光束表示	下方向	100%
		全方向	100%

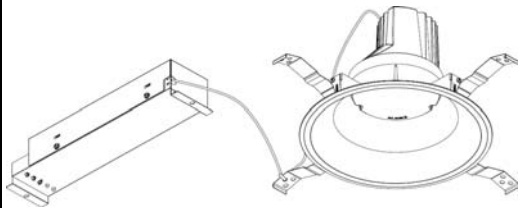

照明率表

作業面照明率(×0.01)																												
反 射 率	天井	80								70								50						30			0	
	壁 床	70		50		30		10		70		50		30		10		50		30		10		30		10		0
室 指 数	0.4	60	57	49	47	43	42	38	59	56	48	47	42	42	38	48	46	42	41	38	42	41	38	37				
	0.6	79	73	67	64	60	59	55	77	72	67	64	60	58	55	65	63	59	58	54	59	58	54	53				
	0.8	90	81	79	74	71	68	65	88	80	77	73	71	68	64	76	72	70	68	64	69	67	64	62				
	1	97	87	86	80	79	75	71	94	86	85	79	78	75	71	82	78	77	74	71	75	73	70	69				
	1.25	103	92	93	86	86	81	77	100	90	92	85	85	81	77	89	83	83	80	77	81	79	76	75				
	1.5	107	94	98	89	91	85	81	104	93	96	88	90	84	81	93	87	88	83	81	85	82	80	78				
	2	113	98	105	94	99	90	87	110	97	103	93	97	90	87	98	91	94	88	86	91	87	85	83				
	2.5	116	100	110	97	104	94	91	113	99	107	96	102	93	90	102	94	98	92	89	94	90	89	86				
	3	119	102	113	99	108	96	94	115	101	110	98	105	95	93	104	96	101	94	92	97	93	91	89				
	4	122	104	117	101	113	99	97	118	103	114	100	110	99	97	108	99	105	97	95	100	95	94	92				
	5	124	105	120	103	117	101	100	120	104	116	102	113	101	99	110	100	107	99	98	102	97	96	94				
	7	127	106	124	105	121	104	103	122	105	120	104	117	103	102	112	102	111	101	100	105	99	99	96				
10	128	107	126	106	124	106	105	124	106	122	105	120	105	104	114	103	113	103	102	107	101	100	98					

配光曲線

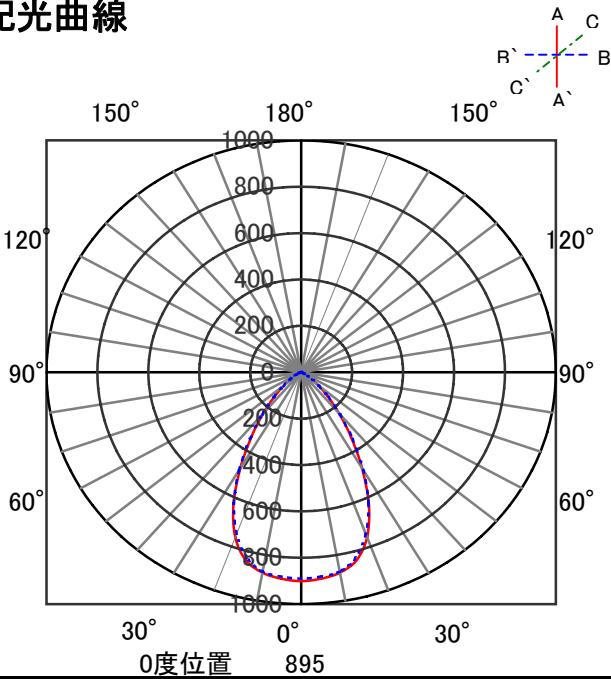

直射水平面照度

