


ECOHiLUX照明器具 配光データシート

意匠図


器具品名	ダウンライト リニューアルタイプ	保守率	
器具品番	DL18N-25RP17-12W-D	良	0.78
部品品名	-	中	0.74
部品品番	-	否	0.70
器具光束	2330lm	器具効率	
光源	-	上方向	0%
光源光束	一体型器具のため、器具光束表示	下方向	100%
		全方向	100%

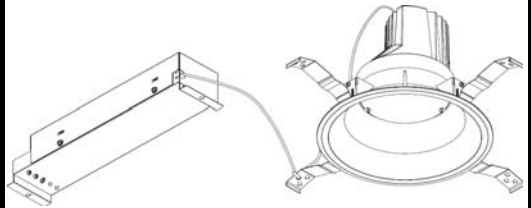

照明率表

反射率	天井	80								70								50								30								0							
		壁		70		50		30		10		70		50		30		10		50		30		10		30		10		0											
床		30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	10	30	10	10	30	10	10	0											
室 指 数	0.4	65	61	53	51	47	46	43	63	60	53	51	47	46	43	52	51	47	46	43	46	46	43	46	46	43	41														
	0.6	84	77	73	69	66	64	60	82	76	72	68	65	64	60	70	68	65	63	60	64	63	60	64	63	60	58														
	0.8	94	85	83	78	77	73	70	92	84	82	78	76	73	70	80	77	75	73	69	74	72	69	74	72	69	68														
	1	101	91	91	84	84	80	76	99	89	89	84	83	79	76	87	82	81	79	76	80	78	75	74																	
	1.25	107	95	98	89	91	85	82	104	94	96	89	84	83	85	93	87	88	84	81	86	83	81	79																	
	1.5	111	98	102	93	96	89	86	108	96	100	92	94	88	85	97	90	92	87	85	89	86	84	82																	
	2	116	101	108	97	102	94	91	113	100	106	96	101	93	90	102	94	97	92	90	94	91	89	87																	
	2.5	119	103	113	100	108	97	94	116	102	110	99	105	96	94	105	97	101	95	93	98	94	92	90																	
	3	122	104	116	102	111	99	97	118	103	113	101	109	98	96	107	99	104	97	95	100	96	94	92																	
	4	125	106	120	104	116	102	101	121	105	117	103	113	101	100	111	101	108	100	99	103	98	97	95																	
5	127	107	123	106	120	104	103	123	106	120	105	117	103	102	113	103	111	102	101	105	100	99	97																		
7	129	109	127	108	124	107	106	125	108	123	107	121	106	105	115	105	114	104	103	108	102	102	99																		
10	131	110	129	109	128	108	108	127	109	125	108	124	107	107	117	106	116	106	105	110	104	103	101																		

配光曲線

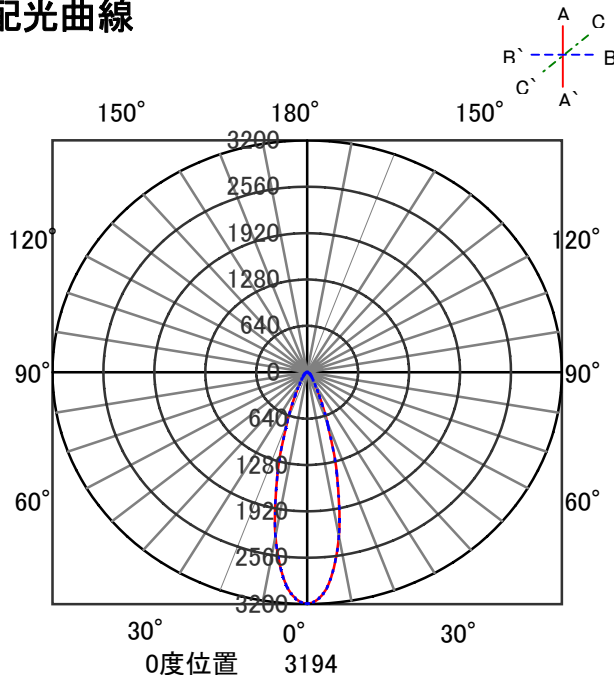

直射水平面照度

