


ECOHiLUX照明器具 配光データシート

意匠図


器具品名	ダウンライト リニューアルタイプ	保守率	
器具品番	DL12L-50RP12-10W-D	良	0.78
部品品名	-	中	0.74
部品品番	-	否	0.70
器具光束	1450lm	器具効率	
光源	-	上方向	0%
光源光束	一体型器具のため、器具光束表示	下方向	100%
		全方向	100%

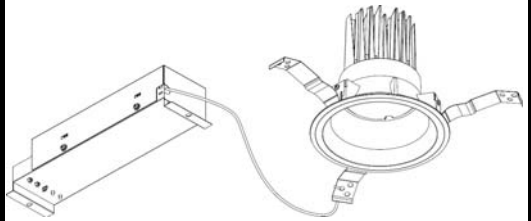

照明率表

反射率	天井	80								70				50				30				0								
		壁		70		50		30		10		70		50		30		10		50		30		10		30		10		0
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0
室 指 数	0.4	61	58	50	48	44	43	39	60	57	50	48	44	43	39	49	47	43	42	39	43	42	39	43	42	39	38			
	0.6	80	74	69	65	62	60	56	78	73	68	65	61	60	56	67	64	61	59	56	60	59	56	60	59	56	54			
	0.8	91	82	80	75	73	70	66	89	81	79	74	72	69	66	77	73	71	69	66	70	68	65	64						
	1	98	88	87	81	80	76	72	95	87	86	80	79	76	72	83	79	78	75	72	76	74	72	70						
	1.25	104	92	94	86	87	82	79	101	91	93	86	86	82	78	90	84	84	81	78	82	80	77	76						
	1.5	108	95	99	90	92	86	83	105	94	97	89	91	85	82	94	88	89	84	82	86	83	81	79						
	2	113	99	106	94	100	91	88	110	98	103	94	98	90	88	99	92	95	89	87	91	88	86	84						
	2.5	117	101	110	97	105	94	92	113	100	108	97	103	94	91	103	95	99	92	90	95	91	89	87						
	3	119	102	113	99	108	97	94	116	101	111	98	106	96	94	105	97	102	95	93	97	93	92	90						
	4	123	104	118	102	114	100	98	119	103	115	101	111	99	97	108	99	106	98	96	101	96	95	92						
5	125	105	121	104	117	102	100	120	104	117	103	114	101	100	110	101	108	99	98	103	98	97	94							
7	127	107	124	106	122	104	103	123	106	120	104	118	103	102	113	102	111	102	101	105	100	99	97							
10	129	108	127	107	125	106	106	124	107	123	106	121	105	105	115	104	114	103	103	107	101	101	98							

配光曲線

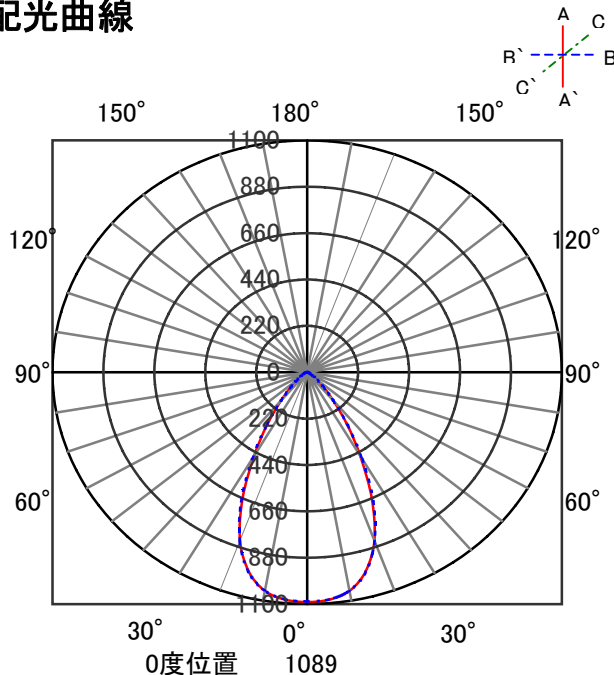

直射水平面照度

