


# ECOHiLUX照明器具 配光データシート

## 意匠図


器具品名	ダウンライト リニューアルタイプ	保守率	
器具品番	DL8N-25RP12-10W-D	良	0.78
部品品名	-	中	0.74
部品品番	-	否	0.70
器具光束	1250lm	器具効率	
光源	-	上方向	0%
光源光束	一体型器具のため、器具光束表示	下方向	100%
		全方向	100%

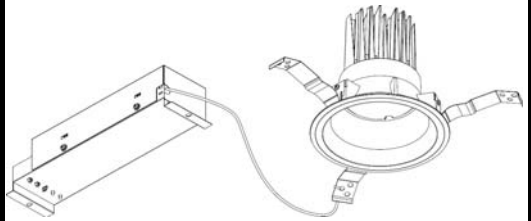

## 照明率表

反射率	天井	80								70				50				30				0							
		壁		70		50		30		10		70		50		30		10		50		30		10		30		10	
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	10	30	10	10	30	10	0
室 指 数	0.4	65	61	54	52	48	47	44	64	61	54	52	48	47	44	53	51	47	47	43	47	46	43	42					
	0.6	84	78	73	70	67	65	61	83	77	73	69	66	65	61	71	69	66	64	61	65	64	61	60					
	0.8	95	86	84	79	78	74	71	93	85	83	79	77	74	71	81	78	76	74	71	75	73	70	69					
	1	102	91	92	85	85	80	77	99	90	90	84	84	80	77	88	83	82	79	77	81	79	76	75					
	1.25	108	96	98	90	92	86	83	105	94	97	89	91	86	83	94	88	89	85	82	87	84	82	80					
	1.5	111	98	103	93	96	90	86	109	97	101	93	95	89	86	97	91	92	88	86	90	87	85	83					
	2	117	101	109	98	103	94	92	113	100	107	97	101	94	91	102	95	98	92	90	95	91	89	88					
	2.5	120	104	114	100	108	98	95	116	102	111	99	106	97	95	106	98	102	96	94	98	94	93	91					
	3	122	105	117	102	112	100	98	119	104	114	101	109	99	97	108	99	105	98	96	101	96	95	93					
	4	126	107	121	105	117	103	101	121	106	118	104	114	102	100	111	102	109	100	99	104	99	98	95					
5	127	108	124	106	120	105	103	123	107	120	105	117	104	103	113	103	111	102	101	106	101	100	97						
7	130	109	127	108	125	107	106	125	108	123	107	121	106	105	116	105	114	104	104	108	103	102	99						
10	132	110	130	109	128	109	108	127	109	125	108	124	108	107	118	106	117	106	106	110	104	104	101						

## 配光曲線

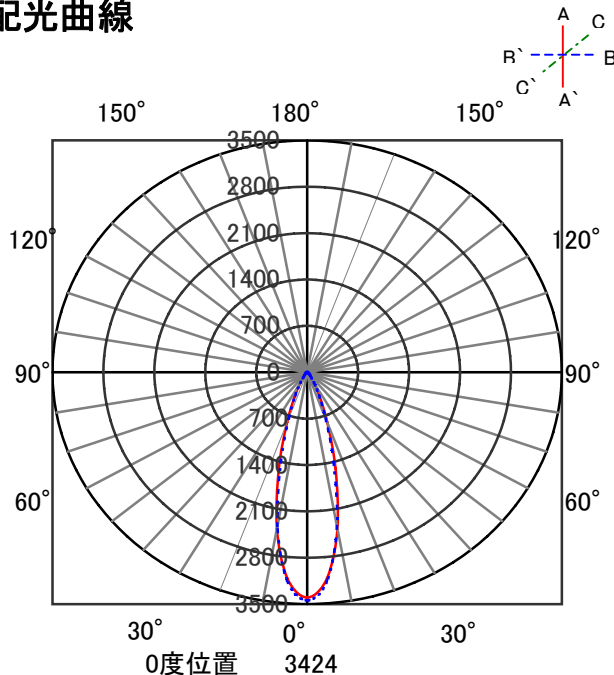

## 直射水平面照度

