


## ECOHiLUX 照明器具 配光データシート

## 意匠図

器具品名	ラインルクス	保守率	
		良	0.77
器具品番	LDMOBL-35WW-CL40	中	
部品品名	-	否	
部品品番	-	器具効率	
器具光束	3560lm	上方向	2%
光源	LED	下方向	98%
光源光束	一体型器具のため、器具光束表示	全方向	100%

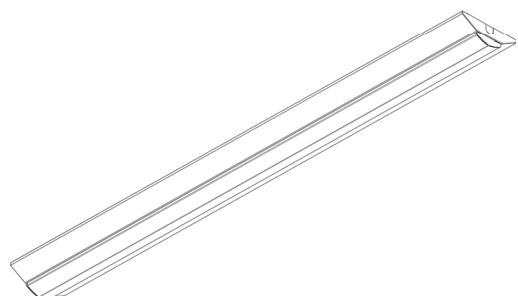


## 照明率表

## 作業面照明率(×0.01)

反 射 率	天井	80						70						50						30						0	
		壁		70		50		30		10		70		50		30		10		50		30		10		0	
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	10	10	0
室 指 数	0.4	39	37	27	26	20	20	16	38	36	26	25	20	19	16	25	25	19	19	15	19	19	15	14			
	0.6	54	50	41	39	33	32	27	52	48	40	38	32	31	27	38	37	31	31	26	31	30	26	24			
	0.8	63	57	49	46	41	39	34	61	56	48	45	40	38	33	46	44	39	38	33	38	37	33	30			
	1	71	63	57	53	48	46	40	68	62	56	52	48	45	40	53	50	46	44	40	45	43	39	37			
	1.25	78	69	65	60	57	53	48	75	67	64	59	56	52	47	61	57	54	51	47	52	50	46	44			
	1.5	83	73	71	64	62	58	52	79	71	69	63	61	57	52	65	61	58	56	51	56	54	50	48			
	2	90	78	79	71	71	65	60	86	76	77	69	69	64	59	72	67	66	62	58	63	61	57	55			
	2.5	94	81	85	75	78	70	65	91	80	82	74	76	69	65	77	72	72	67	64	69	66	63	60			
	3	97	84	89	78	82	73	69	94	82	86	77	80	72	69	81	74	76	71	67	72	69	66	63			
	4	102	86	95	82	89	78	75	98	85	92	81	86	77	74	86	78	81	75	72	77	73	71	68			
	5	104	88	99	85	93	81	78	100	87	95	83	90	80	77	89	81	85	78	76	80	76	74	71			
	7	108	90	103	88	99	85	83	103	89	99	86	96	84	82	92	84	89	82	80	84	80	78	75			
	10	110	92	107	90	104	88	86	106	90	103	89	100	87	85	95	86	93	84	83	87	82	81	78			

## 配光曲線

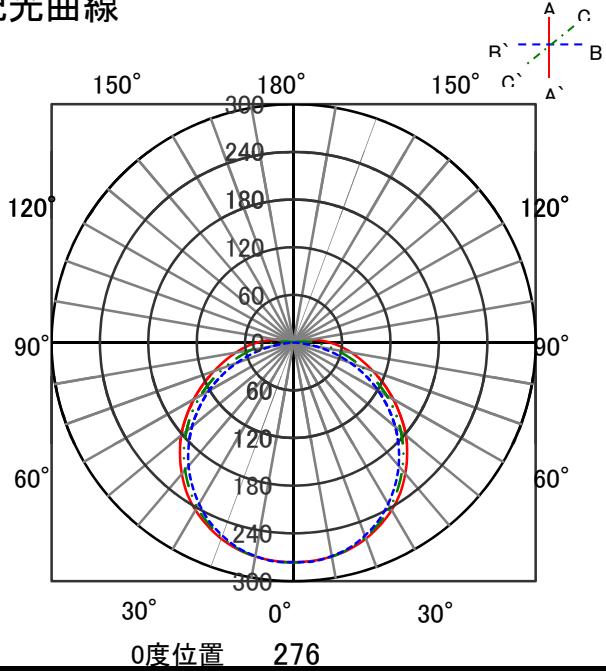

## 直射水平面照度

