


## ECOHiLUX照明器具 配光データシート

## 意匠図

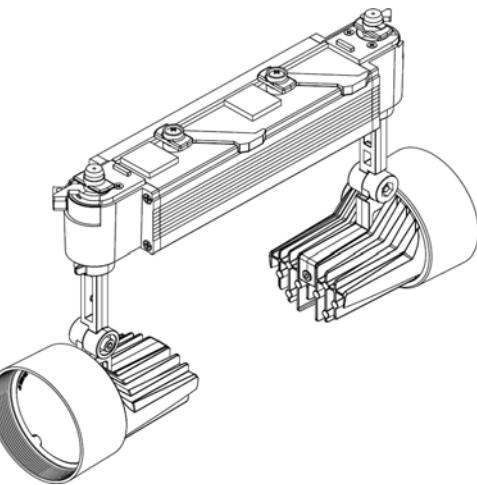

器具品名	ツインスポットライト	保守率	
器具品番	SP24L30-25TWW	良	0.78
部品品名	-	中	0.74
部品品番	-	否	0.70
器具効率		器具効率	
器具光束	1500lm	上方向	0%
光源	1500lm × 2	下方向	100%
光源光束	一体型器具のため、器具光束表示	全方向	100%

## 照明率表(1灯あたり)

反射率	天井	作業面照明率(×0.01)												0		
		80		70		50		30		10		50		30		
		壁	70	50	30	10	70	50	30	10	10	30	10	30	10	10
室 指 数	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10
	0.4	60	56	49	47	43	42	38	59	55	48	47	42	42	38	37
	0.6	78	72	67	63	60	58	54	76	71	66	63	60	58	54	53
	0.8	88	80	77	73	70	67	64	86	79	76	72	70	67	64	62
	1	95	85	84	78	77	73	70	93	84	83	78	77	73	70	69
	1.25	101	90	91	84	84	79	76	98	88	90	83	83	79	75	73
	1.5	105	92	96	87	89	83	79	102	91	94	86	88	82	79	76
	2	110	96	102	92	96	88	85	107	95	100	91	95	87	84	81
	2.5	114	98	107	95	101	91	89	110	97	104	94	99	91	88	84
	3	116	100	110	97	105	94	91	113	99	107	96	103	93	91	86
4	120	102	115	99	111	97	95	116	100	111	98	108	96	95	93	90
	5	122	103	118	101	114	99	98	118	102	114	100	111	98	97	95
	7	124	104	121	103	119	102	101	120	103	117	102	115	101	100	97
	10	126	105	124	105	122	104	103	121	104	120	103	118	103	102	96

## 配光曲線(1灯あたり)

