



| ECOHiLUX照明器具 配光データシート | | | |
|-----------------------|----------------------|------|------|
| 器具品名 | ラインルクス | 保守率 | |
| 器具品番 | LDMOBL-47W-CL110WT-D | 良 | 0.77 |
| 部品品名 | - | 中 | 0.72 |
| 部品品番 | - | 否 | 0.64 |
| 器具光束 | 4740lm | 器具効率 | |
| 光源 | LED | 上方向 | 3% |
| 光源光束 | 一体型器具のため、器具光束表示 | 下方向 | 97% |
| | | 全方向 | 100% |

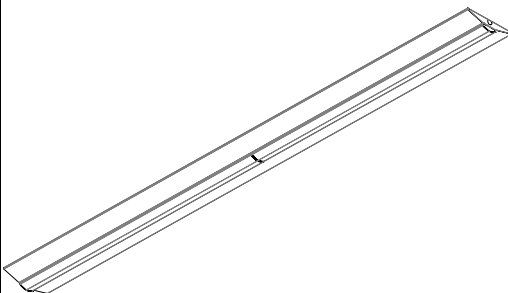

照明率表

| | | 作業面照明率(×0.01) | | | | | | | | | | | | | | | |
|-------------|------|---------------|-----|-----|-----|-----|----|----|-----|-----|-----|----|-----|----|----|-----|----|
| 反射率 | 天井 | 80 | | | | | | | | 70 | | | | | | | |
| | 壁 | 70 | | 50 | | 30 | | 10 | | 70 | | 50 | | 30 | | 10 | |
| | 床 | 30 | 10 | 30 | 10 | 30 | 10 | 10 | 30 | 10 | 30 | 10 | 30 | 10 | 10 | 30 | 10 |
| 室 指 数 | 0.4 | 43 | 41 | 30 | 29 | 22 | 22 | 17 | 42 | 40 | 29 | 28 | 22 | 21 | 17 | 28 | 27 |
| | 0.6 | 60 | 55 | 45 | 43 | 36 | 35 | 29 | 58 | 53 | 44 | 42 | 35 | 34 | 29 | 42 | 40 |
| | 0.8 | 70 | 63 | 55 | 51 | 45 | 43 | 37 | 67 | 62 | 53 | 50 | 44 | 42 | 36 | 51 | 48 |
| | 1 | 78 | 70 | 63 | 59 | 53 | 51 | 44 | 75 | 68 | 62 | 58 | 52 | 50 | 44 | 59 | 56 |
| | 1.25 | 87 | 77 | 73 | 67 | 62 | 59 | 52 | 83 | 75 | 71 | 65 | 61 | 58 | 52 | 67 | 63 |
| | 1.5 | 92 | 81 | 79 | 71 | 69 | 64 | 58 | 88 | 79 | 76 | 70 | 67 | 63 | 57 | 72 | 67 |
| | 2 | 100 | 87 | 88 | 79 | 79 | 72 | 66 | 96 | 85 | 85 | 77 | 77 | 71 | 65 | 80 | 74 |
| | 2.5 | 105 | 91 | 95 | 84 | 86 | 78 | 72 | 101 | 89 | 92 | 82 | 84 | 76 | 72 | 86 | 79 |
| | 3 | 109 | 93 | 99 | 87 | 91 | 82 | 77 | 104 | 91 | 96 | 85 | 89 | 80 | 76 | 89 | 82 |
| | 4 | 114 | 97 | 106 | 91 | 99 | 87 | 83 | 109 | 94 | 102 | 90 | 96 | 86 | 82 | 95 | 87 |
| | 5 | 117 | 99 | 110 | 94 | 104 | 90 | 87 | 112 | 97 | 106 | 93 | 100 | 89 | 86 | 98 | 90 |
| | 7 | 120 | 101 | 115 | 98 | 110 | 95 | 92 | 115 | 99 | 111 | 96 | 106 | 93 | 91 | 102 | 93 |
| | 10 | 123 | 103 | 119 | 101 | 116 | 98 | 96 | 118 | 101 | 114 | 99 | 111 | 97 | 95 | 106 | 96 |

配光曲線

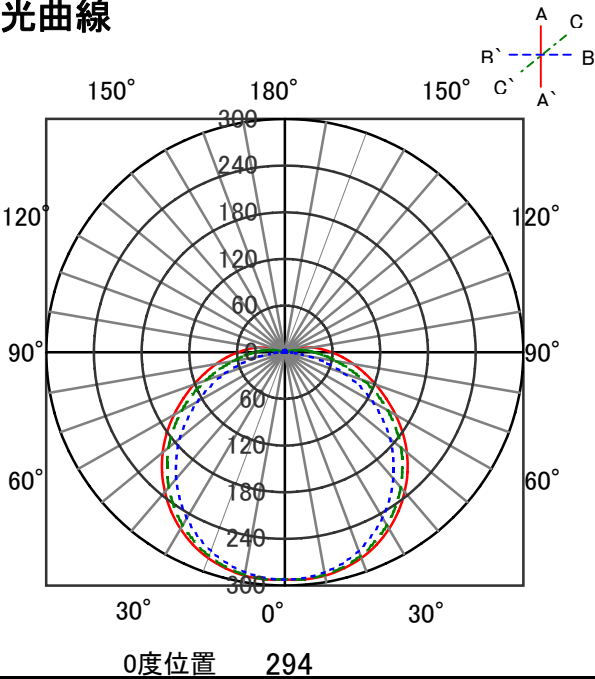

直射水平面照度

