


# ECOHiLUX照明器具 配光データシート

## 意匠図


器具品名	ラインルクス	保守率	
器具品番	LDMOBL-19N-UK40-W240	良	0.77
部品品名	-	中	0.72
部品品番	-	否	0.64
器具光束	1940lm	器具効率	
光源	LED	上方向	0%
光源光束	一体型器具のため、器具光束表示	下方向	97%
		全方向	97%

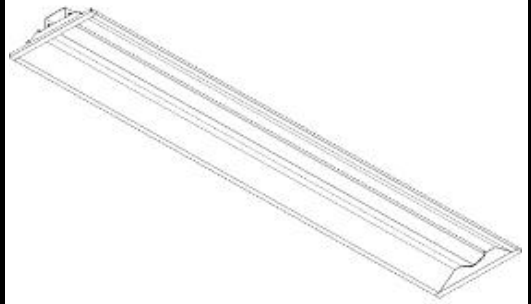

## 照明率表

反射率	天井 壁 床	作業面照明率(×0.01)																						
		80				70				50				30				0						
		70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	30	10	10	0			
室 指 数	0.4	45	42	31	30	24	23	19	44	41	31	30	23	23	19	30	29	23	23	19	23	22	18	17
	0.6	62	57	47	45	39	37	32	60	56	47	44	38	37	32	45	43	37	37	32	37	36	32	30
	0.8	73	66	57	54	48	46	40	70	64	56	53	47	45	40	54	52	46	45	40	45	44	39	37
	1	81	73	67	62	57	54	48	79	71	65	61	56	54	48	63	59	55	53	48	53	52	47	45
	1.25	90	80	76	70	67	63	57	87	78	75	69	66	62	57	71	67	64	61	56	62	60	56	53
	1.5	95	84	82	75	73	68	62	92	82	80	74	72	67	62	77	72	69	66	61	67	65	60	58
	2	103	90	92	82	83	76	71	100	88	90	81	82	75	70	85	79	78	74	70	75	73	69	66
	2.5	109	94	99	87	91	82	77	105	92	96	86	89	81	77	91	84	85	80	76	82	78	75	72
	3	112	96	104	91	96	86	82	108	95	100	90	94	85	81	95	87	90	83	80	86	82	79	76
	4	117	99	110	95	104	91	88	113	98	106	94	101	90	87	100	92	96	88	86	91	87	84	82
5	120	101	114	98	109	95	92	115	100	110	97	106	94	91	103	94	100	92	89	95	90	88	85	
7	123	104	119	101	115	99	96	119	102	115	100	111	98	96	107	97	105	96	94	99	94	92	89	
10	126	105	123	103	120	102	100	121	104	118	102	116	101	99	110	100	108	98	97	102	96	95	92	

## 配光曲線

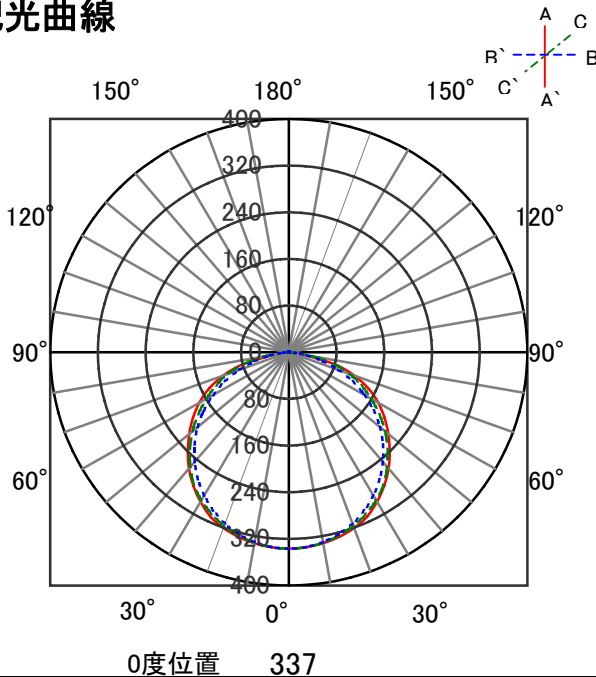

## 直射水平面照度

