


# ECOHiLUX照明器具 配光データシート

## 意匠図


器具品名	引掛け小型シーリングライト	保守率	
器具品番	SCL7L-MS-P	良	0.67
部品品名	-	中	0.63
部品品番	-	否	0.56
器具光束	700lm	器具効率	
光源	-	上方向	3%
光源光束	-	下方向	97%
		全方向	100%

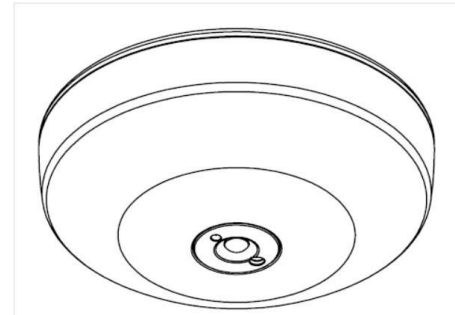

## 照明率表

		作業面照明率(×0.01)																													
反射率	天井 壁 床	80								70								50				30				0					
		70	10	30	10	30	10	10	10	70	10	30	10	30	10	10	10	50	10	30	10	10	30	10	10	30	10	10	10	0	10
室 指 数	0.4	43	41	30	29	22	22	17	42	39	29	28	22	21	17	28	27	21	21	17	21	20	16	15							
	0.6	59	55	44	42	35	34	29	57	53	43	41	35	34	29	41	40	34	33	28	33	32	28	25							
	0.8	69	63	54	51	44	42	36	67	61	53	50	43	42	36	50	48	42	41	35	40	39	35	32							
	1	78	70	63	58	52	50	43	75	68	61	57	51	49	43	58	55	50	48	42	48	47	42	39							
	1.25	86	76	72	66	61	58	51	83	74	70	64	60	57	51	66	62	58	55	50	55	54	49	46							
	1.5	91	80	78	70	67	63	56	87	78	75	69	66	62	56	71	66	63	60	55	60	58	54	50							
	2	99	86	87	78	77	71	65	95	84	84	76	75	70	64	79	73	72	68	63	68	66	61	58							
	2.5	104	90	94	83	85	77	71	100	88	90	81	83	75	70	85	78	78	73	69	74	71	67	64							
	3	108	93	98	86	90	80	75	103	91	95	85	88	79	75	88	81	83	77	73	78	75	71	67							
	4	113	96	105	91	98	86	82	108	94	101	89	95	85	81	94	86	89	82	79	83	80	77	73							
5	116	98	109	94	103	90	86	111	96	105	92	99	88	85	97	89	93	85	82	87	83	80	76								
7	120	101	114	97	109	94	91	115	99	110	96	105	93	90	102	92	98	90	87	92	87	85	81								
10	123	103	119	100	115	98	95	117	101	114	98	110	96	94	105	95	102	93	91	95	90	89	84								

## 配光曲線

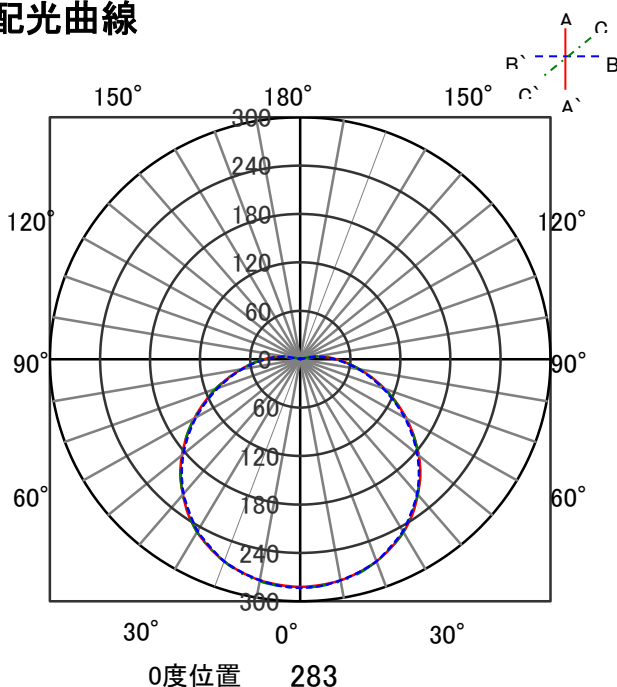

## 直射水平面照度

