


ECOHiLUX照明器具 配光データシート

意匠図

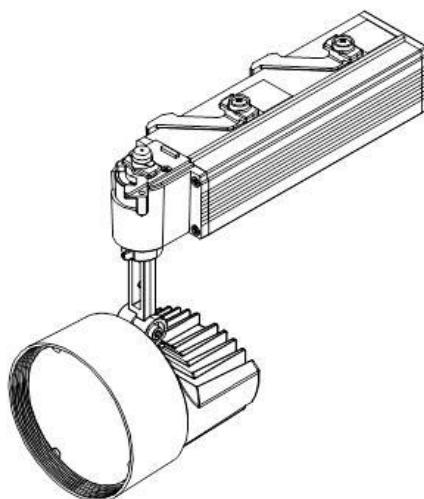


器具品名	スポットライト ファインカラータイプ	保守率	
		良	
器具品番	SP20L30-30UCW-FC	中	
		否	
部品品名	-	器具効率	
		上方向	0%
部品品番	-	下方向	100%
		全方向	100%
器具光束	1900lm		
光源	-		
光源光束	一体型器具のため、器具光束表示		

照明率表

作業面照明率(×0.01)																				
反射率	天井	80								70								50		
		壁		70		50		30		10		70		50		30		10		
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	0
室 指 数	0.4	60	56	48	47	42	41	37	59	56	48	46	42	41	37	47	46	41	41	36
	0.6	79	72	67	63	60	58	54	77	71	66	63	59	57	54	65	62	58	57	53
	0.8	89	81	78	73	70	68	64	87	80	77	73	70	67	63	75	71	69	67	61
	1	97	87	86	80	78	74	70	94	86	84	79	77	74	70	82	78	76	73	68
	1.25	103	92	93	85	86	80	77	101	91	91	85	85	80	76	88	83	79	76	74
	1.5	108	95	98	89	91	85	81	105	94	96	88	90	84	81	93	87	87	83	82
	2	113	99	105	94	99	90	87	110	97	103	93	97	90	87	98	91	94	88	85
	2.5	117	101	110	97	104	94	91	114	100	107	96	102	93	91	102	95	98	92	90
	3	120	103	113	99	108	97	94	116	102	110	98	106	96	93	105	97	101	94	91
	4	123	105	118	102	114	100	98	119	104	115	101	111	99	97	109	99	106	98	95
	5	125	106	121	104	117	102	101	121	105	118	103	114	101	100	111	101	108	100	97
	7	128	108	125	106	122	105	104	123	106	121	105	118	104	103	114	103	112	102	100
	10	130	109	128	108	126	107	106	125	107	123	107	122	106	105	116	105	114	104	102

配光曲線

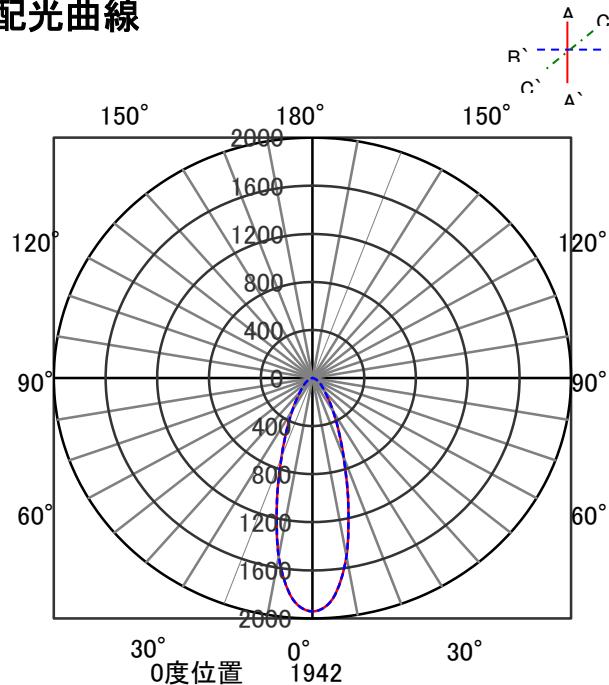

直射水平面照度

