


ECOHiLUX照明器具 配光データシート

意匠図


器具品名	LEDポーチ・浴室灯	保守率	
器具品番	IRCL10N-CIPLW-BS-P	良	0.63
部品品名	-	中	0.60
部品品番	-	否	0.56
器具光束	1020lm	器具効率	
光源	LED	上方向	14%
光源光束	一体型器具のため、器具光束表示	下方向	86%
		全方向	100%

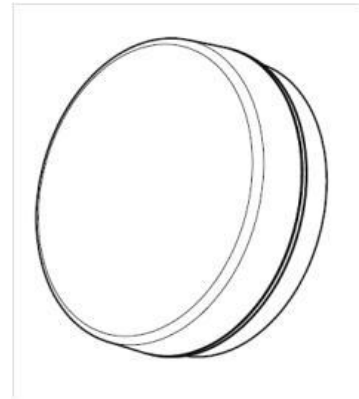

照明率表

		作業面照明率(×0.01)																						
反射率	天井	80				70				50				30				0						
	壁	70	50	30	10	70	50	30	10	50	30	10	30	10	10	30	10	10	30	10	10	0	0	
室 指 数	0.4	45	42	31	30	23	23	18	43	41	30	29	23	22	18	28	27	22	21	17	20	20	16	14
	0.6	61	57	46	44	37	36	30	59	54	45	43	36	35	30	42	40	34	33	29	32	32	28	24
	0.8	72	65	56	53	46	44	38	68	63	54	51	45	43	37	50	48	42	41	36	40	39	34	31
	1	80	72	65	60	55	52	45	76	69	63	58	53	51	45	58	55	50	48	43	47	46	41	37
	1.25	89	79	74	68	64	60	54	84	76	71	66	62	58	52	66	62	58	56	50	55	53	48	44
	1.5	94	83	80	73	70	65	59	89	80	77	71	68	63	58	71	66	63	60	55	59	57	53	48
	2	102	89	90	80	80	73	67	97	86	86	78	77	71	66	79	73	72	68	63	67	64	60	55
	2.5	108	93	97	86	88	79	74	102	90	93	83	85	77	72	85	78	78	73	69	73	70	66	60
	3	111	95	102	89	93	83	78	105	92	97	86	90	81	77	88	81	83	77	73	76	73	70	64
	4	116	99	108	94	101	89	85	110	96	103	91	97	87	83	94	86	89	82	79	82	78	75	69
5	119	101	112	97	106	93	89	113	98	107	94	102	90	87	97	89	93	86	83	85	81	79	72	
7	123	104	118	100	113	97	94	117	100	112	97	108	95	92	101	92	98	90	87	90	85	83	76	
10	126	105	122	103	118	101	98	119	102	116	100	113	98	96	105	95	102	93	91	93	88	87	80	

配光曲線

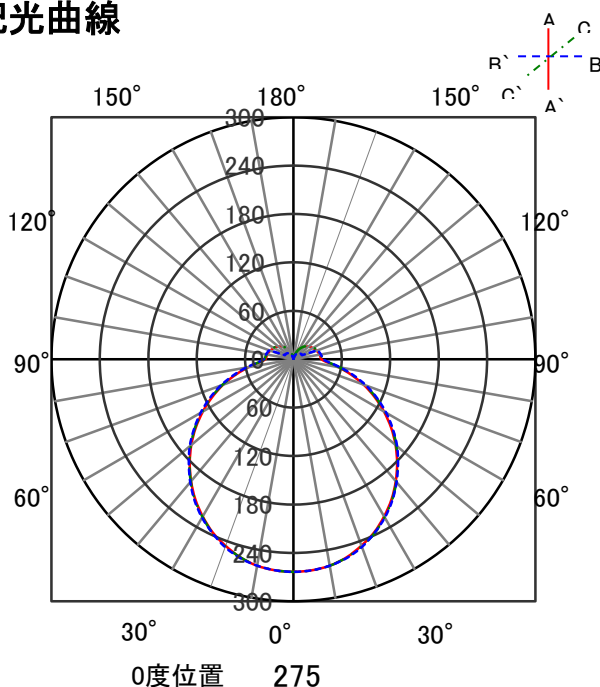

直射水平面照度

