


# ECOHiLUX照明器具 配光データシート

## 意匠図


|      |                   |      |      |
|------|-------------------|------|------|
| 器具品名 | LEDポーチ灯           | 保守率  |      |
| 器具品番 | IRCL5L-CIFRS-BS-P | 良    | 0.63 |
| 部品品名 | -                 | 中    | 0.60 |
| 部品品番 | -                 | 否    | 0.56 |
| 器具光束 | 480lm             | 器具効率 |      |
| 光源   | LED               | 上方向  | 12%  |
| 光源光束 | 一体型器具のため、器具光束表示   | 下方向  | 88%  |
|      |                   | 全方向  | 100% |

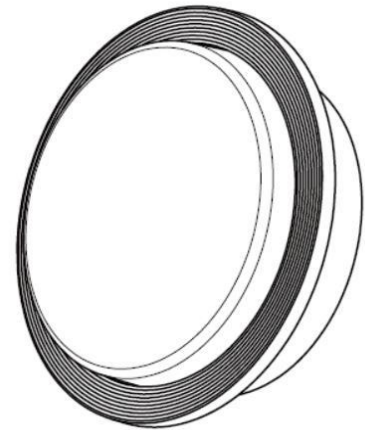

## 照明率表

|             |              | 作業面照明率(×0.01) |     |     |     |     |    |     |     |     |     |     |    |    |     |    |     |    |    |    |    |    |    |    |
|-------------|--------------|---------------|-----|-----|-----|-----|----|-----|-----|-----|-----|-----|----|----|-----|----|-----|----|----|----|----|----|----|----|
| 反射率         | 天井<br>壁<br>床 | 80            |     |     |     |     |    | 70  |     |     |     | 50  |    |    |     | 30 |     | 0  |    |    |    |    |    |    |
|             |              | 70            | 50  | 30  | 10  | 70  | 50 | 30  | 10  | 70  | 50  | 30  | 10 | 50 | 30  | 10 | 30  | 10 | 0  | 0  |    |    |    |    |
| 室<br>指<br>数 | 0.4          | 45            | 42  | 31  | 30  | 24  | 23 | 18  | 43  | 41  | 30  | 29  | 23 | 23 | 18  | 29 | 28  | 22 | 22 | 17 | 21 | 21 | 17 | 15 |
|             | 0.6          | 62            | 57  | 47  | 44  | 37  | 36 | 31  | 59  | 55  | 45  | 43  | 36 | 35 | 30  | 42 | 41  | 35 | 34 | 29 | 33 | 33 | 28 | 25 |
|             | 0.8          | 72            | 65  | 56  | 53  | 46  | 44 | 38  | 69  | 63  | 54  | 51  | 45 | 43 | 38  | 51 | 49  | 43 | 42 | 36 | 41 | 40 | 35 | 32 |
|             | 1            | 81            | 72  | 65  | 61  | 55  | 52 | 46  | 77  | 70  | 63  | 59  | 53 | 51 | 45  | 59 | 56  | 51 | 49 | 43 | 48 | 47 | 42 | 38 |
|             | 1.25         | 89            | 79  | 75  | 68  | 64  | 60 | 54  | 85  | 76  | 72  | 66  | 62 | 59 | 53  | 67 | 63  | 59 | 56 | 51 | 56 | 54 | 49 | 45 |
|             | 1.5          | 94            | 83  | 81  | 73  | 70  | 65 | 59  | 90  | 80  | 78  | 71  | 68 | 64 | 58  | 72 | 67  | 64 | 61 | 56 | 60 | 58 | 54 | 49 |
|             | 2            | 102           | 89  | 90  | 81  | 81  | 74 | 68  | 97  | 86  | 87  | 78  | 78 | 72 | 66  | 80 | 74  | 73 | 69 | 64 | 68 | 65 | 61 | 56 |
|             | 2.5          | 108           | 93  | 97  | 86  | 88  | 80 | 74  | 103 | 90  | 93  | 84  | 85 | 78 | 73  | 85 | 79  | 79 | 74 | 70 | 74 | 71 | 67 | 62 |
|             | 3            | 112           | 96  | 102 | 89  | 94  | 84 | 79  | 106 | 93  | 97  | 87  | 90 | 82 | 77  | 89 | 82  | 84 | 78 | 74 | 78 | 74 | 71 | 65 |
|             | 4            | 116           | 99  | 108 | 94  | 101 | 89 | 85  | 111 | 96  | 103 | 91  | 97 | 87 | 83  | 95 | 87  | 90 | 83 | 80 | 83 | 79 | 76 | 70 |
| 5           | 120          | 101           | 113 | 97  | 107 | 93  | 89 | 114 | 98  | 108 | 94  | 102 | 91 | 87 | 98  | 89 | 94  | 86 | 83 | 86 | 82 | 80 | 74 |    |
| 7           | 123          | 104           | 118 | 100 | 113 | 97  | 94 | 117 | 101 | 112 | 98  | 108 | 95 | 92 | 102 | 93 | 99  | 90 | 88 | 91 | 86 | 84 | 78 |    |
| 10          | 126          | 106           | 122 | 103 | 119 | 101 | 99 | 120 | 103 | 116 | 101 | 113 | 98 | 96 | 106 | 96 | 103 | 94 | 92 | 94 | 89 | 88 | 81 |    |

## 配光曲線

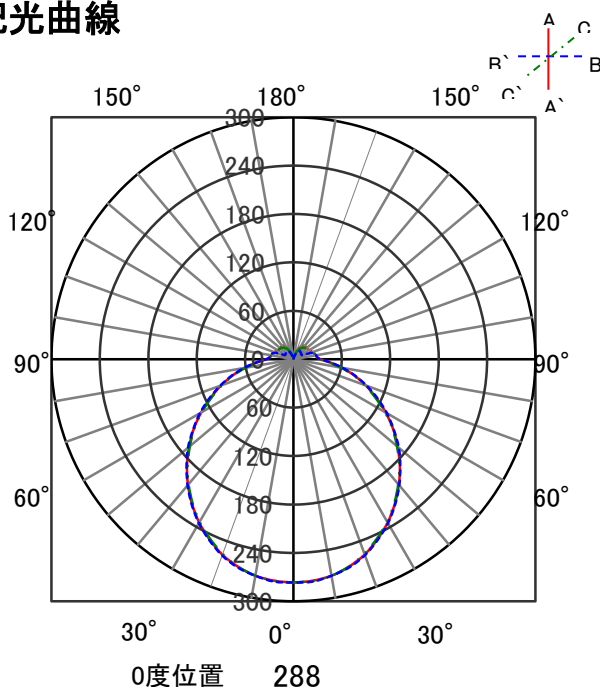

## 直射水平面照度

