


ECOHiLUX照明器具 配光データシート

器具品名	LEDポーチ灯	保守率	
器具品番	IRCL5L-CIFRW-BS-P	良	0.63
部品品名	-	中	0.60
部品品番	-	否	0.56
器具光束	480lm	器具効率	
光源	LED	上方向	12%
光源光束	一体型器具のため、器具光束表示	下方向	88%
		全方向	100%


意匠図

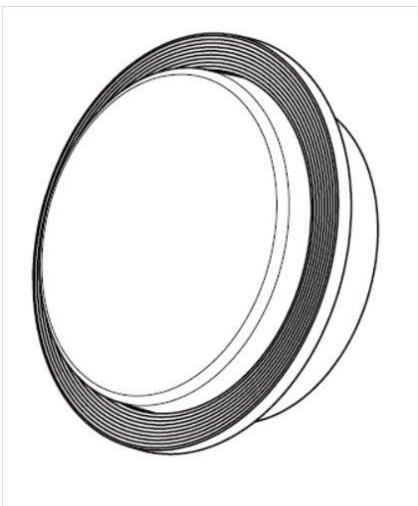

照明率表

作業面照明率(×0.01)																											
反 射 率	天井	80								70								50						30			0
	壁	70		50		30		10		70		50		30		10		50		30		10	30		10	0	
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	10	30	10	0	
室 指 数	0.4	45	42	31	30	24	23	18	43	41	30	29	23	23	18	29	28	22	22	17	21	21	17	15			
	0.6	62	57	47	44	37	36	31	59	55	45	43	36	35	30	42	41	35	34	29	33	33	28	25			
	0.8	72	65	56	53	46	44	38	69	63	54	51	45	43	38	51	49	43	42	36	41	40	35	32			
	1	81	72	65	61	55	52	46	77	70	63	59	53	51	45	59	56	51	49	43	48	47	42	38			
	1.25	89	79	75	68	64	60	54	85	76	72	66	62	59	53	67	63	59	56	51	56	54	49	45			
	1.5	94	83	81	73	70	65	59	90	80	78	71	68	64	58	72	67	64	61	56	60	58	54	49			
	2	102	89	90	81	81	74	68	97	86	87	78	78	72	66	80	74	73	69	64	68	65	61	56			
	2.5	108	93	97	86	88	80	74	103	90	93	84	85	78	73	85	79	79	74	70	74	71	67	62			
	3	112	96	102	89	94	84	79	106	93	97	87	90	82	77	89	82	84	78	74	78	74	71	65			
	4	116	99	108	94	101	89	85	111	96	103	91	97	87	83	95	87	90	83	80	83	79	76	70			
	5	120	101	113	97	107	93	89	114	98	108	94	102	91	87	98	89	94	86	83	86	82	80	74			
7	123	104	118	100	113	97	94	117	101	112	98	108	95	92	102	93	99	90	88	91	86	84	78				
10	126	106	122	103	119	101	99	120	103	116	101	113	98	96	106	96	103	94	92	94	89	88	81				

配光曲線

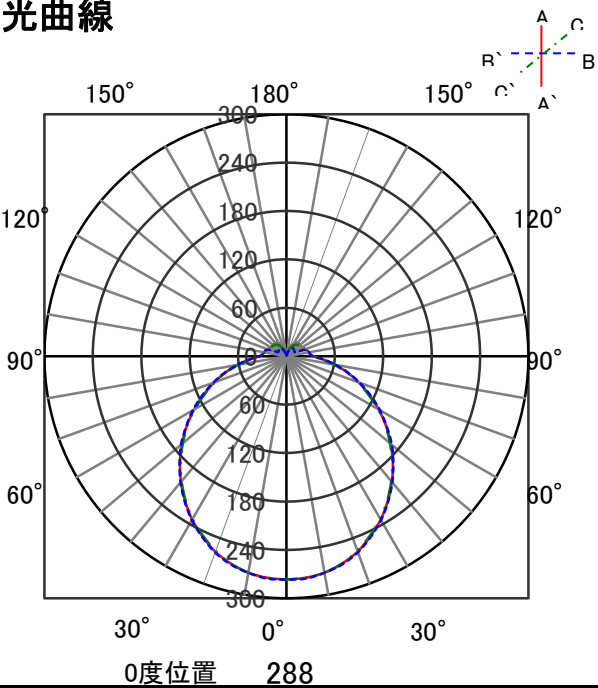

直射水平面照度

