


ECOHiLUX照明器具 配光データシート

意匠図


器具品名	LEDポーチ灯	保守率	
器具品番	IRCL5N-SQFRB-BS-P	良	0.63
部品品名	-	中	0.60
部品品番	-	否	0.56
		器具効率	
器具光束	470lm	上方向	12%
光源	LED	下方向	88%
光源光束	一体型器具のため、器具光束表示	全方向	100%

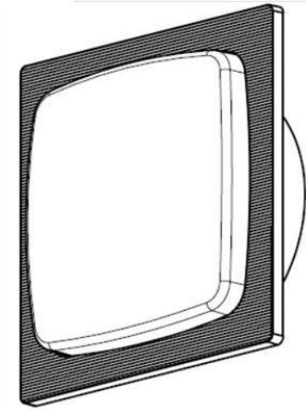

照明率表

		作業面照明率(×0.01)																									
反射率	天井	80								70								50				30				0	
	壁	70	10	30	10	30	10	30	10	70	10	30	10	30	10	30	10	50	30	10	30	10	10	30	10	10	0
室 指 数	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	0
	0.4	46	43	32	31	24	23	19	44	41	31	30	23	23	18	29	28	22	22	18	21	21	17	15			
	0.6	63	58	47	45	38	37	31	60	56	46	44	37	36	31	43	41	35	35	30	34	33	29	26			
	0.8	73	66	57	54	47	45	39	70	64	55	52	46	44	38	52	49	44	42	37	41	40	36	32			
	1	82	73	66	62	56	53	47	78	71	64	60	54	52	46	60	57	51	50	44	49	47	43	39			
	1.25	90	80	76	69	65	61	55	86	77	73	67	63	60	54	68	64	60	57	52	56	55	50	46			
	1.5	96	84	82	74	72	66	60	91	81	79	72	69	65	59	73	68	65	62	57	61	59	55	50			
	2	104	90	91	82	82	75	69	99	87	88	80	79	73	68	81	75	74	70	65	69	67	63	57			
	2.5	109	94	98	87	90	81	75	104	91	94	85	86	79	74	87	80	80	75	71	75	72	68	63			
	3	113	97	103	90	95	85	80	107	94	99	88	91	83	78	91	83	85	79	75	79	75	72	66			
4	118	100	110	95	103	90	86	112	97	105	93	99	88	84	96	88	91	84	81	84	80	77	71				
5	121	102	114	98	108	94	90	115	99	109	96	104	92	88	99	91	95	88	85	88	83	81	75				
7	125	105	120	102	115	99	96	118	102	114	99	110	96	94	104	94	100	92	89	92	87	85	79				
10	128	107	124	104	120	102	100	121	104	118	102	115	100	98	107	97	104	95	93	96	90	89	82				

配光曲線

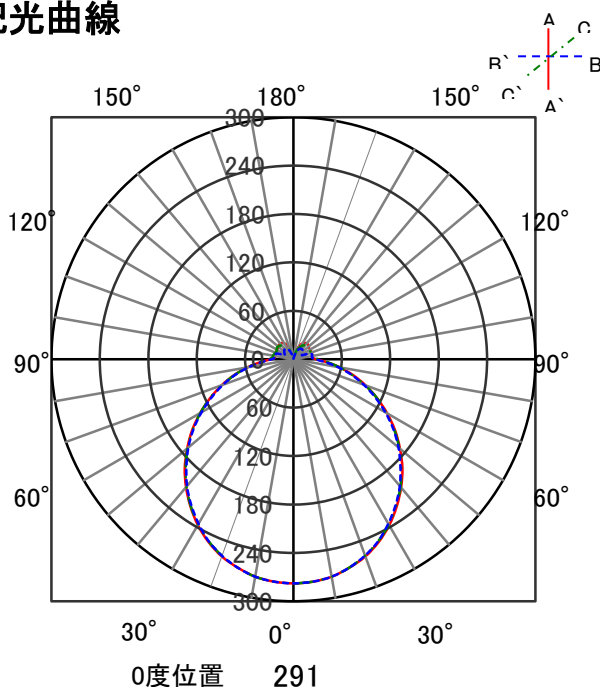

直射水平面照度

