


ECOHiLUX照明器具 配光データシート

器具品名	LEDポーチ灯	保守率	
		良	0.63
器具品番	IRBR5L-SQFRS-MSBS-P	中	
		否	0.56
部品品名	-	器具効率	
		上方向	12%
部品品番	-	下方向	88%
		全方向	100%
器具光束	480lm		
光源	LED		
光源光束	一体型器具のため、器具光束表示		

意匠図

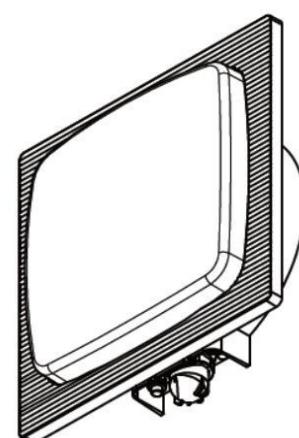


照度率表

作業面照度率(×0.01)

反射率	天井	80				70				50				30				0		
		壁		70	50	30	10	70		50	30	10	50		30	10	30		0	
		床		30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	
室 指 数	0.4	46	43	32	31	24	23	19	44	41	31	30	23	23	18	29	28	22	22	18
	0.6	63	58	47	45	38	37	31	60	56	46	44	37	36	31	43	41	35	35	30
	0.8	73	66	57	54	47	45	39	70	64	55	52	46	44	38	52	49	44	42	37
	1	82	73	66	62	56	53	47	78	71	64	60	54	52	46	60	57	51	50	44
	1.25	90	80	76	69	65	61	55	86	77	73	67	63	60	54	68	64	60	57	52
	1.5	96	84	82	74	72	66	60	91	81	79	72	69	65	59	73	68	65	62	57
	2	104	90	91	82	82	75	69	99	87	88	80	79	73	68	81	75	74	70	65
	2.5	109	94	98	87	90	81	75	104	91	94	85	86	79	74	87	80	80	75	71
	3	113	97	103	90	95	85	80	107	94	99	88	91	83	78	91	83	85	79	75
	4	118	100	110	95	103	90	86	112	97	105	93	99	88	84	96	88	91	84	81
	5	121	102	114	98	108	94	90	115	99	109	96	104	92	88	99	91	95	88	85
	7	125	105	120	102	115	99	96	118	102	114	99	110	96	94	104	94	100	92	89
	10	128	107	124	104	120	102	100	121	104	118	102	115	100	98	107	97	104	95	93

配光曲線

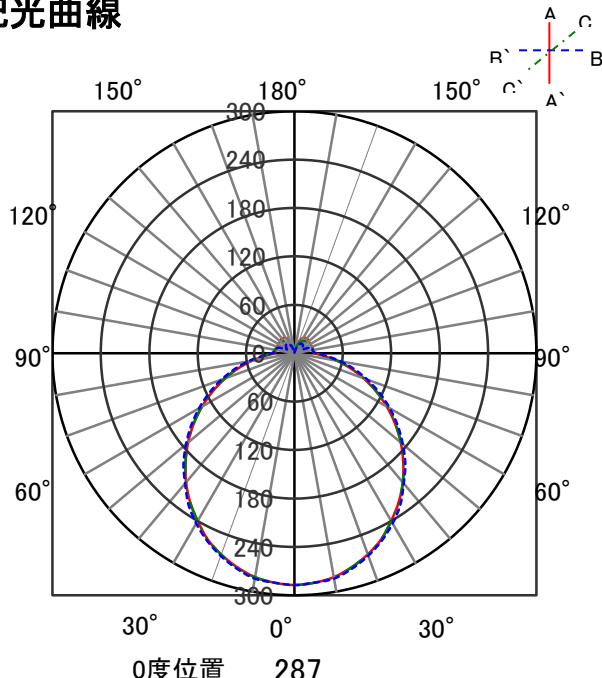

直射水平面照度

