


ECOHiLUX照明器具 配光データシート

意匠図


器具品名	LEDスポットライト S-triaシリーズ	保守率	
器具品番	SP18WW-15STW	良	0.69
部品品名	-	中	0.67
部品品番	-	否	0.63
器具光束	2500lm	器具効率	
光源	-	上方向	0%
光源光束	一体型器具のため、器具光束表示	下方向	100%
		全方向	100%

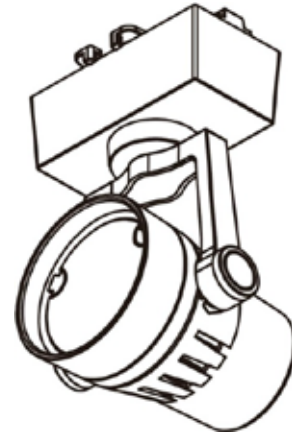

照明率表

		作業面照明率(×0.01)																													
反射率	天井	80								70								50				30				0					
		壁		70		50		30		10		70		50		30		10		50		30		10		30		10		0	
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	30	10	10	30	10	10	0		
室 指 数	0.4	65	61	52	50	45	44	40	64	60	52	50	45	44	40	51	49	45	44	40	44	44	44	40	39						
	0.6	85	78	72	68	64	62	58	83	77	71	68	64	62	58	70	67	63	62	58	62	61	58	56							
	0.8	96	88	84	79	76	73	69	94	86	83	78	76	73	69	81	77	74	72	68	73	71	68	66							
	1	104	94	92	86	84	80	76	102	92	91	85	84	80	76	88	84	82	79	75	80	78	75	73							
	1.25	111	99	100	92	93	87	83	108	98	99	91	91	86	83	95	90	89	85	82	87	85	81	80							
	1.5	116	102	106	96	98	91	87	113	101	104	95	97	91	87	100	93	94	90	86	91	89	86	84							
	2	122	106	113	101	106	97	94	118	105	111	100	104	96	93	106	98	101	95	92	98	94	91	89							
	2.5	126	109	118	105	112	101	98	122	107	115	104	110	100	98	110	102	106	99	96	102	98	95	93							
	3	129	111	122	107	116	104	101	125	109	119	106	114	103	101	113	104	109	102	99	105	100	98	96							
	4	133	113	127	110	122	108	105	128	111	123	109	119	107	105	117	107	114	105	103	108	103	102	99							
5	135	114	130	112	126	110	108	130	113	126	111	123	109	107	119	109	117	107	106	111	105	104	102								
7	137	116	134	114	131	113	111	133	114	130	113	127	112	111	122	111	120	110	109	114	108	107	104								
10	139	117	137	116	135	115	114	135	115	133	115	131	114	113	124	112	123	112	111	116	110	109	106								

配光曲線

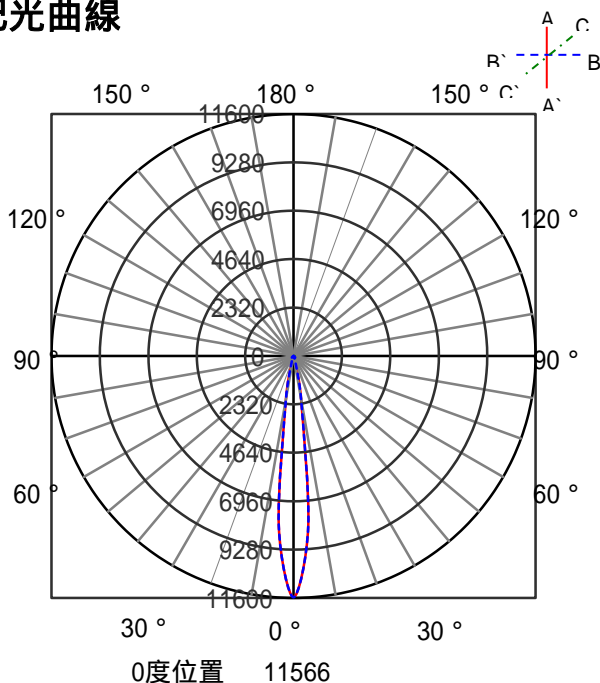

直射水平面照度

