


ECOHiLUX照明器具 配光データシート


器具品名	LEDダウンライト LAシリーズ 高天井用【軒下用】	保守率	
		良	-
器具品番	DL20KN8-40A7W-D-WP	中	-
部品品名	-	否	-
部品品番	-	器具効率	
器具光束	18600lm	上方向	0%
光源	-	下方向	100%
光源光束	一体型器具のため、器具光束表示	全方向	100%

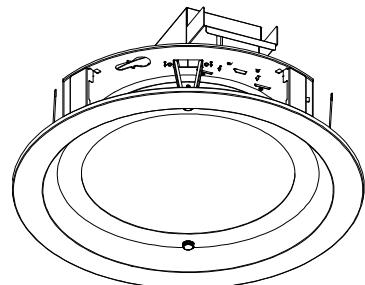

照明率表

		作業面照明率(×0.01)																						
反射率	天井	80						70						50						30				
	壁	70		50		30		10		70		50		30		10		50		30		10		
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	10	0
室指 数	0.4	73	70	60	59	53	52	48	72	69	60	58	53	52	48	59	58	52	52	48	52	52	48	46
	0.6	91	85	77	74	69	67	63	89	84	76	74	68	67	62	75	73	68	67	62	67	66	62	60
	0.8	103	91	89	82	81	75	70	98	91	88	82	80	75	70	83	80	76	74	70	75	74	70	68
	1	103	92	90	85	82	78	73	101	93	89	84	81	78	73	86	83	79	77	73	78	76	72	71
	1.25	111	96	99	92	91	86	81	108	95	97	87	90	86	81	94	90	88	85	81	86	84	80	78
	1.5	112	98	101	93	93	87	83	109	96	99	89	92	87	83	96	91	90	86	82	87	85	81	79
	2	119	100	110	98	103	93	91	116	97	108	92	101	94	90	103	94	98	93	89	95	87	84	86
	2.5	121	101	113	99	106	96	93	117	100	110	94	104	96	92	105	95	100	94	91	97	89	87	88
	3	124	102	117	101	111	100	96	118	102	114	96	108	98	96	108	97	104	97	95	100	92	90	89
	4	126	104	120	103	115	102	99	120	104	116	99	112	99	98	110	98	107	98	97	102	94	93	91
反射 率	5	128	105	123	105	119	104	101	122	106	119	101	115	101	99	112	100	108	99	98	103	97	95	93
	7	128	107	124	106	120	106	103	123	107	120	103	117	103	101	113	102	110	101	100	105	99	98	95
	10	127	108	126	107	121	108	105	125	108	122	105	119	104	103	114	103	112	102	101	106	100	99	96

配光曲線

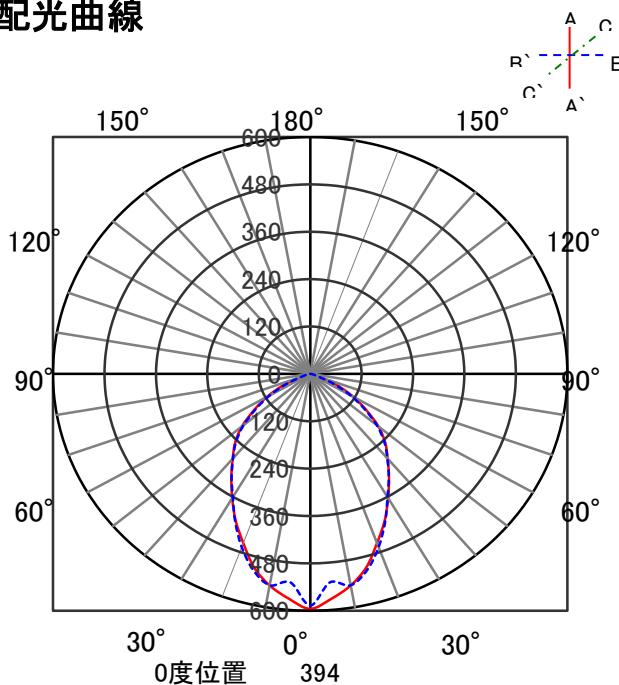

直射水平面照度

