


# ECOHiLUX照明器具 配光データシート

## 意匠図

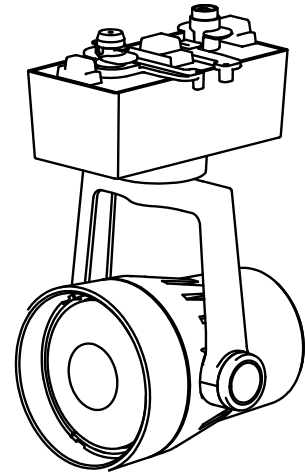


器具品名	S-triaCOBスポットライト 12灯	保守率	
器具品番	SP12W-15SCB	良	0.69
部品品名	-	中	0.67
部品品番	-	否	0.63
器具光束	1660lm	器具効率	
光源	-	上方向	0%
光源光束	一体型器具のため、器具光束表示	下方向	100%
		全方向	100%

## 照明率表

作業面照明率(×0.01)

反射率	天井	80								70								50								30								0							
		壁	70		50		30		10		壁	70		50		30		10		壁	50		30		10		壁	30		10		壁	0								
0.4	66	62	54	52	47	46	43	65	61	54	52	47	46	43	53	51	47	46	43	46	46	43	41																		
0.6	86	79	74	70	66	64	60	84	78	73	69	66	64	60	71	69	65	64	60	64	63	60	58																		
0.8	97	88	85	80	77	74	70	95	87	84	79	77	74	70	82	78	76	73	70	74	73	70	68																		
1	104	93	93	86	85	81	77	101	92	91	85	84	80	77	89	84	83	80	76	81	79	76	74																		
1.25	110	98	100	92	93	87	83	107	97	98	91	91	86	83	95	89	89	86	82	87	85	82	80																		
1.5	115	101	105	95	98	91	87	111	100	103	94	96	90	87	99	93	94	89	86	91	88	86	84																		
2	120	105	112	100	105	96	93	117	103	109	99	103	96	93	105	97	100	94	92	97	93	91	89																		
2.5	124	107	117	103	111	100	97	120	106	114	102	109	99	97	109	100	104	98	96	101	97	95	92																		
3	127	109	120	106	115	103	100	123	108	117	105	112	102	99	111	103	108	100	98	103	99	97	95																		
4	130	111	125	108	121	106	104	126	110	122	107	118	105	103	115	105	112	104	102	107	102	101	98																		
5	133	112	128	110	125	109	107	128	111	125	109	121	108	106	118	107	115	106	105	109	104	103	100																		
7	135	114	132	113	130	111	110	131	113	128	111	126	110	109	120	109	119	108	108	112	107	106	103																		
10	137	115	135	114	133	113	113	132	114	131	113	129	112	112	123	111	121	110	110	115	108	108	105																		

## 配光曲線

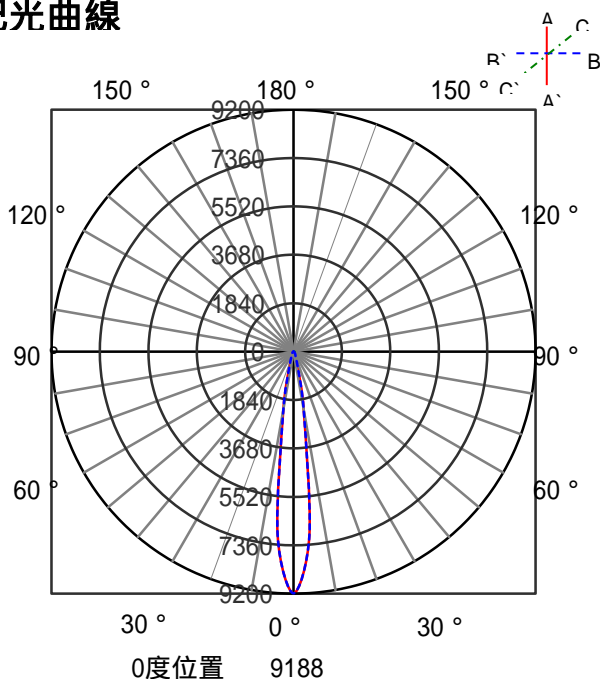

## 直射水平面照度

