


E COHILUX照明器具 配光データシート

意匠図

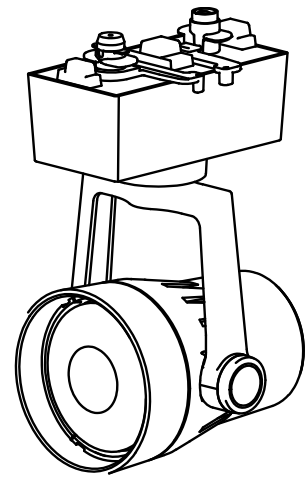


器具品名	S-triaCOBスポットライト 12灯	保守率	
器具品番	SP12N-25SCB	良	0.69
部品品名	-	中	0.67
部品品番	-	否	0.63
器具光束	1540lm	器具効率	
光源	-	上方向	0%
光源光束	一体型器具のため、器具光束表示	下方向	100%
		全方向	100%

照明率表

作業面照明率(×0.01)

(%) 反射率	天井	80								70								50						30				0
	壁	70			50		30			10	70		50		30		10	50		30		10	30		10	0		
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	10	30	10	0		
室 指 数	0.4	58	55	46	45	40	39	35	57	54	46	44	39	39	35	45	44	39	38	35	39	38	35	33				
	0.6	76	70	64	61	56	54	50	75	69	63	60	56	54	50	61	59	55	54	50	54	53	50	48				
	0.8	87	79	75	70	67	64	59	85	78	74	69	66	64	59	71	68	65	63	59	64	62	59	57				
	1	94	85	82	76	74	70	66	92	83	81	76	73	70	66	78	74	72	69	65	70	69	65	63				
	1.25	101	90	90	82	82	77	72	98	88	88	82	81	76	72	85	80	79	75	72	77	75	71	69				
	1.5	106	93	95	86	87	81	77	103	92	93	86	86	81	77	89	84	83	80	76	81	79	75	73				
	2	112	97	103	92	96	87	83	109	96	100	91	94	87	83	96	89	90	85	82	87	84	81	79				
	2.5	116	100	108	96	102	92	88	112	99	105	95	99	91	88	100	93	95	89	87	92	88	86	83				
	3	119	102	112	98	106	95	92	115	101	109	97	104	94	91	103	95	99	92	90	95	91	89	86				
	4	123	105	117	102	112	99	96	119	103	114	101	110	98	96	108	98	104	96	94	99	95	93	91				
	5	126	106	121	104	117	102	99	121	105	117	103	113	101	99	110	101	108	99	97	102	97	96	93				
	7	128	108	125	106	122	105	103	124	107	121	105	118	104	102	114	103	112	102	101	106	100	99	96				
10	131	109	128	108	126	107	106	126	108	124	107	122	106	105	116	105	115	104	103	108	102	102	99					

配光曲線

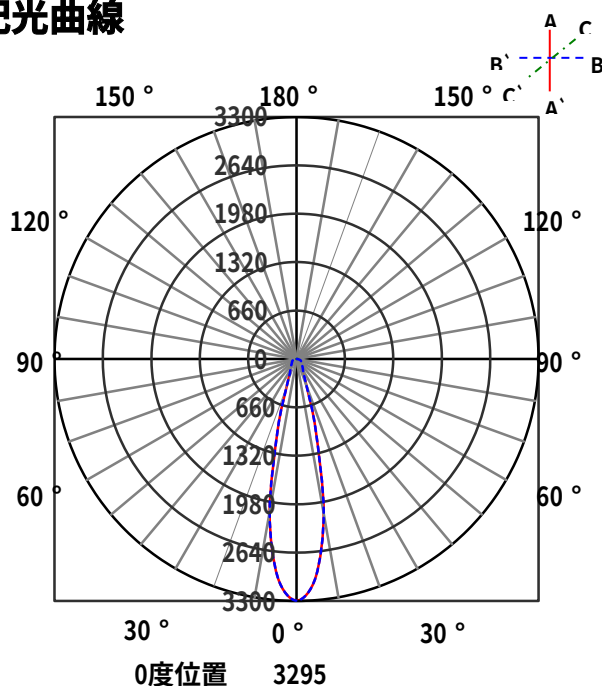

直射水平面照度

