


ECOHiLUX照明器具 配光データシート

意匠図

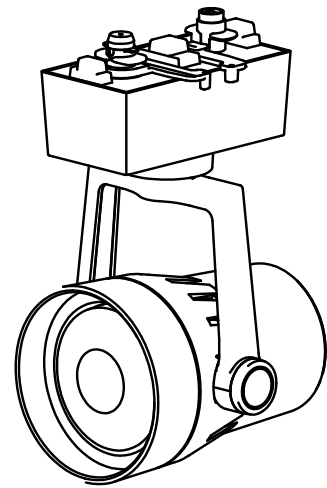


器具品名	S-triaCOBスポットライト 18灯	保守率	
器具品番	SP18L30-50SCW	良	0.69
部品品名	-	中	0.67
部品品番	-	否	0.63
器具光束	2500lm	器具効率	
光源	-	上方向	0%
光源光束	一体型器具のため、器具光束表示	下方向	100%
		全方向	100%

照明率表

作業面照明率(×0.01)

反射率	天井								壁								床							
	80				70				50				30				0							
壁	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10
0.4	61	57	50	48	44	43	39	60	57	49	48	43	39	49	47	43	42	39	43	42	39	38		
0.6	79	73	68	65	61	59	55	78	72	67	64	61	59	55	66	63	60	59	55	59	58	55	54	
0.8	90	82	79	74	72	69	65	88	81	78	73	71	68	65	76	72	70	68	64	69	67	64	63	
1	97	87	86	80	79	75	71	94	86	85	79	78	75	71	82	78	77	74	71	75	73	70	69	
1.25	103	91	93	85	86	81	77	100	90	91	85	85	80	77	88	83	83	79	76	81	79	76	74	
1.5	107	94	98	89	91	85	81	104	93	96	88	90	84	81	92	87	87	83	80	85	82	80	78	
2	113	98	105	93	98	90	87	109	97	102	93	97	89	86	98	91	93	88	85	90	87	85	83	
2.5	116	100	109	97	104	93	91	113	99	107	96	101	93	90	102	94	98	91	89	94	90	88	86	
3	119	102	113	99	107	96	93	115	101	110	98	105	95	93	104	96	101	94	92	96	92	91	88	
4	122	104	117	101	113	99	97	118	103	114	100	110	99	97	108	99	105	97	95	100	95	94	92	
5	124	105	120	103	117	102	100	120	104	117	102	113	101	99	110	100	108	99	98	102	97	96	94	
7	127	107	124	105	121	104	103	122	105	120	104	118	103	102	113	102	111	101	101	105	100	99	96	
10	129	108	127	107	125	106	105	124	106	122	106	121	105	104	115	104	114	103	103	107	101	101	98	

配光曲線

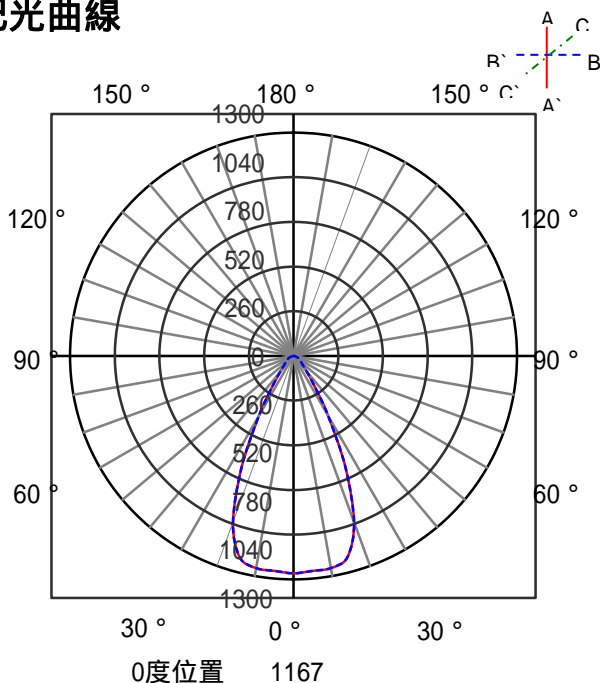

直射水平面照度

