

ECOHiLUX 照明器具 配光データシート

意匠図


器具品名	直管用専用器具 直付下面開放型110形1灯	保守率	
		良	0.69
器具品番	IRLDL111CL	中	
		否	0.67
部品品名	-	否	
		器具効率	
器具光束	4390lm	上方向	0%
		下方向	98%
光源	LDRd86T-N/30/45/16S/R	全方向	98%
光源光束	4500lm		




照度率表

作業面照度率(×0.01)																	0							
反射率	天井		80				70				50				30									
	壁		70	50	30	10	70	50	30	10	50	30	10	30	10	50	30	10						
	床		30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10						
室 指 数	0.4	41	39	28	27	21	21	16	40	38	28	27	21	20	16	27	26	20	20	16	15			
	0.6	57	52	43	40	34	33	28	55	51	42	40	34	33	28	40	39	33	32	28	32	27	26	
	0.8	66	60	52	48	42	41	35	64	59	51	48	42	40	35	49	46	41	40	34	40	39	32	
	1	74	67	60	56	50	48	42	72	65	59	55	50	47	42	56	53	48	47	42	47	46	41	39
	1.25	82	73	69	63	59	56	50	79	71	67	62	58	55	50	64	60	56	54	49	55	53	49	46
	1.5	87	77	74	68	65	60	55	84	75	72	67	64	60	54	69	65	62	59	54	60	58	53	51
	2	95	82	83	74	75	68	63	91	81	81	73	73	67	62	77	71	70	66	62	67	65	61	58
	2.5	100	86	90	79	82	74	69	96	84	87	78	80	73	68	82	76	76	72	68	73	70	67	64
	3	103	88	94	83	87	78	73	99	87	91	81	85	77	73	86	79	81	75	71	77	74	70	68
	4	108	92	100	87	94	83	79	104	90	97	86	91	82	78	91	83	87	80	77	82	79	76	73
	5	111	94	105	90	99	86	83	106	92	101	89	96	85	82	95	86	91	83	81	86	82	79	77
	7	114	96	109	93	105	90	88	110	94	106	92	102	89	87	99	90	96	87	85	90	86	84	81
	10	117	98	113	96	110	93	92	112	96	109	94	106	92	91	102	92	100	90	89	94	89	87	84

配光曲線

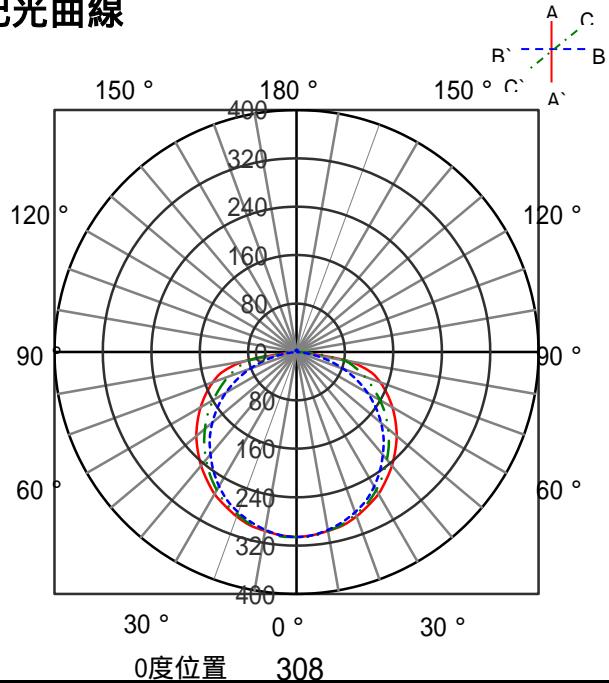

直射水平面照度

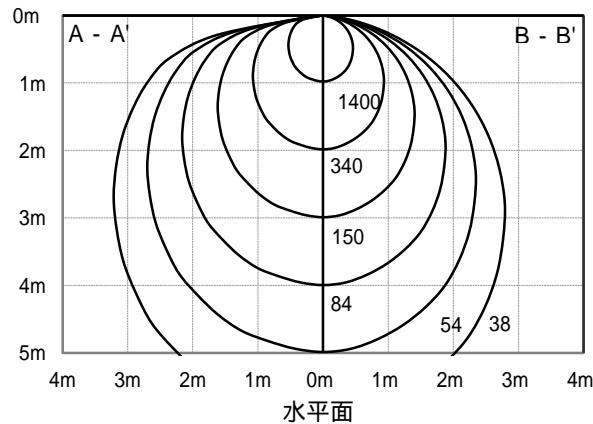

ECOHiLUX 照明器具 配光データシート


意匠図

器具品名	直管用専用器具 逆富士型110形1灯	保守率	
		良	0.69
器具品番	IRLDL111FJ	中	
		否	0.67
部品品名	-	否	
		0.63	
部品品番	-	器具効率	
		上方向	8%
器具光束	4127lm	下方向	
		全方向	84%
光源	LDRd86T-N/30/45/16S/R	光源光束	
		4500lm	92%


照明率表

作業面照度率(×0.01)																								
反射率	天井		80				70				50				30		0							
	壁		70	50	30	10	70	50	30	10	70	50	30	10	30	10	0							
	床		30	10	30	10	30	10	30	10	30	10	30	10	30	10	0							
室 指 数	0.4	43	41	29	28	22	21	17	42	39	29	28	21	21	17	27	26	21	20	16	20	16	14	
	0.6	59	55	44	42	35	34	29	57	53	43	41	35	34	28	41	39	33	32	28	32	31	27	24
	0.8	69	63	54	50	44	42	36	66	61	52	49	43	41	35	49	47	41	40	35	39	38	34	31
	1	78	70	62	58	52	50	43	74	67	61	57	51	49	43	57	54	49	47	42	46	45	40	37
	1.25	86	76	71	65	61	57	51	82	74	69	64	60	56	50	65	61	57	54	49	54	52	48	44
	1.5	91	80	77	70	67	62	56	87	78	75	68	65	61	55	70	65	62	59	54	59	57	52	48
	2	99	86	87	77	77	70	64	94	83	83	76	75	69	64	77	72	70	66	62	66	64	60	56
	2.5	104	90	93	83	85	76	71	99	87	90	81	82	75	70	83	77	77	72	68	72	69	65	61
	3	108	92	98	86	90	80	75	103	90	94	84	87	79	74	87	80	81	76	72	76	73	69	65
	4	113	96	105	90	97	86	81	107	93	100	88	94	84	80	92	84	87	81	77	81	78	75	70
	5	116	98	109	93	103	89	85	110	95	104	91	99	88	84	96	87	91	84	81	85	81	78	73
	7	120	100	114	97	109	94	91	114	98	109	95	105	92	89	100	91	97	88	86	89	85	83	78
	10	122	102	118	100	115	97	95	117	100	113	98	110	95	93	104	94	101	92	90	93	88	86	81

配光曲線

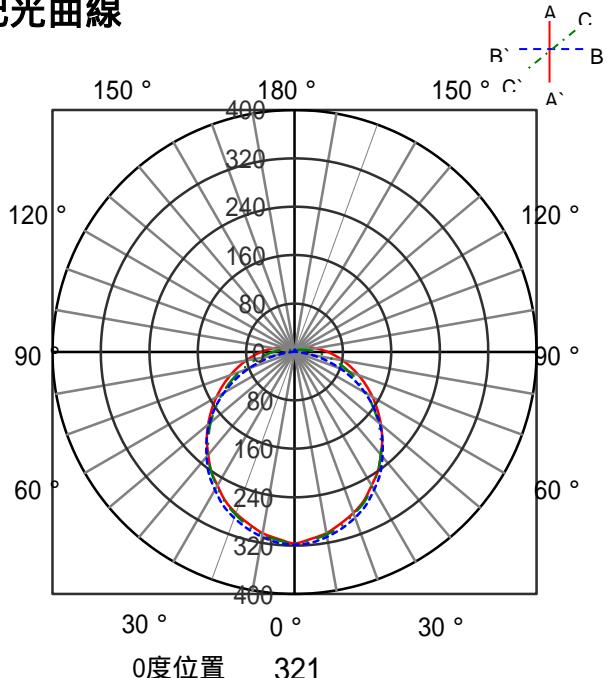


直射水平面照度

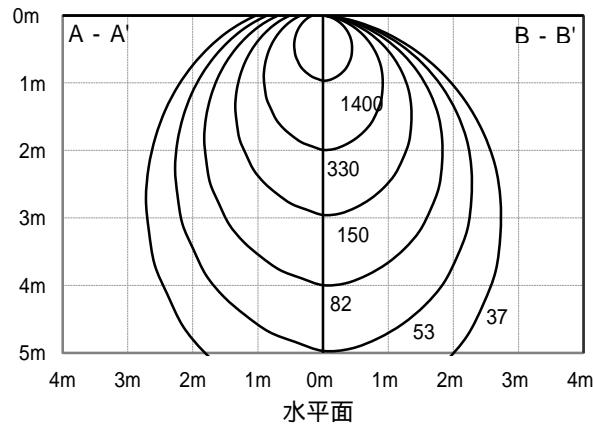

ECOHiLUX照明器具 配光データシート

意匠図


器具品名	直管用専用器具 トラフ型110形1灯	保守率	
		良	0.69
器具品番	IRLDL111TR	中	
		否	0.67
部品品名	-	否	
		0.63	
部品品番	-	器具効率	
		上方向	8%
器具光束	4140lm	下方向	84%
光源	LDRd86T-N/30/45/16S/R	全方向	92%
光源光束	4500lm		

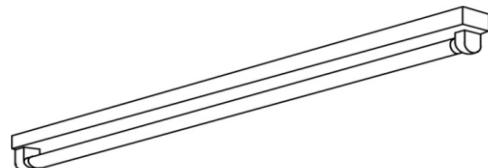


照度率表

作業面照度率(×0.01)															0									
反射率	天井	80				70				50				30			0							
		壁		70	50	30	10	70		50	30	10	50		30	10	0							
		床	壁	30	10	30	10	10	30	10	30	10	10	30	10	30	10							
室 指 数	0.4	42	40	29	28	21	21	16	41	38	28	27	21	21	16	27	26	20	20	16	19	19	15	13
	0.6	58	54	43	41	34	33	28	56	52	42	40	34	33	27	40	38	32	32	27	31	30	26	23
	0.8	68	62	53	49	43	41	35	65	60	51	48	42	40	34	48	46	40	39	34	38	37	33	30
	1	76	68	61	57	51	48	42	73	66	59	55	50	48	42	56	53	48	46	40	45	44	39	36
	1.25	84	75	70	64	60	56	50	81	72	68	63	58	55	49	63	60	55	53	48	53	51	47	43
	1.5	90	79	76	69	66	61	55	85	76	73	67	64	60	54	68	64	61	58	53	57	55	51	47
	2	97	85	85	76	76	69	63	93	82	82	74	73	68	62	76	71	69	65	60	65	63	58	54
	2.5	103	89	92	81	83	75	70	98	86	88	79	80	73	68	82	76	75	71	66	71	68	64	60
	3	106	91	97	85	88	79	74	101	89	93	83	85	77	73	85	79	80	74	70	75	71	68	63
	4	111	94	103	89	96	84	80	106	92	99	87	92	83	79	91	83	86	79	76	80	76	73	68
	5	114	97	107	92	101	88	84	109	94	103	90	97	86	83	94	86	90	83	80	84	79	77	72
	7	118	99	112	96	108	92	89	112	97	108	93	103	90	88	99	89	95	87	84	88	83	81	76
	10	121	101	117	98	113	96	94	115	99	111	96	108	94	92	102	92	99	90	88	92	87	85	80

配光曲線

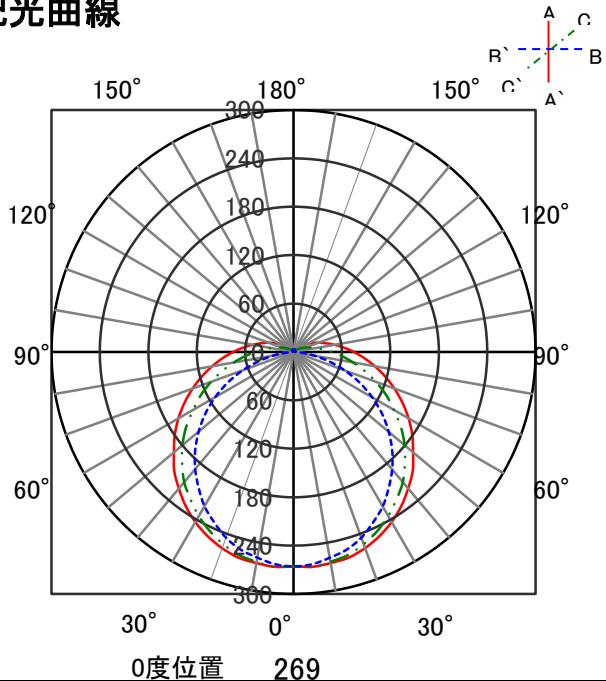


直射水平面照度

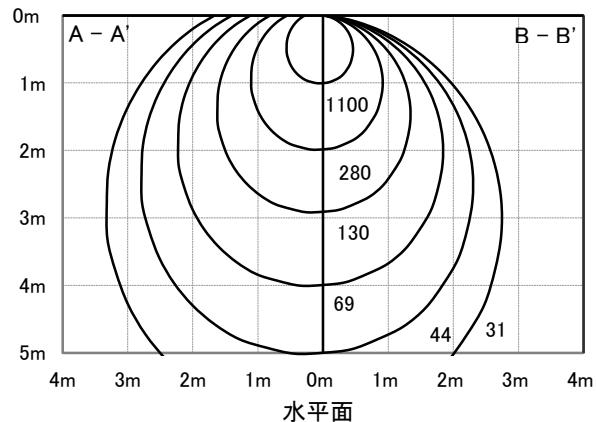

ECOHiLUX 照明器具 配光データシート

意匠図

器具品名	直管用専用器具 直付下面開放型110形1灯	保守率	
		良	0.69
器具品番	IRLDL111UK	中	
		否	0.67
部品品名	-	否	
		器具効率	
器具光束	4473lm	上方向	0%
		下方向	99%
光源	LDRd86T-N/30/45/16S/R	全方向	99%
光源光束	4500lm		

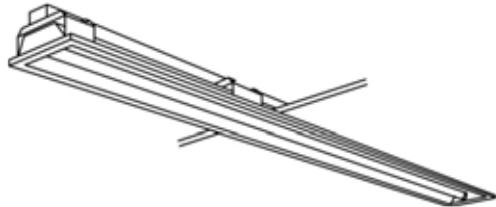


照度率表


作業面照度率(×0.01)

反射率	天井	80				70				50				30				
		壁		70	50	30	10	床		70	50	30	10	0.4		30	10	0
		30	10	30	10	30	10	30	10	30	10	30	10	15	25	19	19	15
室指數	0.4	39	37	27	26	20	19	15	38	36	26	25	20	19	15	25	19	19
	0.6	54	50	40	38	32	31	26	52	48	40	38	32	31	26	38	37	31
	0.8	63	57	49	46	40	39	33	61	56	48	45	40	38	33	46	44	39
	1	71	64	57	53	48	46	40	68	62	56	52	47	45	40	53	51	46
	1.25	78	69	66	60	56	53	47	75	68	64	59	55	52	47	61	57	54
	1.5	83	73	71	64	62	57	52	80	72	69	63	61	57	52	66	59	56
	2	90	78	80	71	71	65	60	87	77	77	70	70	64	59	73	68	63
	2.5	95	82	86	76	78	70	66	92	81	83	75	76	70	65	79	73	68
	3	98	84	90	79	83	74	70	95	83	87	78	81	73	69	82	76	77
	4	103	87	96	83	90	79	75	99	86	93	82	87	78	75	87	80	83
	5	106	89	100	86	95	82	79	102	88	96	85	92	81	78	90	82	87
	7	109	92	104	89	100	86	84	105	90	101	88	97	85	83	94	86	91
	10	112	93	108	91	105	89	87	107	92	104	90	102	88	87	97	88	95

配光曲線

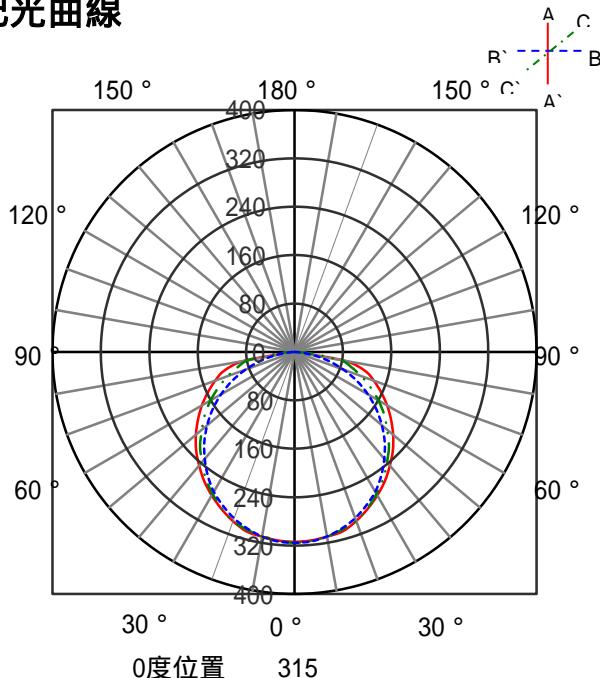


直射水平面照度

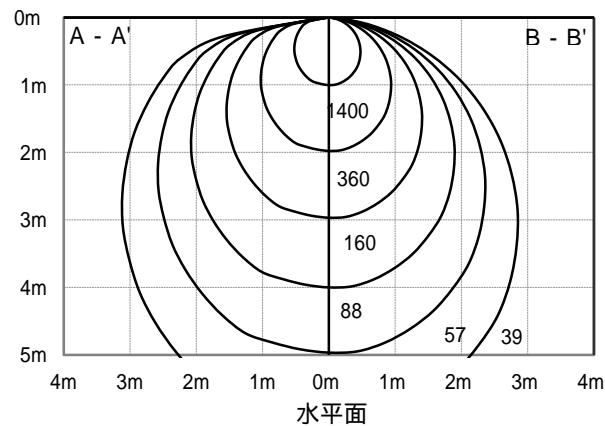

ECOHiLUX 照明器具 配光データシート

器具品名	直管用専用器具 直付下面開放型110形2灯	保守率	
		良	0.81
器具品番	IRLDL112CL	中	
		否	0.67
部品品名	-	器具効率	
		上方向	0%
部品品番	-	下方向	98%
		全方向	98%
器具光束	8798lm		
光源	LDRd86T-N/30/45/16S/R		
光源光束	4500lm × 2		


意匠図

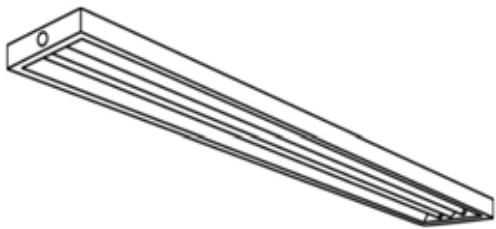


照度率表

反射率	天井	作業面照度率(×0.01)																	
		80				70				50				30				0	
		壁	70	50	30	10	70	50	30	10	50	30	10	30	10	10	30	10	0
	床	30	10	30	29	22	22	17	42	40	30	29	22	22	17	29	28	22	21
室 指 数	0.4	44	41	30	29	22	22	17	42	40	30	29	22	22	17	21	21	21	17
	0.6	60	55	45	43	36	35	30	58	54	45	42	36	35	30	43	41	35	34
	0.8	70	64	55	52	45	43	37	68	62	54	51	45	43	37	52	49	43	42
	1	79	71	64	59	54	51	45	76	69	63	58	53	51	45	60	57	52	50
	1.25	87	78	73	67	63	59	53	84	76	71	66	62	59	53	68	64	60	58
	1.5	93	82	79	72	69	64	58	89	80	77	71	68	64	58	73	69	66	63
	2	101	87	89	79	79	73	67	97	86	86	78	78	72	66	82	76	75	70
	2.5	106	91	96	85	87	79	73	102	90	93	83	85	78	73	88	81	81	76
	3	110	94	100	88	93	83	78	106	92	97	87	90	82	77	92	84	86	80
	4	114	97	107	92	100	88	84	110	96	103	91	97	87	83	97	89	92	85
	5	118	99	111	95	105	92	88	113	98	107	94	102	91	87	101	92	97	89
	7	121	102	116	99	112	96	93	117	100	112	98	108	95	92	105	95	102	93
	10	124	104	120	101	117	99	97	119	102	116	100	113	98	96	108	98	106	96

配光曲線

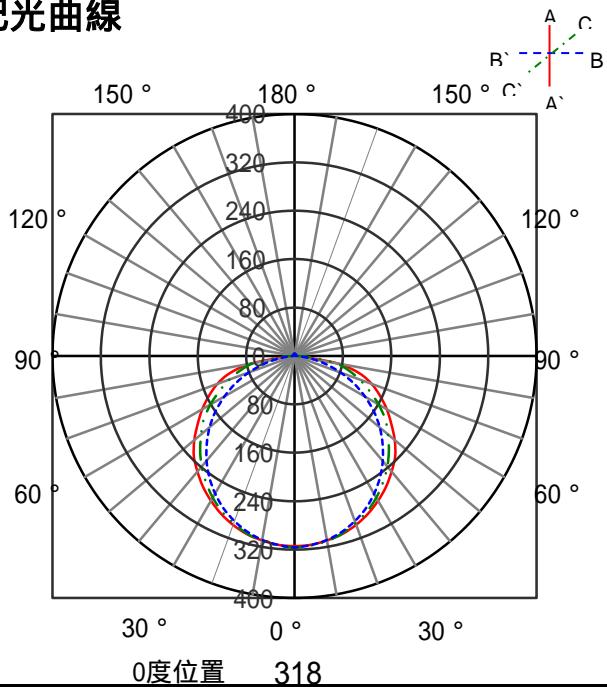

直射水平面照度

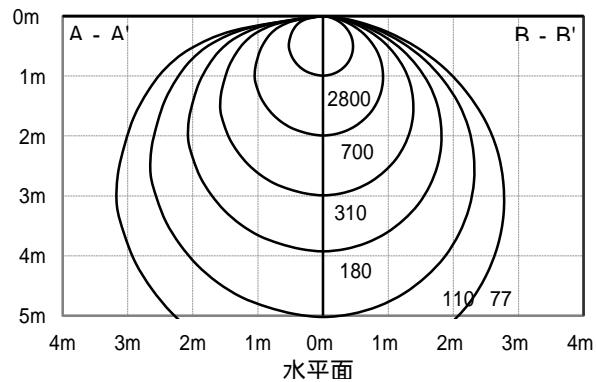

ECOHiLUX 照明器具 配光データシート

器具品名	直管用専用器具 逆富士型110形2灯	保守率	
		良	0.69
器具品番	IRLDL112FJ	中	
		否	0.67
部品品名	-	否	
		器具効率	
器具光束	8469lm	上方向	4%
		下方向	90%
光源	LDRd86T·N/30/45/16S/R	全方向	94%
光源光束	4500lm × 2		


意匠図




照度率表

作業面照度率(×0.01)																			
反射率	天井	80				70				50				30		0			
		壁	70	50	30	10	70	50	30	10	50	30	10	30	10	0			
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0			
0.4	42	39	29	28	21	21	17	40	38	28	27	21	21	27	26	20	16	14	
0.6	57	53	43	41	35	34	28	55	51	42	40	34	33	28	41	39	33	28	25
0.8	67	61	52	49	43	41	36	65	59	51	48	42	41	35	49	47	41	40	35
1	75	67	61	57	51	49	43	72	66	59	55	50	48	42	56	54	49	47	46
1.25	83	74	70	64	60	56	51	80	72	68	63	59	56	50	64	60	57	54	53
1.5	88	77	75	68	66	61	55	85	76	73	67	64	60	55	69	65	62	59	57
2	95	83	84	75	75	69	63	92	81	82	74	74	68	63	77	71	70	66	62
2.5	101	87	91	80	83	74	70	97	85	88	79	80	73	69	82	76	72	68	73
3	104	89	95	83	88	78	74	100	87	92	82	85	77	73	86	79	81	75	71
4	108	92	101	88	95	83	79	104	90	98	86	92	82	79	91	83	86	80	77
5	111	94	105	90	100	87	83	107	92	101	89	96	85	82	94	86	90	83	80
7	115	96	110	94	106	91	88	110	95	106	92	102	89	87	98	89	95	87	85
10	117	98	114	96	111	94	92	113	97	109	95	107	93	91	101	92	99	90	88

配光曲線

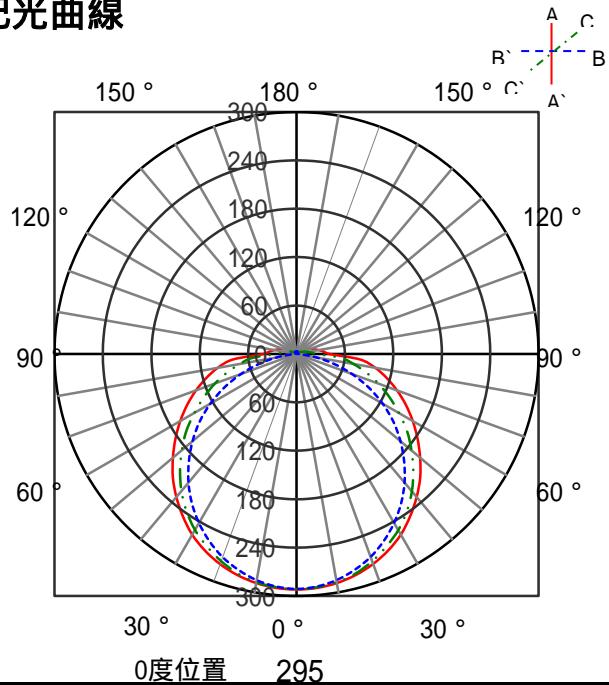


直射水平面照度

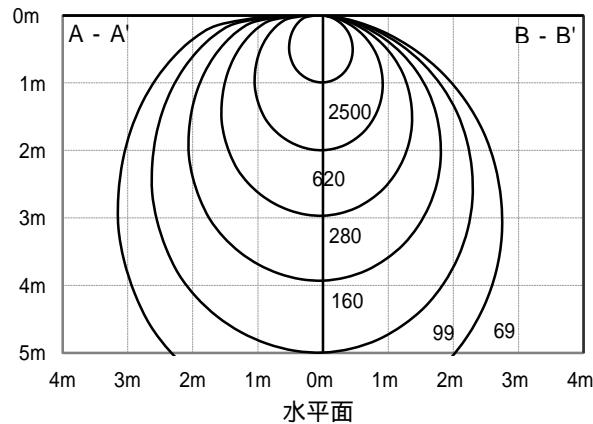

ECOHiLUX照明器具 配光データシート

器具品名	直管用専用器具 トラフ型110形2灯	保守率	
		良	0.69
器具品番	IRLDL112TR	中	
		否	0.67
部品品名	-	否	
		0.63	
部品品番	-	器具効率	
		上方向	0%
器具光束	8280lm	下方向	92%
光源	LDRd86T-N/30/45/16S/R	全方向	92%
光源光束	4500lm × 2		

意匠図

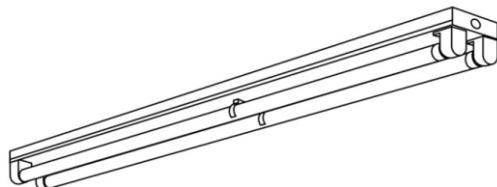


照度率表


作業面照度率(×0.01)

反射率	天井	80				70				50				30				0			
		壁		70	50	30	10	70		50	30	10	50		30	10	30		10	0	
		床		30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10		
室 指 数	0.4	46	43	31	30	23	23	18	45	42	31	30	23	22	18	30	29	22	22	17	16
	0.6	63	58	47	45	37	36	30	61	57	46	44	37	36	30	45	43	36	35	30	28
	0.8	74	67	57	54	47	45	38	71	65	56	53	46	44	38	54	51	45	44	38	35
	1	83	74	67	62	56	53	46	80	72	65	61	55	52	46	62	59	53	51	46	42
	1.25	92	81	76	70	65	61	55	88	79	74	69	64	61	54	71	67	62	60	54	51
	1.5	97	86	83	75	72	67	60	94	84	80	74	71	66	60	76	72	68	65	59	66
	2	106	92	93	83	83	75	69	102	90	90	82	81	75	69	85	79	77	73	68	74
	2.5	111	96	100	88	91	82	76	107	94	97	87	88	81	75	91	84	84	79	74	70
	3	115	99	105	92	96	86	81	111	97	102	91	94	85	80	96	88	89	83	79	85
	4	120	102	112	97	104	92	87	116	101	108	95	101	91	86	101	93	96	89	85	91
	5	124	105	116	100	110	96	92	119	103	112	99	107	95	91	105	96	101	92	89	95
	7	128	107	122	104	117	100	97	123	106	118	102	113	99	96	110	100	106	97	94	100
	10	131	109	127	107	123	104	102	126	108	122	105	118	103	101	114	103	111	101	99	104

配光曲線

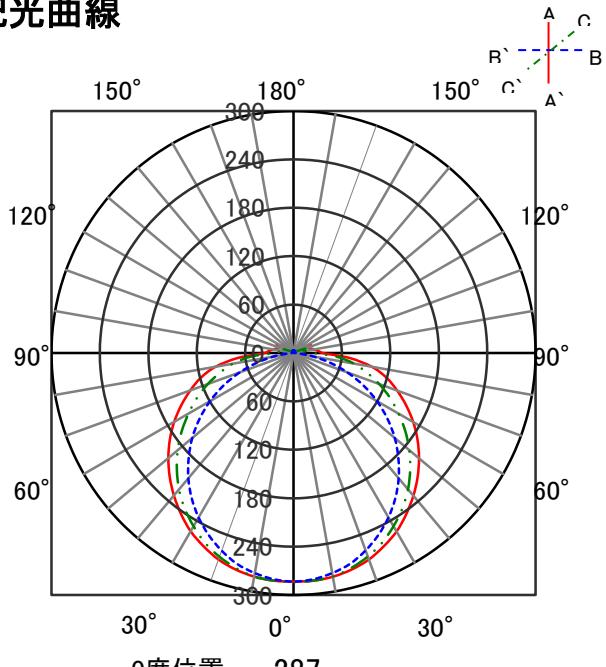


直射水平面照度

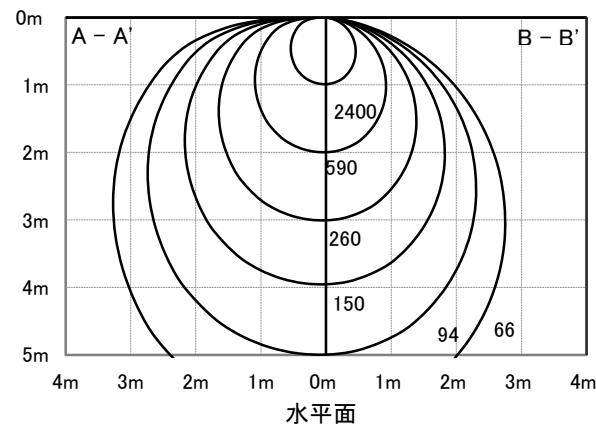

ECOHiLUX 照明器具 配光データシート

器具品名	直管用専用器具 直付下面開放型110形2灯	保守率	
		良	0.69
器具品番	IRLDFL42UK-VT1	中	
		否	0.67
部品品名	-	否	
		器具効率	
器具光束	8613lm	上方向	0%
		下方向	96%
光源	LDRd86T・N/30/45/16S/R	全方向	96%
光源光束	4500lm × 2		

意匠図

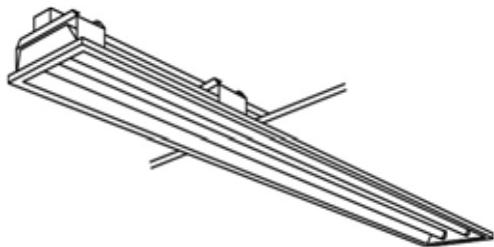


照度率表

作業面照度率(×0.01)

反射率	天井	80				70				50				30				0			
		壁		70	50	30	10	壁		70	50	30	10	壁		50	30	10	0		
		床		30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0	
室 指 数	0.4	42	40	29	28	21	21	16	41	39	28	27	21	21	16	27	27	21	20	16	15
	0.6	58	53	43	41	35	34	28	56	52	43	41	34	33	28	41	40	34	33	28	26
	0.8	68	62	53	50	43	41	35	66	60	52	49	43	41	35	50	47	42	40	35	33
	1	76	68	62	57	52	49	43	74	67	60	56	51	48	43	57	54	49	48	42	40
	1.25	84	75	70	65	61	57	51	81	73	69	64	60	56	50	66	62	58	55	50	47
	1.5	89	79	76	69	66	62	56	86	77	74	68	65	61	55	71	66	63	60	55	54
	2	97	85	86	76	76	70	64	94	83	83	75	75	69	64	79	73	72	68	63	60
	2.5	103	88	92	82	84	76	70	99	87	90	80	82	75	70	85	78	78	73	69	65
	3	106	91	97	85	89	79	75	102	89	94	84	87	79	74	88	81	83	77	73	75
	4	111	94	103	89	97	85	81	107	93	100	88	94	84	80	94	86	89	82	79	84
	5	114	96	107	92	102	88	85	110	95	104	91	99	87	84	97	89	93	86	83	84
	7	118	99	113	96	108	93	90	113	97	109	94	105	92	89	102	92	98	90	88	93
	10	120	101	117	98	113	96	94	116	99	112	97	109	95	93	105	95	102	93	91	90

配光曲線

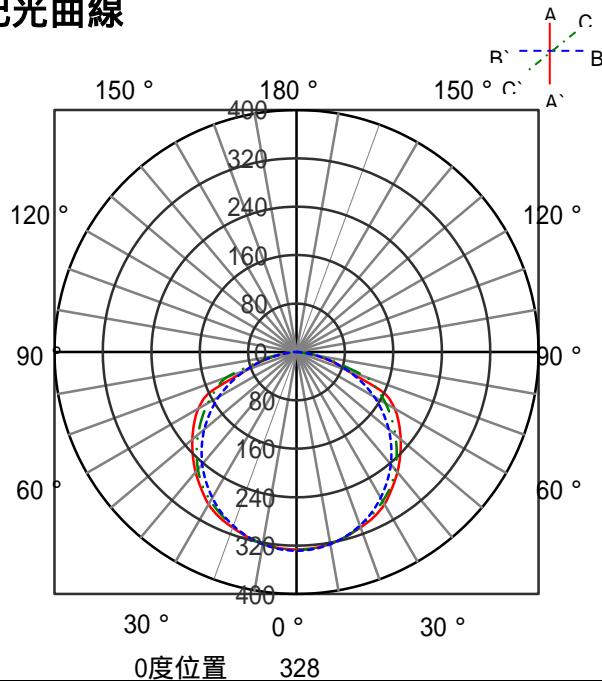

直射水平面照度

