


ECOHiLUX照明器具 配光データシート

意匠図

器具品名	S-triaCOBスポットライト 12灯 シャインカラー	保守率	
器具品番	SP12WW-50SCW-CC	良	0.69
部品品名	-	中	0.67
部品品番	-	否	0.63
器具光束	1612lm	器具効率	
光源	-	上方向	0%
光源光束	一体型器具のため、器具光束表示	下方向	100%
		全方向	100%

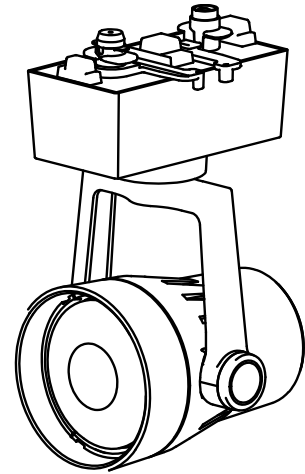


照明率表

作業面照明率(×0.01)

反射率	天井								壁								床							
	80				70				50				30				0							
壁	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10
0.4	61	57	50	48	43	43	39	60	56	49	48	43	42	39	48	47	43	42	39	43	42	39	38	
0.6	79	73	68	64	61	59	55	78	72	67	64	61	59	55	66	63	60	58	55	59	58	55	54	
0.8	89	81	78	74	71	68	65	88	80	77	73	71	68	65	75	72	70	68	64	69	67	64	62	
1	96	86	86	80	79	75	71	94	85	84	79	78	74	71	82	78	76	74	70	75	73	70	68	
1.25	102	91	93	85	86	80	77	100	90	91	84	85	80	77	88	83	83	79	76	81	78	76	74	
1.5	106	94	97	88	91	84	81	104	93	95	88	89	84	80	92	86	87	83	80	84	82	79	77	
2	112	97	104	93	98	89	86	109	96	102	92	96	89	86	97	90	93	88	85	90	86	84	82	
2.5	116	100	109	96	103	93	90	112	99	106	95	101	92	90	101	93	97	91	89	93	90	88	86	
3	118	101	112	98	107	95	93	114	100	109	97	104	95	92	104	95	100	93	91	96	92	90	88	
4	121	103	117	101	112	99	97	117	102	113	100	109	98	96	107	98	104	96	95	100	95	94	91	
5	123	105	120	103	116	101	99	119	103	116	102	113	100	99	109	100	107	98	97	102	97	96	93	
7	126	106	123	105	120	104	102	122	105	119	104	117	103	102	112	102	110	101	100	105	99	98	96	
10	128	107	126	106	124	106	105	123	106	122	105	120	105	104	114	103	113	103	102	107	101	100	98	

配光曲線

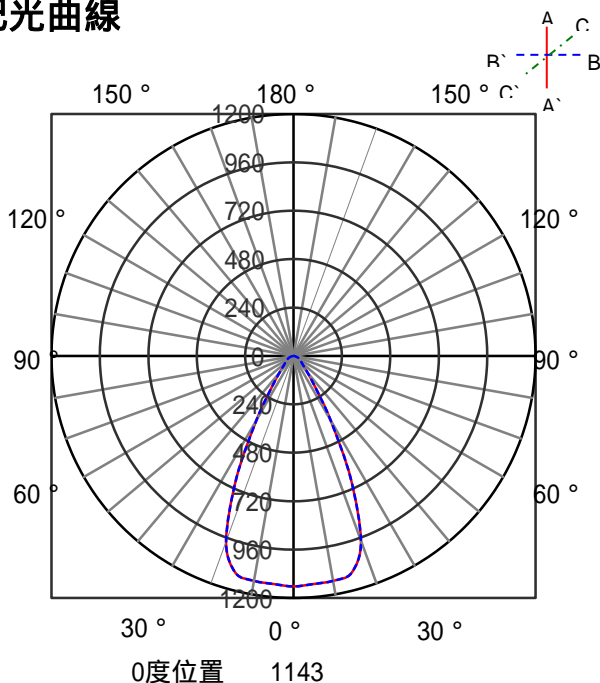

直射水平面照度

