

## ECOHiLUX 照明器具 配光データシート

## 意匠図


器具品名	直管用専用器具	保守率	
		良	0.81
セット品番	-	中	
部品品名	直付下面開放型	否	
部品品番	IRLDL41CL	器具効率	
器具光束	3020lm	上方向	2%
光源	LXR40・N / 22 / 33 / R	下方向	90%
光源光束	3300lm	全方向	92%




## 照明率表

作業面照明率(×0.01)																			
反射率	天井	80				70				50				30				0	
		壁	70	50	30	10	70	50	30	10	50	30	10	30	10	10	30	10	0
室 指 数	壁	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	30	10	0
	床	45	42	31	30	24	23	19	44	41	31	30	23	23	19	30	29	23	18
	0.4	45	42	31	30	24	23	19	44	41	31	30	23	23	19	30	29	23	18
	0.6	62	57	47	45	38	37	31	60	55	46	44	37	36	31	44	43	37	36
	0.8	72	65	57	53	47	45	39	69	63	55	52	46	44	39	53	50	45	43
	1	80	72	66	61	55	53	47	77	70	64	60	55	52	46	61	58	53	51
	1.25	89	79	75	69	65	61	55	85	77	73	67	64	60	54	69	65	61	59
	1.5	94	83	81	73	71	66	60	90	81	78	72	69	65	59	74	70	67	64
	2	102	89	90	80	81	74	68	98	87	87	79	79	73	68	82	77	75	71
	2.5	107	92	97	86	88	80	75	103	91	94	84	86	79	74	88	82	77	73
指 数	3	111	95	101	89	94	84	79	106	93	98	87	91	82	78	92	85	80	77
	4	115	98	108	93	101	89	85	111	96	104	92	98	88	84	97	89	92	85
	5	118	100	112	96	106	92	89	114	98	108	95	103	91	88	101	92	97	89
	7	122	103	117	99	112	97	94	117	101	113	98	109	95	93	105	95	102	93
	10	125	104	121	102	118	100	98	120	103	116	101	113	99	97	108	98	106	96

## 配光曲線

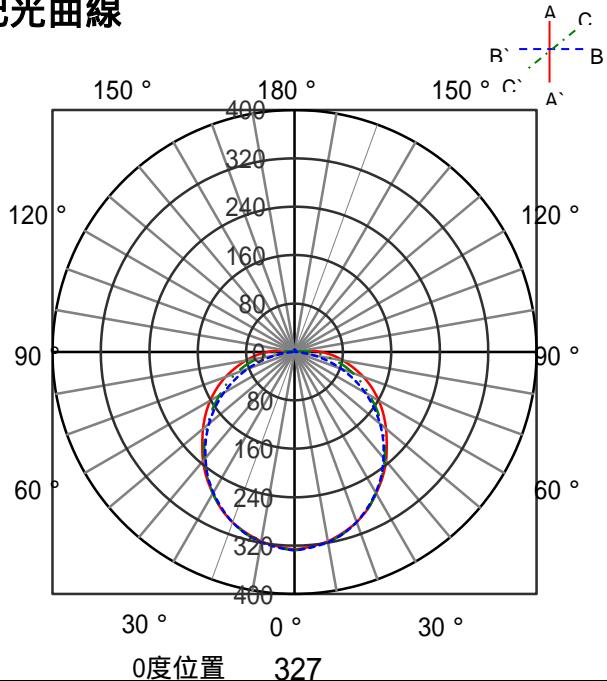

## 直射水平面照度

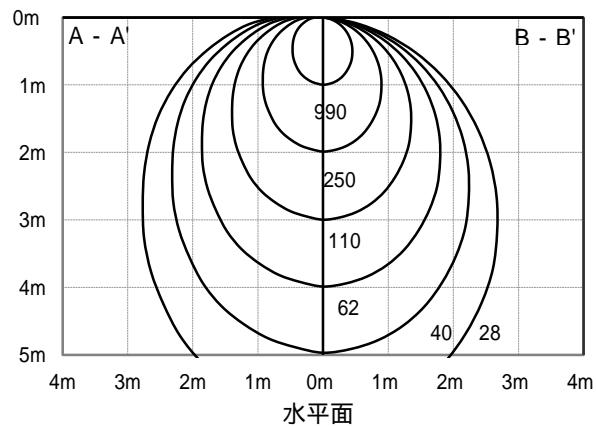

## ECOHiLUX照明器具 配光データシート


## 意匠図

器具品名	直管用専用器具	保守率	
		良	0.81
セット品番	-	中	
部品品名	逆富士型	否	
部品品番	IRLDL41FJ	器具効率	
器具光束	3231lm	上方向	13%
光源	LXR40-N/22/33/R	下方向	85%
光源光束	3300lm	全方向	98%


## 照明率表

反射率	天井	作業面照明率(×0.01)												30	
		80				70				50				30	
		壁	70	50	30	10	70	50	30	10	50	30	10	30	10
	壁	30	10	30	10	30	10	30	10	30	10	30	10	30	10
	床	0.4	44	42	30	29	23	22	18	43	40	30	29	22	22
		0.6	61	56	45	43	36	35	29	58	54	44	42	35	34
		0.8	71	64	55	52	45	43	37	67	62	53	50	44	42
		1	79	71	64	59	54	51	44	76	69	62	58	52	50
		1.25	88	78	73	67	63	59	52	83	75	70	65	61	57
		1.5	93	82	79	72	69	64	58	88	79	76	70	67	62
		2	101	88	89	79	79	72	66	96	85	85	77	76	70
		2.5	107	92	96	85	87	78	73	101	89	91	82	83	76
		3	110	95	100	88	92	82	77	105	91	96	85	88	80
		4	115	98	107	93	100	88	83	109	95	102	90	96	86
		5	118	100	111	96	105	91	88	112	97	106	93	101	89
		7	122	103	117	99	112	96	93	116	100	111	97	107	94
		10	125	105	121	102	117	100	97	119	102	115	99	112	97

## 配光曲線

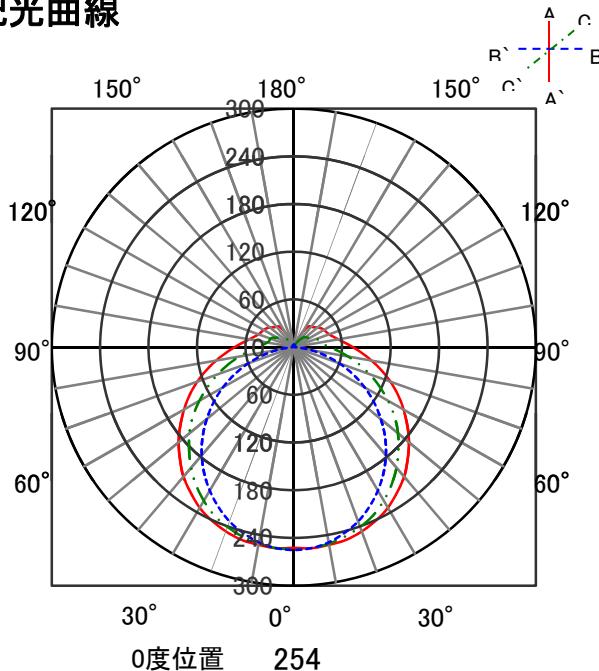


## 直射水平面照度

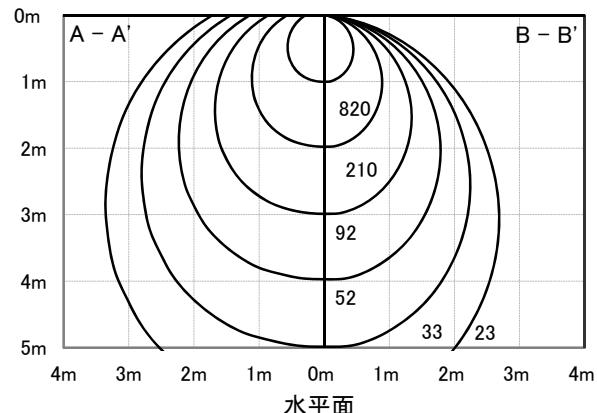

## ECOHiLUX 照明器具 配光データシート

## 意匠図


器具品名	直管用専用器具	保守率	
		良	0.81
セット品番	-	中	
器具品名	トラフ型	否	
器具品番	IRLDL41TR	器具効率	
器具光束	3159lm	上方向	13%
光源	LXR40・N / 22 / 33 / R	下方向	83%
光源光束	3300lm	全方向	96%

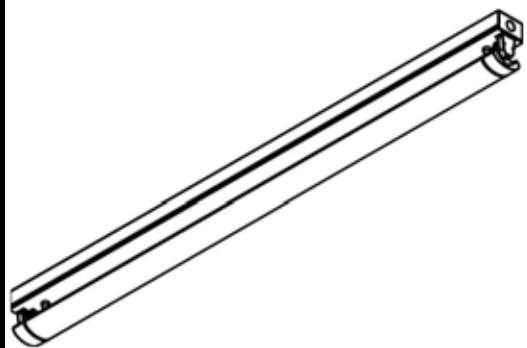


## 照明率表

作業面照明率(×0.01)																
反射率	天井	80				70				50				30		0
		70	50	30	10	70	50	30	10	50	30	10	30	10	30	10
	壁	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0
	床	45	43	31	30	24	23	19	43	41	30	29	23	18	29	28
0.4	45	43	31	30	24	23	19	43	41	30	29	23	18	29	28	22
0.6	62	57	47	44	37	36	31	59	55	45	43	37	35	30	42	41
0.8	72	66	56	53	46	44	38	69	63	54	51	45	43	38	51	48
1	81	73	65	61	55	52	46	77	70	63	59	53	51	45	58	55
1.25	89	79	75	68	64	60	54	85	76	72	66	62	59	53	66	59
1.5	94	83	81	73	70	65	59	90	80	77	71	68	64	58	71	67
2	102	89	90	81	81	74	68	97	86	86	78	78	72	66	79	72
2.5	108	93	97	86	88	80	74	102	90	93	83	85	78	73	85	79
3	112	96	102	89	94	84	79	106	93	97	87	90	81	77	89	82
4	117	99	108	94	101	89	85	110	96	103	91	97	87	83	94	86
5	120	101	113	97	107	93	89	113	98	107	94	102	90	87	98	89
7	123	104	118	100	113	97	94	117	101	112	98	108	95	92	102	92
10	126	106	122	103	119	101	99	120	103	116	100	113	98	96	105	95

## 配光曲線

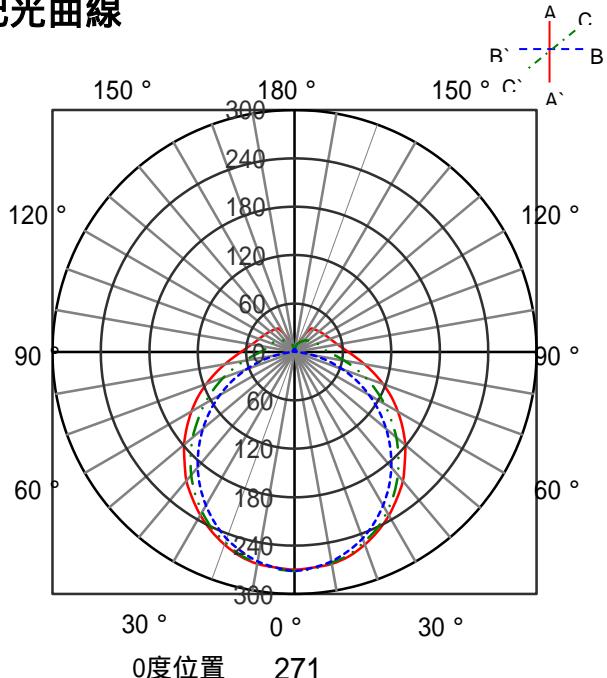


## 直射水平面照度

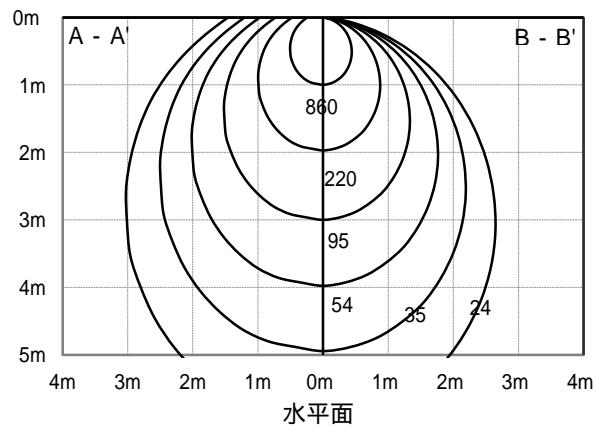

## ECOHiLUX照明器具 配光データシート

## 意匠図

器具品名	直管用専用器具	保守率	
		良	0.81
器具品番	-	中	
部品品名	埋込下面開放型		0.77
部品品番	IRLDL41UK		否 0.67
器具効率		器具効率	
器具光束	3135lm	上方向	0%
光源	LXR40-N/22/33/R	下方向	95%
光源光束	3300lm	全方向	95%

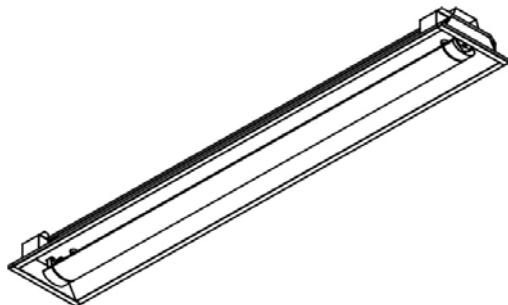


## 照明率表


## 作業面照明率(×0.01)

反射率	天井	80				70				50				30				0			
		壁		70	50	30	10	壁		70	50	30	10	壁		50	30	10	壁		
		床		30	10	30	10	床		30	10	30	10	床		30	10	10	床		
室 指 数	0.4	45	42	31	30	23	23	18	43	41	30	29	23	18	30	29	23	22	18	16	
	0.6	61	56	47	44	38	36	31	59	55	46	44	37	36	31	44	42	36	36	31	29
	0.8	71	65	56	53	46	45	39	69	63	55	52	46	44	38	53	50	45	43	38	36
	1	80	72	65	61	55	52	46	77	70	64	60	54	52	46	61	58	53	51	46	43
	1.25	88	78	74	68	64	61	54	85	77	73	67	63	60	54	69	65	61	59	54	51
	1.5	94	82	80	73	71	66	60	90	81	78	72	69	65	59	74	70	67	64	59	55
	2	101	88	90	80	81	74	68	98	86	87	79	79	73	68	83	77	76	71	67	73
	2.5	107	92	97	85	88	79	74	103	90	94	84	86	79	74	88	82	82	77	73	79
	3	110	95	101	89	93	83	79	106	93	98	87	91	82	78	92	85	87	81	77	83
	4	115	98	107	93	101	89	85	111	96	104	92	98	88	84	98	89	93	86	83	88
	5	118	100	112	96	106	92	89	114	98	108	95	103	91	88	101	92	97	89	87	92
	7	122	102	117	99	112	96	94	117	101	113	98	109	95	93	105	96	102	93	91	89
	10	124	104	121	102	117	100	98	120	103	116	101	113	99	97	109	98	106	96	95	100

## 配光曲線

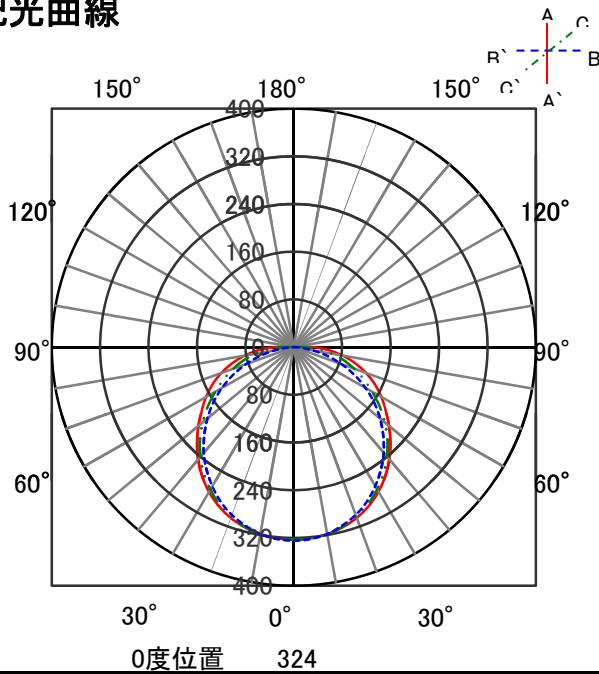


## 直射水平面照度

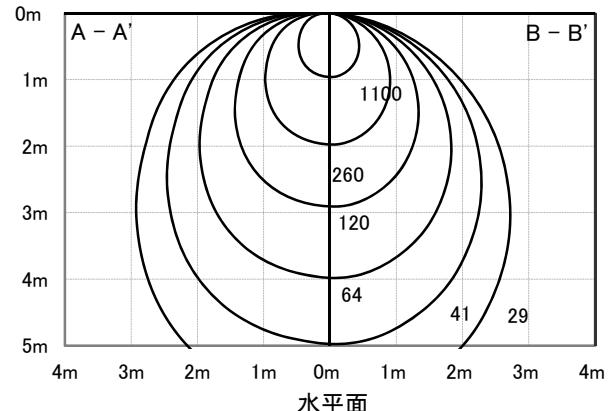

## ECOHiLUX 照明器具 配光データシート

## 意匠図


器具品名	直管用専用器具	保守率	
		良	0.81
セット品番	-	中	
部品品名	直付下面開放型	否	
部品品番	IRLDL42CL	器具効率	
器具光束	5940lm	上方向	2%
光源	LXR40-N / 22 / 33 / R	下方向	88%
光源光束	3300lm × 2	全方向	90%

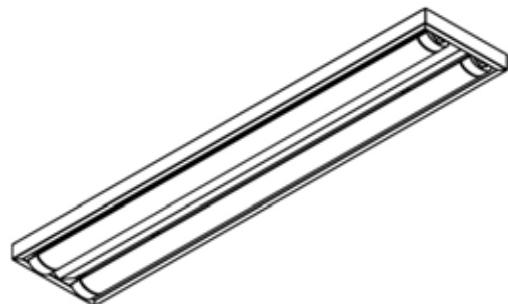


## 照明率表

反射率	天井	作業面照明率(×0.01)														0		
		80		70		50		30		10		50		30				
		壁	70	50	30	10	70	50	30	10	30	10	30	10	30	10	0	
室指數	壁	30	10	30	10	30	10	10	30	10	30	10	10	30	10	10	0	
	床	45	42	31	30	23	23	18	43	41	30	29	23	18	29	29	22	18
	0.4	61	57	47	44	38	36	31	60	55	46	44	37	36	31	44	42	36
	0.6	72	65	56	53	46	45	39	69	63	55	52	46	44	38	53	50	43
	0.8	80	72	65	61	55	52	46	77	70	64	60	54	52	46	61	58	51
	1	89	79	75	68	65	61	55	85	77	73	67	63	60	54	69	65	61
	1.25	94	83	81	73	71	66	60	90	81	78	72	69	65	59	74	70	67
	1.5	102	89	90	81	81	74	68	98	87	87	79	73	68	82	77	76	71
	2	107	93	97	86	88	80	75	103	91	94	84	86	79	74	88	82	77
	2.5	111	95	102	89	94	84	79	107	93	98	88	91	83	78	92	85	81
	3	116	98	108	93	101	89	85	111	97	104	92	98	88	84	98	89	86
	4	119	100	112	96	106	93	89	114	99	108	95	103	91	88	101	92	87
	5	122	103	117	100	113	97	94	117	101	113	98	109	96	93	105	96	102
	7	125	105	121	102	118	100	98	120	103	117	101	114	99	97	109	98	106
	10	125	105	121	102	118	100	98	120	103	117	101	114	99	97	109	98	106

## 配光曲線

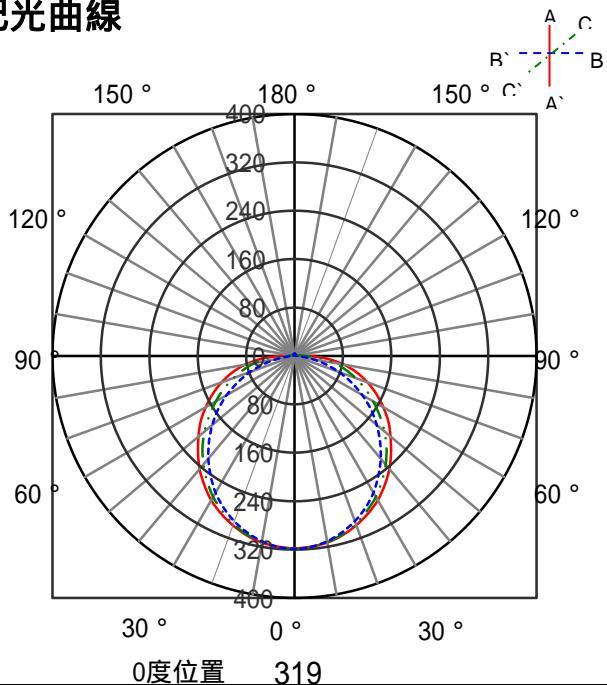


## 直射水平面照度

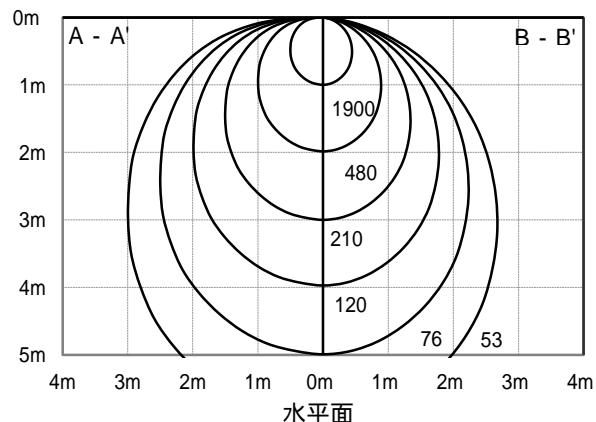

## ECOHiLUX 照明器具 配光データシート

## 意匠図


器具品名	直管用専用器具	保守率		
		良	0.81	
セット品番	IRLDL42FJ		中 0.77	
部品品名	逆富士型		否 0.67	
部品品番	IRLDL42FJ		器具効率	
器具光束	6132lm		上方向 8%	
光源	LXR40-N / 22 / 33 / R		下方向 85%	
光源光束	3300lm × 2		全方向 93%	

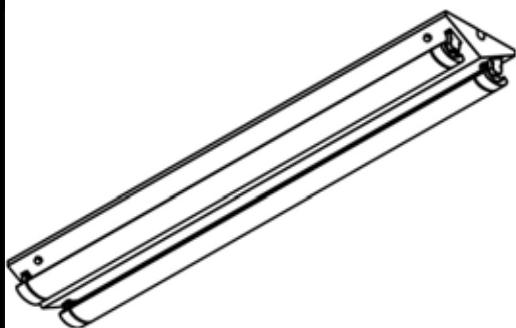


## 照明率表

作業面照明率(×0.01)																								
反射率	天井	80				70				50				30				0						
	壁	70	50	30	10	70	50	30	10	50	30	10	30	10	10	30	10	0						
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	10	30	10						
室 指 数	0.4	45	43	31	30	24	23	19	44	41	31	30	23	18	29	28	23	22	18	15				
	0.6	62	57	47	45	38	37	31	60	55	46	44	37	36	31	43	42	36	35	30	29	27		
	0.8	72	66	57	53	47	45	39	69	63	55	52	46	44	38	52	50	44	43	37	42	41	36	33
	1	81	73	66	61	56	53	46	77	70	64	60	54	52	46	60	57	52	50	45	50	48	44	40
	1.25	89	79	75	69	65	61	55	85	77	73	67	63	60	54	68	64	60	58	53	57	56	51	48
	1.5	95	83	81	74	71	66	60	90	81	78	72	69	65	59	73	69	66	62	57	62	60	56	52
	2	102	89	91	81	81	74	68	98	87	87	79	73	67	81	75	74	70	65	70	67	63	59	
	2.5	108	93	97	86	89	80	75	103	91	94	84	86	79	74	87	80	81	76	71	76	73	69	65
	3	112	96	102	89	94	84	79	106	93	98	87	91	82	78	91	84	85	79	75	80	76	73	68
	4	116	99	109	94	102	89	85	111	97	104	92	98	88	84	96	88	91	84	81	85	81	78	74
	5	120	101	113	97	107	93	90	114	99	108	95	103	91	88	100	91	95	88	85	89	84	82	77
	7	123	104	118	100	113	97	95	117	101	113	98	109	95	93	104	94	100	92	90	93	88	86	81
	10	126	105	122	103	119	101	99	120	103	117	101	114	99	97	107	97	105	95	93	97	91	90	85

## 配光曲線

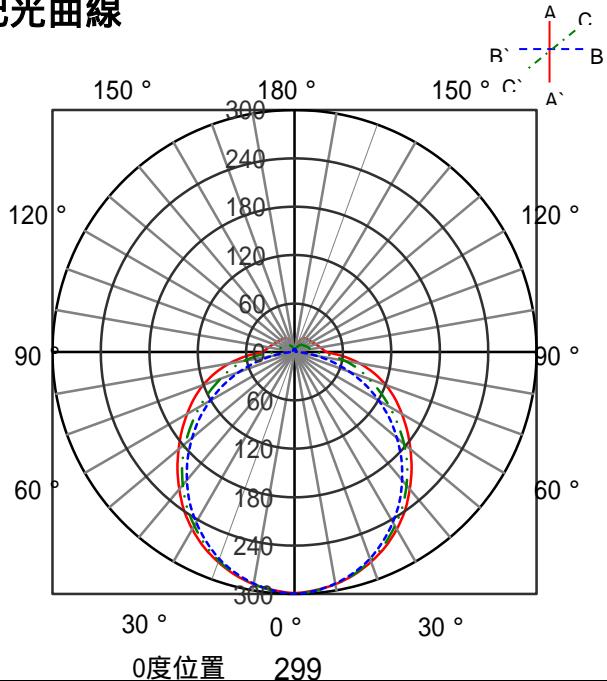


## 直射水平面照度

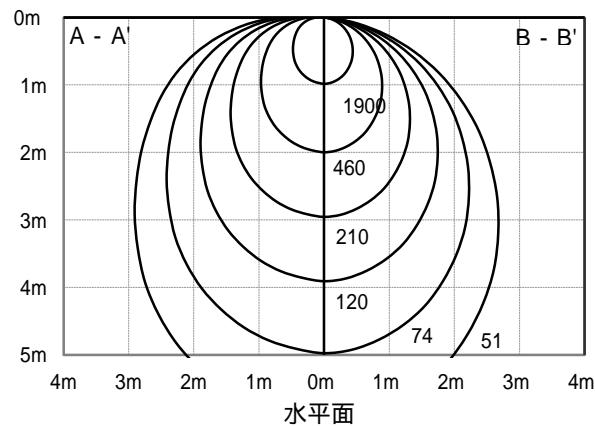

## ECOHiLUX照明器具 配光データシート

器具品名	直管用専用器具	保守率	
		良	0.81
器具品番	-	中	
部品品名	埋込下面開放型		0.77
部品品番	IRLDL42UK		否 0.67
器具効率		器具効率	
器具光束	6042lm	上方向	0%
光源	LXR40-N/22/33/R	下方向	92%
光源光束	3300lm × 2	全方向	92%


## 意匠図

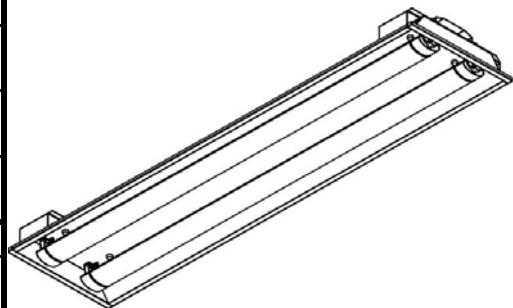

## 照明率表

作業面照明率(×0.01)																0								
反 射 率	天井	80				70				50				30										
	壁	70	50	30	10	70	50	30	10	50	30	10	30	10	10	0								
	床	30	10	30	10	30	10	30	10	30	10	10	30	10	10	0								
室 指 数	0.4	45	42	31	30	24	23	19	44	41	31	30	24	23	19	23	19	17						
	0.6	62	57	47	45	38	37	32	60	56	46	44	38	37	32	45	37	36	31	29				
	0.8	72	66	57	54	47	45	40	70	64	56	53	47	45	39	54	51	46	44	39	37			
	1	81	73	66	62	56	54	48	78	71	65	61	56	53	47	62	59	54	52	47	44			
	1.25	89	79	76	70	66	62	56	86	78	74	69	65	61	56	71	67	63	60	55	53			
	1.5	95	83	82	74	72	67	61	91	82	80	73	71	67	61	76	71	69	65	60	57			
	2	103	89	91	82	82	75	70	99	88	89	81	75	70	84	78	78	73	69	75	72	66		
	2.5	108	93	98	87	90	81	77	104	92	95	86	88	81	76	90	84	84	79	75	81	78	72	
	3	112	96	103	90	95	85	81	108	94	100	89	93	84	80	94	87	89	83	79	85	81	78	76
	4	116	99	109	95	103	91	87	112	97	106	93	100	90	86	100	91	95	88	85	90	86	84	81
	5	119	101	113	97	108	94	91	115	99	110	96	105	93	90	103	94	99	91	89	94	89	87	85
	7	123	103	118	101	114	98	96	118	102	114	99	111	97	95	107	97	104	95	93	98	93	92	89
	10	125	105	122	103	119	101	99	121	104	118	102	115	100	99	110	100	108	98	97	102	96	95	92

## 配光曲線

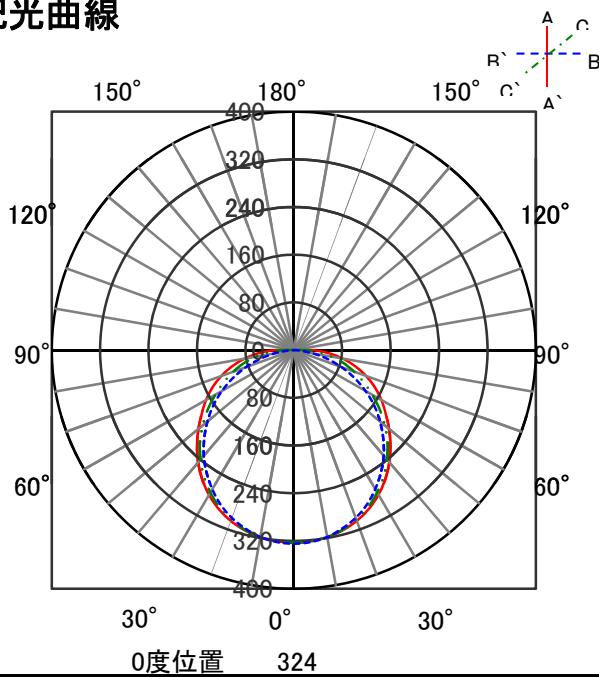

## 直射水平面照度

