


## ECOHiLUX照明器具 配光データシート

器具品名	バラストレス水銀灯代替	保守率	
器具品番	LDR100-200V25N7-H/E39-40BK2	良	0.69
部品品名	-	中	
部品品番	-	否	0.63
器具光束	4000lm	器具効率	
光源	LED	上方向	4%
光源光束	一体型器具のため、器具光束表示	下方向	96%
		全方向	100%


## 意匠図

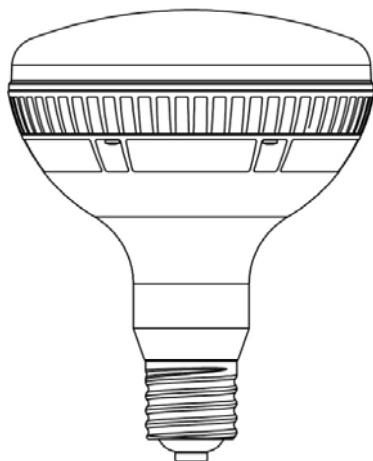

## 照明率表

作業面照度率(×0.01)																0		
反射率	天井		80				70				50				30			
	壁		70		50		30		10		70		50		30		0	
	床	壁	30	10	30	10	30	10	10	30	10	30	10	10	30	10	0	
室 指 数	0.4	45	43	32	31	25	24	20	44	42	31	30	24	24	20	23	19	17
	0.6	63	58	48	46	39	38	33	61	56	47	45	39	38	33	45	44	38
	0.8	73	66	58	54	48	46	41	70	64	57	53	48	46	40	54	52	46
	1	81	73	67	62	57	54	49	78	71	65	61	56	54	48	62	59	55
	1.25	90	80	76	70	67	63	57	86	78	74	69	66	62	57	71	63	61
	1.5	95	83	82	75	73	68	62	91	82	80	73	71	67	61	76	71	68
	2	102	89	91	82	83	75	70	98	87	89	80	81	74	70	84	78	77
	2.5	108	93	98	87	90	81	76	103	91	95	85	88	80	76	89	83	78
	3	111	95	102	90	95	85	80	107	93	99	88	92	84	80	93	85	82
	4	115	98	108	94	102	90	86	111	96	105	92	99	89	85	98	90	86
	5	118	100	112	96	107	93	90	114	98	108	95	103	92	89	101	92	89
	7	122	102	117	100	113	97	94	117	101	113	98	109	96	93	105	95	102
	10	124	104	121	102	118	100	98	119	102	116	100	113	99	97	108	98	106

## 配光曲線

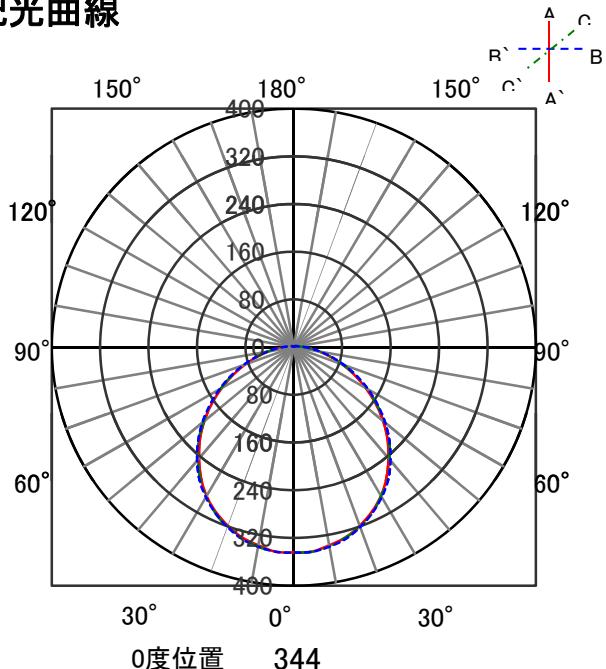

## 直射水平面照度

