


# ECOHiLUX照明器具 配光データシート

意匠図

器具品名	冷ケース照明 T6	保守率	
器具品番	LD10T6・D/RC	良	0.69
部品品名	-	中	0.67
部品品番	-	否	0.63
器具光束	330lm	器具効率	
光源	LED	上方向	12%
光源光束	330lm	下方向	88%
		全方向	100%

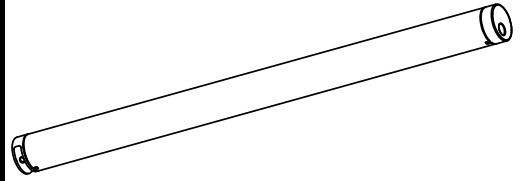


## 照明率表

作業面照明率(×0.01)

反射率	天井	80								70								50				30				0	
		壁	70		50		30		10		70		50		30		10		50		30		10		0		
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	10	30	10	0	0
室 指 数	0.4	42	39	28	27	21	21	16	40	38	28	27	20	20	16	26	25	19	19	15	18	18	14	14	12	12	
	0.6	57	53	42	40	33	32	27	54	51	41	39	32	31	26	38	37	31	30	25	29	29	24	24	21	21	
	0.8	67	61	51	48	41	40	34	64	58	50	47	40	39	33	46	44	38	37	32	36	35	31	31	27	27	
	1	75	67	60	55	49	47	41	71	65	58	54	48	46	40	53	51	45	44	38	43	42	37	37	33	33	
	1.25	83	74	68	63	58	54	48	79	71	66	61	56	53	47	61	57	53	51	45	50	48	44	44	39	39	
	1.5	88	78	74	67	64	59	53	83	75	71	65	62	58	52	66	61	58	55	50	54	52	48	48	43	43	
	2	96	83	83	75	74	67	61	91	80	80	72	71	66	60	73	68	66	62	58	62	59	55	55	50	50	
	2.5	101	87	90	80	81	73	67	96	84	86	77	78	71	66	79	73	72	68	63	67	64	61	61	55	55	
	3	105	90	95	83	86	77	72	99	87	90	81	83	75	70	83	76	77	71	67	71	68	64	64	59	59	
	4	110	93	101	88	94	83	78	104	90	96	85	90	81	76	88	80	83	77	73	76	73	70	70	64	64	
5	113	95	106	91	99	86	82	107	92	101	88	95	84	80	91	83	87	80	77	80	76	73	73	67	67		
7	117	98	111	94	106	91	88	110	95	106	92	101	89	86	96	87	92	84	82	84	80	78	78	72	72		
10	120	100	115	97	111	95	92	113	97	110	95	106	92	90	99	90	97	88	86	88	83	82	82	75	75		

## 配光曲線

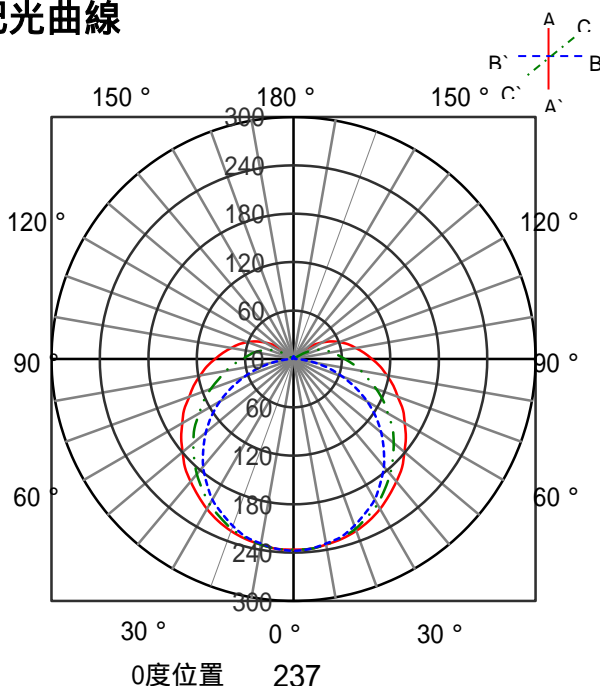

## 直射水平面照度

