


ECOHiLUX照明器具 配光データシート

意匠図


器具品名	ベースダウンライト	保守率	
器具品番	DL4L28-10W4BW-DA	良	0.69
部品品名	-	中	0.67
部品品番	-	否	0.63
		器具効率	
器具光束	349lm	上方向	0%
光源	-	下方向	100%
光源光束	一体型器具のため、器具光束表示	全方向	100%

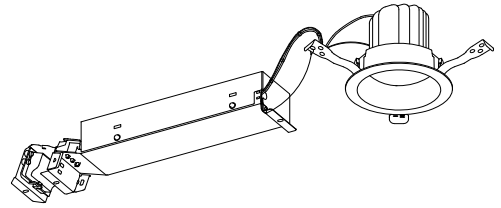

照明率表

作業面照明率(×0.01)																																																	
反射率	天井	80								70								50								30								0															
	壁	70				50				30				10				70				50				30				10				50				30				10				0			
	床	30	10	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	30	10	10				
室 指 数	0.4	58	55	46	45	40	39	35	57	54	46	45	40	39	35	45	44	39	39	35	39	38	35	34																									
	0.6	77	71	65	61	57	56	51	75	70	64	61	57	55	51	62	60	56	55	51	55	54	51	50																									
	0.8	88	80	76	71	68	66	61	86	79	75	71	68	65	61	73	70	67	65	61	66	64	61	59																									
	1	95	86	84	78	76	73	68	93	84	83	77	76	72	68	80	76	74	71	68	73	71	68	66																									
	1.25	102	91	92	84	84	79	75	99	89	90	83	83	79	75	87	82	81	78	74	79	77	74	72																									
	1.5	107	94	97	88	90	83	80	104	93	95	87	88	83	79	91	86	86	82	79	84	81	78	76																									
	2	113	98	104	93	98	89	86	109	97	102	92	96	89	86	97	91	93	87	85	90	86	84	82																									
	2.5	116	101	109	97	103	93	90	113	99	106	96	101	92	90	101	94	97	91	89	94	90	88	86																									
	3	119	102	113	99	107	96	93	115	101	110	98	105	95	93	104	96	100	94	91	96	92	90	88																									
	4	123	104	117	102	113	99	97	118	103	114	101	110	98	96	108	99	105	97	95	100	95	94	91																									
5	125	106	120	103	117	102	100	120	104	117	102	113	101	99	110	100	108	99	98	102	97	96	94																										
7	127	107	124	105	121	104	103	123	106	120	104	118	103	102	113	102	111	101	100	105	100	99	96																										
10	129	108	127	107	125	106	105	124	107	123	106	121	105	104	115	104	114	103	102	107	101	101	98																										

配光曲線

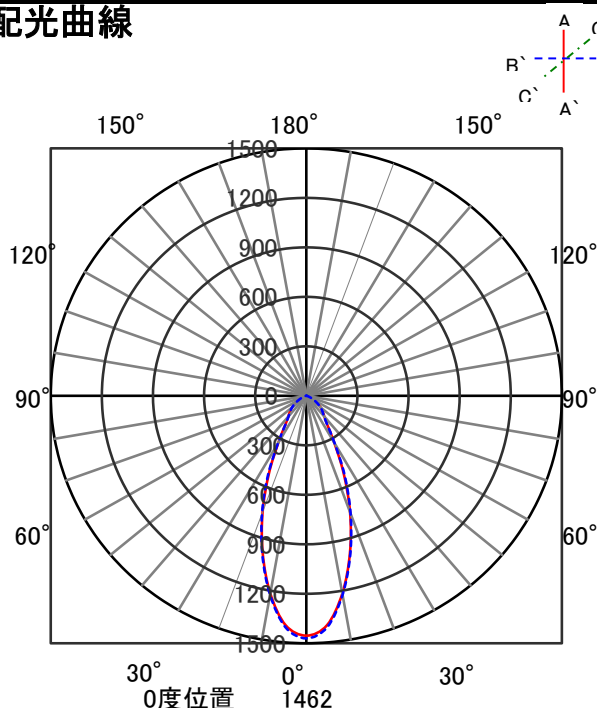

直射水平面照度

