


ECOHiLUX照明器具 配光データシート

意匠図


器具品名	ベースダウンライト	保守率	
器具品番	DL14L38-10A4BW-DA	良	0.69
部品品名	-	中	0.67
部品品番	-	否	0.63
		器具効率	
器具光束	1184lm	上方向	0%
光源	-	下方向	100%
光源光束	一体型器具のため、器具光束表示	全方向	100%

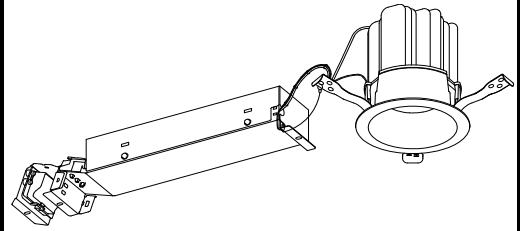

照明率表

		作業面照明率(×0.01)																																							
反射率	天井	80								70								50								30								0							
	壁	70		50		30		10		70		50		30		10		50		30		10		30		10		0													
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	10	30	10	10	30	10	0										
室 指 数	0.4	61	57	49	48	43	42	38	60	56	49	47	43	42	38	48	47	42	42	38	42	41	38	37																	
	0.6	80	73	68	65	61	59	55	78	72	67	64	61	59	55	66	63	60	58	55	59	58	55	53																	
	0.8	91	82	79	75	72	69	65	89	81	78	74	72	69	65	76	73	70	68	65	69	68	65	63																	
	1	98	88	87	81	80	76	72	96	87	86	80	79	76	72	83	79	78	75	72	76	74	71	70																	
	1.25	104	93	95	87	88	82	79	102	92	93	86	86	82	78	90	85	84	81	78	82	80	77	76																	
	1.5	109	96	100	90	93	86	83	106	95	98	90	91	86	82	94	88	89	85	82	87	84	81	79																	
	2	114	100	106	95	100	92	89	111	98	104	94	98	91	88	100	93	95	90	87	92	89	87	85																	
	2.5	118	102	111	98	106	95	92	114	101	108	97	103	94	92	103	96	99	93	91	96	92	90	88																	
	3	120	103	114	100	109	98	95	117	102	111	99	107	97	95	106	98	102	95	94	98	94	92	90																	
	4	124	105	119	103	115	101	99	120	104	115	102	112	100	98	109	100	106	98	97	102	97	96	93																	
5	126	106	122	105	118	103	101	122	105	118	104	115	102	101	111	102	109	100	99	104	99	98	95																		
7	128	108	125	106	123	105	104	124	107	121	105	119	104	103	114	103	111	102	102	106	101	100	97																		
10	130	109	128	108	126	107	106	125	108	124	107	122	106	105	116	105	115	104	104	108	102	102	99																		

配光曲線

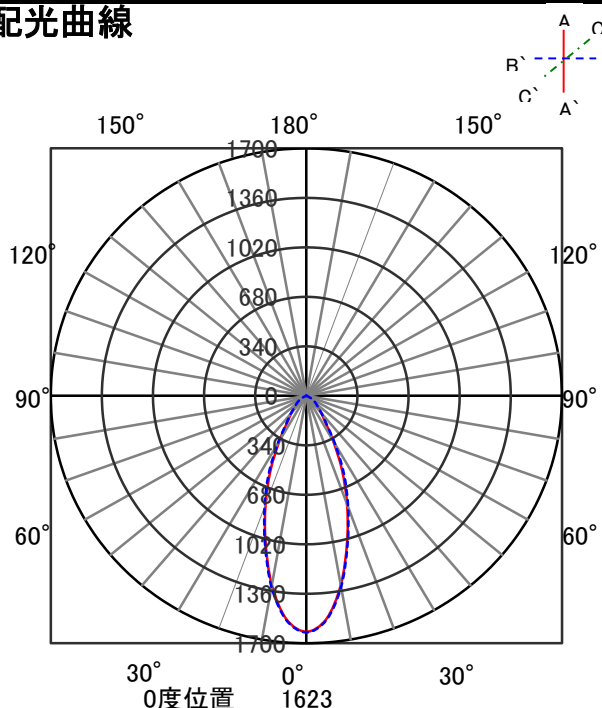

直射水平面照度

