


# ECOHiLUX照明器具 配光データシート

意匠図


器具品名	ベースダウンライト	保守率	
器具品番	DL18L28-10A6BW-DA	良	0.69
部品品名	-	中	0.67
部品品番	-	否	0.63
		器具効率	
器具光束	1474lm	上方向	0%
光源	-	下方向	100%
光源光束	一体型器具のため、器具光束表示	全方向	100%

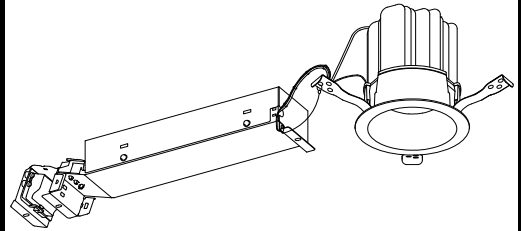

## 照明率表

		作業面照明率(×0.01)																											
反射率	天井	80								70								50				30				0			
	壁	70		50		30		10		70		50		30		10		50		30		10		30		10		0	
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10
室 指 数	0.4	63	59	51	50	45	44	41	62	58	51	49	45	44	41	50	49	45	44	41	44	44	41	39					
	0.6	81	75	70	67	63	62	58	80	74	69	66	63	61	58	68	65	62	61	58	62	61	57	56					
	0.8	92	84	81	76	74	71	68	90	83	80	76	74	71	68	78	75	73	71	67	72	70	67	66					
	1	99	89	89	82	82	78	74	97	88	88	82	81	77	74	85	81	80	77	74	78	76	73	72					
	1.25	105	94	96	88	89	84	80	103	92	94	87	88	83	80	91	86	86	82	80	84	82	79	78					
	1.5	109	96	101	91	94	87	84	106	95	99	91	93	87	84	95	89	90	86	83	88	85	83	81					
	2	115	100	107	96	101	92	90	111	99	105	95	99	92	89	100	93	96	91	88	93	90	88	86					
	2.5	118	102	112	99	106	96	93	115	101	109	98	104	95	93	104	96	100	94	92	96	92	91	89					
	3	120	103	115	100	110	98	96	117	102	112	100	107	97	95	106	98	103	96	94	99	94	93	91					
	4	123	105	119	103	115	101	99	120	104	116	102	112	100	99	109	100	107	99	97	102	97	96	94					
5	125	106	122	104	118	103	102	121	105	118	103	115	102	101	111	102	109	100	99	104	99	98	95						
7	128	107	125	106	122	105	104	123	106	121	105	119	104	103	114	103	112	102	102	106	101	100	98						
10	129	108	128	108	126	107	106	125	107	123	107	122	106	105	116	104	114	104	103	108	102	102	99						

## 配光曲線

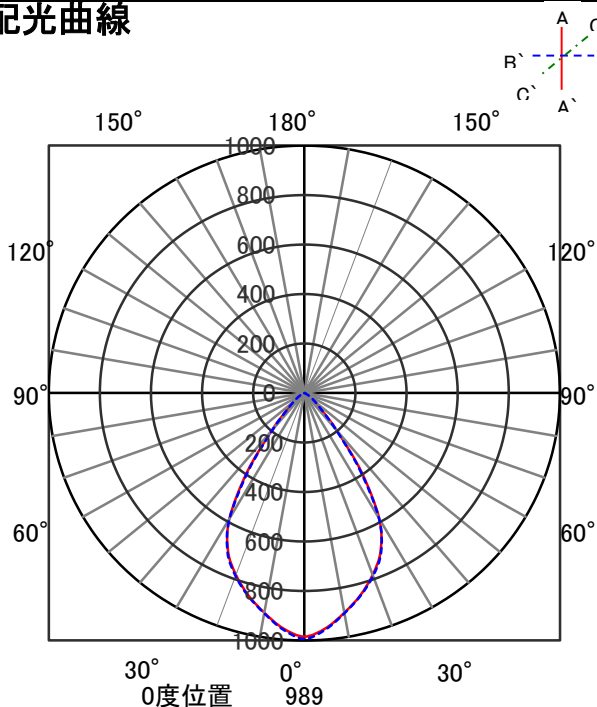

## 直射水平面照度

