


ECOHiLUX照明器具 配光データシート

意匠図


器具品名	ベースダウンライト	保守率	
		良	0.69
		中	0.67
		否	0.63
器具品番	DL11L38-15A7BW-DA	器具効率	
部品品名	-	上方向	0%
部品品番	-		
器具光束	951lm	下方向	100%
光源	-	全方向	100%
光源光束	一体型器具のため、器具光束表示		

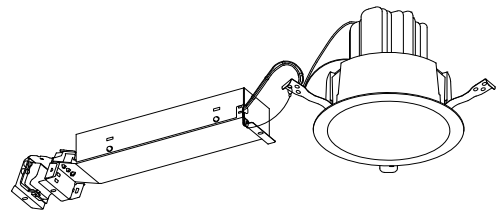

照明率表

作業面照明率(×0.01)																												
反 射 率	天井	80								70								50						30			0	
	壁	70			50			30		10	70			50			30		10	50		30		10	30		10	0
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	10	30	10	10	0	
室 指 数	0.4	64	60	53	51	47	46	43	63	60	53	51	47	46	43	52	51	47	46	43	46	46	43	42				
	0.6	87	80	77	73	71	68	65	85	79	76	73	70	68	65	75	72	69	68	65	69	67	65	64				
	0.8	93	85	83	78	76	73	70	91	84	82	77	76	73	70	80	76	75	72	69	73	72	69	68				
	1	101	91	91	85	85	80	77	99	90	90	84	84	80	77	88	83	82	79	77	81	79	76	75				
	1.25	108	96	100	91	94	88	85	106	95	98	91	92	87	85	95	90	90	87	84	88	86	84	82				
	1.5	111	97	102	93	96	89	87	108	96	101	92	95	89	86	97	91	92	88	86	90	87	85	83				
	2	115	101	108	97	103	94	91	112	99	106	96	101	93	91	102	95	98	92	90	95	91	89	87				
	2.5	119	103	113	100	108	98	96	116	102	111	99	106	97	95	106	98	102	96	94	99	95	93	91				
	3	121	104	116	102	111	99	97	118	103	113	101	109	99	97	107	99	104	97	96	100	96	95	93				
	4	124	105	120	104	116	102	100	120	104	116	103	113	101	100	110	101	108	99	98	103	98	97	95				
	5	126	106	122	105	119	104	102	122	105	119	104	116	103	102	112	102	110	101	100	105	99	99	96				
7	128	107	125	106	123	106	105	123	106	121	105	119	105	104	114	103	113	103	102	107	101	100	98					
10	129	108	127	108	126	107	106	125	107	123	106	122	106	105	116	104	114	104	104	108	102	102	99					

配光曲線

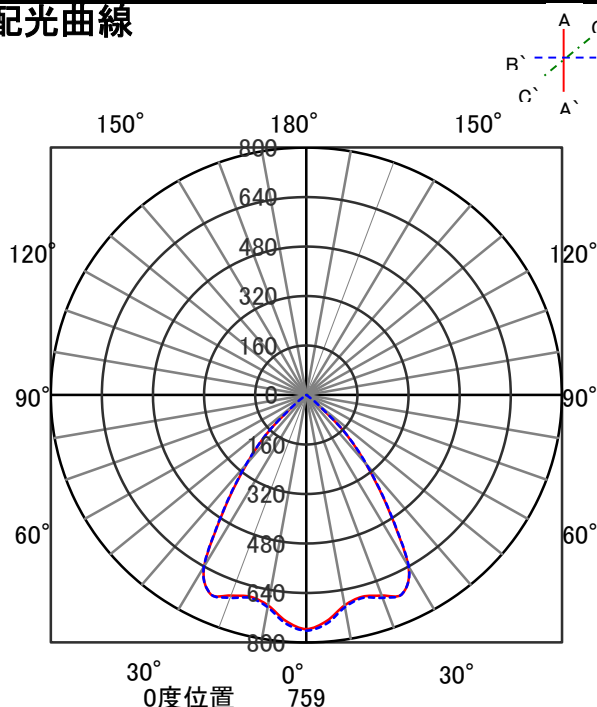

直射水平面照度

