


ECOHiLUX照明器具 配光データシート

意匠図


器具品名	ベースダウンライト	保守率	
器具品番	DL24L28-15W7BW-DA	良	0.69
部品品名	-	中	0.67
部品品番	-	否	0.63
器具光束	2136lm	器具効率	
光源	-	上方向	0%
光源光束	一体型器具のため、器具光束表示	下方向	100%
		全方向	100%

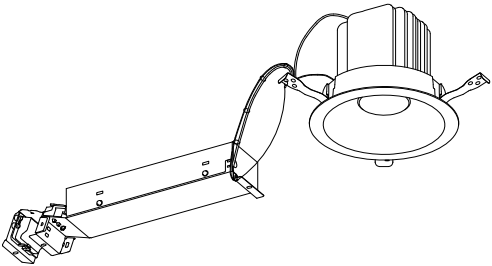

照明率表

作業面照明率(×0.01)																							
反射率	天井	80								70								50					
		70		50		30		10		70		50		30		10		50		30		10	
	壁	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10
	床	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10
室 指 数	0.4	60	56	48	46	42	41	37	59	55	48	46	41	41	37	47	45	41	40	37	41	40	37
	0.6	80	74	69	66	62	60	56	79	73	68	65	62	60	56	67	64	61	59	56	60	59	56
	0.8	87	79	75	71	68	65	61	85	78	74	70	67	65	61	72	69	66	64	60	65	63	60
	1	95	85	83	77	76	72	68	92	84	82	77	75	71	67	79	75	73	71	67	72	70	67
	1.25	102	91	92	84	84	79	75	99	89	90	83	83	79	75	87	82	81	78	74	79	77	74
	1.5	105	93	95	86	88	81	77	102	91	93	85	86	81	77	89	84	84	80	76	81	79	76
	2	111	96	102	91	95	87	83	107	95	99	90	93	86	82	95	88	90	85	82	87	83	81
	2.5	115	99	107	95	101	91	88	111	98	104	94	99	90	87	99	92	95	89	86	91	87	85
	3	117	101	110	97	105	93	90	113	99	107	96	102	92	90	102	94	98	91	88	93	89	87
	4	121	103	115	100	110	97	94	117	101	112	98	107	96	93	105	96	102	94	92	97	92	91
	5	123	104	118	102	114	99	97	119	103	115	100	111	98	96	108	98	105	96	95	100	95	93
	7	126	106	122	104	119	102	100	121	104	118	103	115	101	100	111	100	108	99	98	103	97	96
	10	128	107	125	106	123	104	103	123	106	121	104	119	103	102	113	102	111	101	100	105	99	98

配光曲線

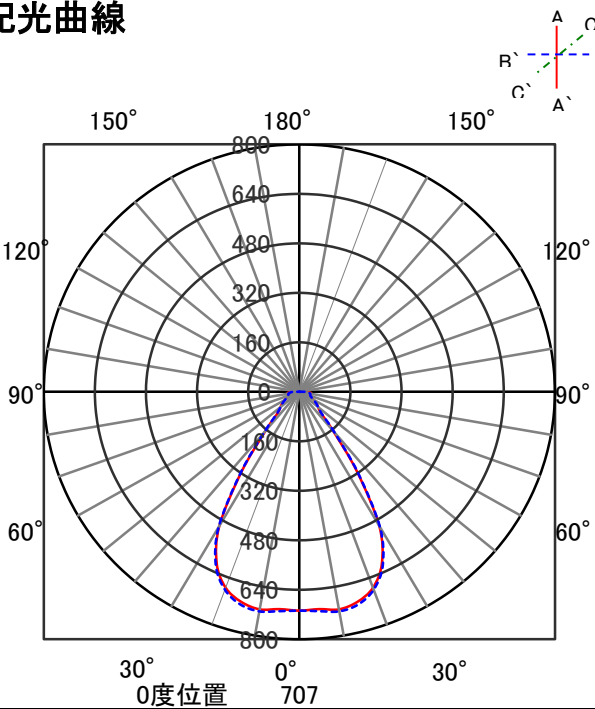

直射水平面照度

