


ECOHiLUX照明器具 配光データシート

意匠図

器具品名	冷ケース照明 T6	保守率	
器具品番	LD32FLT6・N/17/RC	良	0.69
部品品名	-	中	0.67
部品品番	-	否	0.63
器具光束	1700lm	器具効率	
光源	LED	上方向	10%
光源光束	1700lm	下方向	90%
		全方向	100%

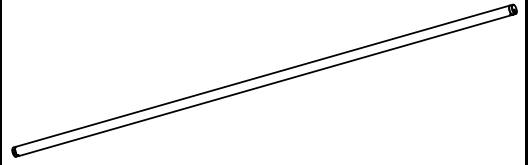


照明率表

作業面照明率(×0.01)

反射率	天井	80								70								50								30								0							
		壁	70		50		30		10		70	50		30		10		50	30		10		30	10		0															
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	10	30	10	10	30	10	0												
室 指 数	0.4	42	40	29	28	21	21	16	40	38	28	27	21	20	16	26	25	20	19	15	19	18	15	13																	
	0.6	57	53	42	40	33	32	27	55	51	41	39	33	32	26	39	37	31	30	26	30	29	25	22																	
	0.8	67	61	52	49	42	40	34	64	59	50	47	41	39	33	47	45	39	37	32	37	36	31	28																	
	1	75	68	60	56	50	47	41	72	65	58	54	48	46	40	54	51	46	44	39	43	42	38	34																	
	1.25	83	74	69	63	58	55	48	79	71	66	61	57	54	48	62	58	54	51	46	51	49	44	40																	
	1.5	89	78	75	68	64	60	53	84	75	72	66	62	58	52	66	62	59	56	51	55	53	49	44																	
	2	96	84	84	75	74	68	62	91	81	80	73	72	66	61	74	69	67	63	58	63	60	56	51																	
	2.5	102	88	91	80	82	74	68	97	85	87	78	79	72	67	80	74	73	69	64	68	66	62	57																	
	3	105	90	95	84	87	78	72	100	88	91	81	84	76	71	84	77	78	72	68	72	69	65	60																	
	4	110	94	102	88	95	83	79	105	91	97	86	91	81	77	89	81	84	77	74	78	74	71	65																	
5	113	96	106	91	100	87	83	108	93	101	89	96	85	81	93	84	88	81	78	81	77	75	69																		
7	117	99	112	95	106	91	88	111	96	106	93	102	89	86	97	88	93	85	83	86	81	79	73																		
10	120	101	116	98	112	95	93	114	98	110	95	107	93	91	100	91	98	89	87	90	85	83	77																		

配光曲線

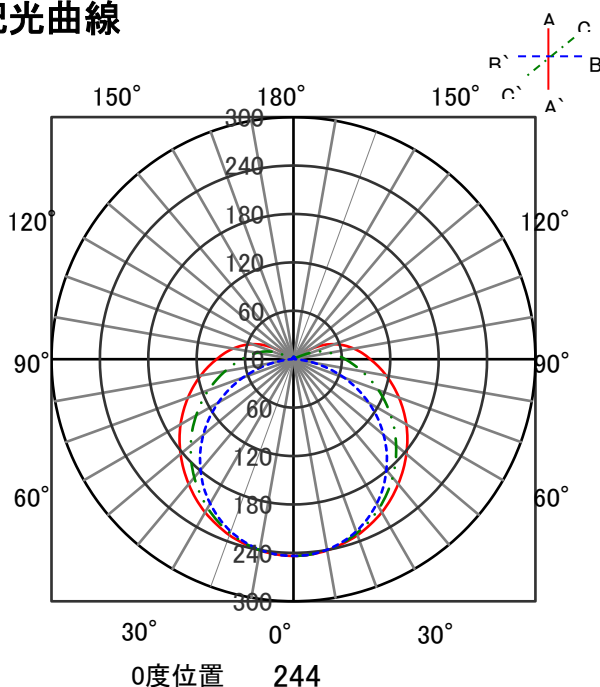

直射水平面照度

