


ECOHiLUX照明器具 配光データシート

意匠図

器具品名	冷ケース照明 T6	保守率	
器具品番	LD40T6・W/12/RC/HCR	良	0.69
部品品名	-	中	0.67
部品品番	-	否	0.63
器具光束	1250lm	器具効率	
光源	LED	上方向	10%
光源光束	1250lm	下方向	90%
		全方向	100%

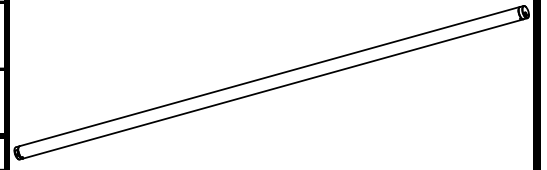


照明率表

作業面照明率(×0.01)

反射率	天井	80								70								50								30								0							
		壁	70		50		30		10		70	50		30		10		50	30		10		30	10		0															
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	10	30	10	10	30	10	0												
室 指 数	0.4	42	40	29	28	21	21	16	41	38	28	27	21	20	16	26	26	20	20	16	19	19	15	13	19	19	15	13													
	0.6	58	53	43	41	34	33	27	55	51	42	40	33	32	27	39	38	32	31	26	30	30	25	23	30	30	25	23													
	0.8	68	61	52	49	42	41	34	64	59	50	48	41	40	34	47	45	39	38	33	37	36	32	28	37	36	32	28													
	1	76	68	61	56	50	48	41	72	66	58	55	49	47	41	55	52	46	45	39	44	43	38	35	44	43	38	35													
	1.25	84	74	69	64	59	55	49	80	72	67	62	57	54	48	62	59	54	52	47	51	50	45	41	51	50	45	41													
	1.5	89	78	75	68	65	60	54	85	76	72	66	63	59	53	67	63	59	56	51	56	54	49	45	56	54	49	45													
	2	97	84	84	75	75	68	62	92	81	81	73	72	67	61	75	69	68	64	59	63	61	57	52	63	61	57	52													
	2.5	102	88	91	80	82	74	69	97	85	87	78	79	72	67	80	74	74	69	65	69	66	62	57	69	66	62	57													
	3	106	91	96	84	87	78	73	100	88	92	82	84	76	71	84	77	78	73	69	73	70	66	61	73	70	66	61													
	4	110	94	102	88	95	83	79	105	91	98	86	91	82	77	89	82	84	78	74	78	74	71	66	78	74	71	66													
5	114	96	106	91	100	87	83	108	93	102	89	96	85	82	93	85	89	81	78	82	78	75	70	82	78	75	70														
7	117	99	112	95	107	92	89	111	96	107	93	102	90	87	97	88	94	86	83	86	82	80	74	86	82	80	74														
10	120	101	116	98	112	95	93	114	98	111	96	107	93	91	101	91	98	89	87	90	85	83	78	90	85	83	78														

配光曲線

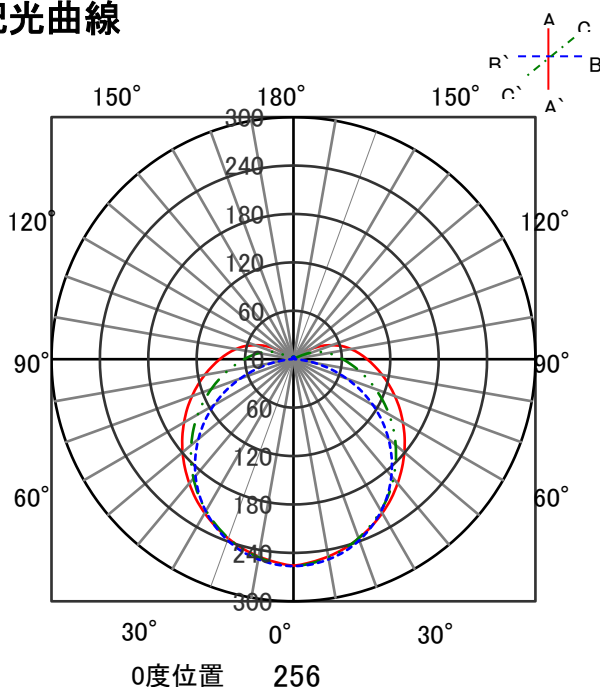

直射水平面照度

