


ECOHiLUX照明器具 配光データシート

意匠図

器具品名	冷ケース照明 T6	保守率	
器具品番	LD20T6・L30/5/RC/HCR	良	0.69
部品品名	-	中	0.67
部品品番	-	否	0.63
器具光束	540lm	器具効率	
光源	LED	上方向	10%
光源光束	540lm	下方向	90%
		全方向	100%

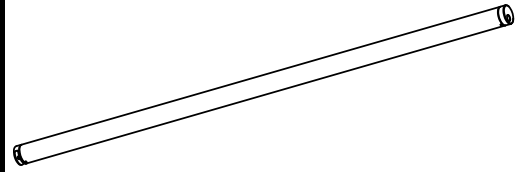


照明率表

作業面照明率(×0.01)

反射率	天井	80								70								50								30								0							
		壁	70		50		30		10		70	50		30		10		50	30		10		30	10		0															
	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	10	30	10	0															
室 指 数	0.4	42	39	28	27	21	20	16	40	38	28	27	20	20	16	26	25	19	19	15	18	18	14	12																	
	0.6	57	53	42	40	33	32	27	55	51	41	39	32	31	26	38	37	31	30	25	29	29	24	22																	
	0.8	67	61	51	48	41	40	34	64	58	50	47	40	39	33	46	44	38	37	32	36	35	31	27																	
	1	75	67	60	55	49	47	40	71	65	58	54	48	46	40	54	51	45	44	38	43	42	37	33																	
	1.25	83	74	68	63	58	54	48	79	71	66	61	56	53	47	61	58	53	51	45	50	49	44	40																	
	1.5	88	78	74	67	64	59	53	84	75	71	65	62	58	52	66	62	58	55	50	55	53	48	44																	
	2	96	84	84	75	74	67	61	91	81	80	73	71	66	60	74	68	66	63	58	62	60	56	51																	
	2.5	101	88	90	80	81	73	68	96	85	86	78	78	71	66	79	73	73	68	64	68	65	61	56																	
	3	105	90	95	83	86	77	72	100	87	91	81	83	75	70	83	77	77	72	68	72	68	65	60																	
	4	110	94	101	88	94	83	78	104	91	97	85	90	81	77	88	81	83	77	73	77	73	70	65																	
5	113	96	106	91	99	87	82	107	93	101	89	95	84	81	92	84	88	80	77	81	77	74	68																		
7	117	98	111	95	106	91	88	111	96	106	92	101	89	86	96	87	93	85	82	85	81	79	73																		
10	120	100	116	98	112	95	92	114	98	110	95	107	93	90	100	90	97	88	86	89	84	82	76																		

配光曲線

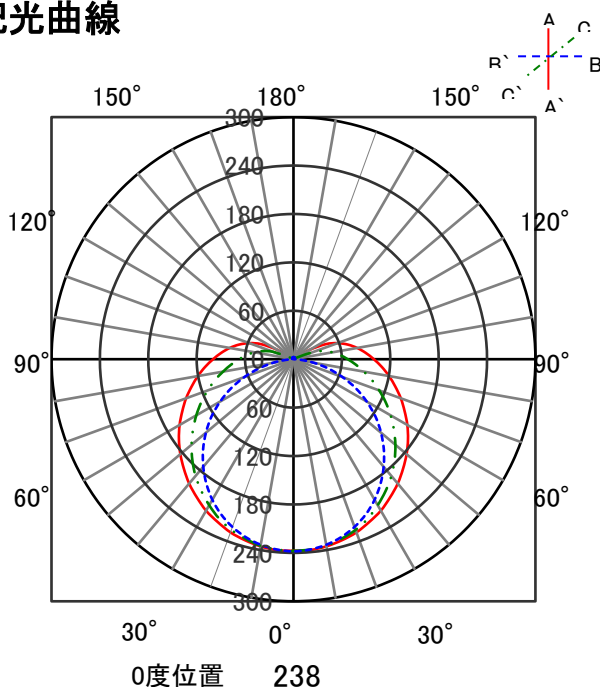

直射水平面照度

