


ECOHiLUX照明器具 配光データシート

器具品名	ユニバーサルダウンライト FOODEE高照度タイプ	保守率	
器具品番	UV30L9-15M-D	良	0.69
部品品名	-	中	0.67
部品品番	-	否	0.63
器具光束	2900lm	器具効率	
光源	-	上方向	0%
光源光束	一体型器具のため、器具光束表示	下方向	100%
		全方向	100%

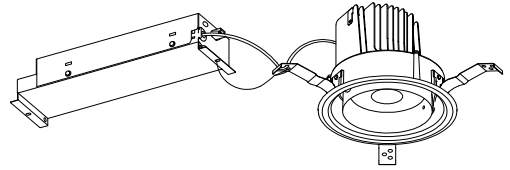


照明率表

作業面照明率(×0.01)

(反射率%)	天井	80								70								50						30				0
		壁	70		50		30		10	70		50		30		10	50		30		10	30		10	0			
			床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	10	0		
室指数	0.4	63	59	52	50	45	44	41	62	59	51	50	45	44	41	50	49	45	44	41	44	44	41	39				
	0.6	82	76	71	67	64	62	58	81	75	70	67	63	61	58	68	66	62	61	58	62	61	57	56				
	0.8	93	84	82	77	74	71	68	91	83	81	76	74	71	67	79	75	73	71	67	72	70	67	65				
	1	100	90	89	83	82	78	74	98	89	88	82	81	77	74	85	81	80	77	74	78	76	73	72				
	1.25	106	94	96	88	89	84	80	104	93	95	88	88	83	80	92	86	86	83	80	84	82	79	77				
	1.5	110	97	101	92	94	88	84	107	96	99	91	93	87	84	96	90	90	86	83	88	85	83	81				
	2	116	101	108	97	102	93	90	113	100	106	96	100	92	89	101	94	97	91	89	93	90	88	86				
	2.5	120	103	113	100	107	96	94	116	102	110	99	105	96	93	105	97	101	94	92	97	93	91	89				
	3	122	105	116	102	111	99	97	118	104	113	101	108	98	96	107	99	104	97	95	100	95	94	91				
	4	125	107	121	104	116	102	100	121	106	117	103	113	101	100	111	101	108	100	98	103	98	97	95				
	5	128	108	124	106	120	104	103	123	107	120	105	117	104	102	113	103	111	102	101	105	100	99	97				
	7	130	109	127	108	124	107	106	126	108	123	107	121	106	105	116	105	114	104	103	108	102	102	99				
10	132	110	130	110	128	109	108	127	109	126	109	124	108	107	118	106	117	106	105	110	104	104	101					

配光曲線

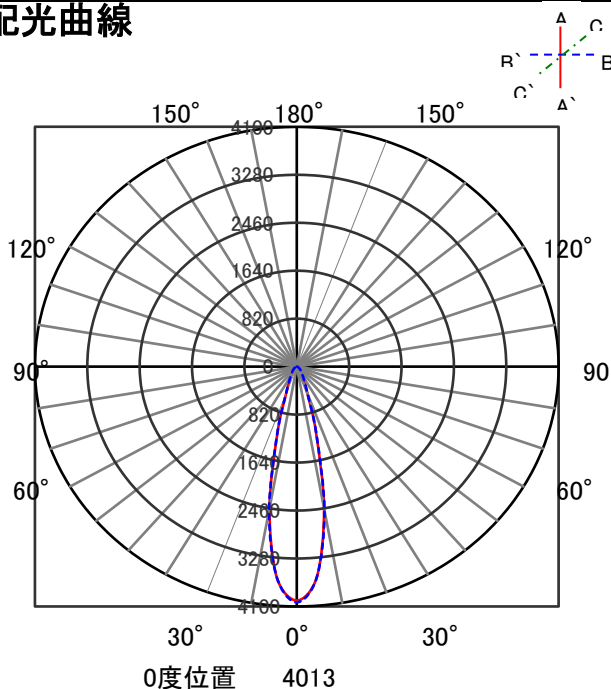

直射水平面照度

