


ECOHiLUX照明器具 配光データシート

器具品名	ベースダウンライト	保守率	
器具品番	UV35L9-15W-D	良	0.69
部品品名	-	中	0.67
部品品番	-	否	0.63
器具光束	3450lm	器具効率	
光源	-	上方向	0%
光源光束	一体型器具のため、器具光束表示	下方向	100%
		全方向	100%

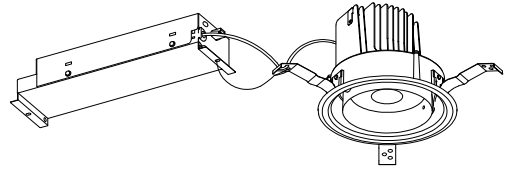


照明率表

作業面照明率(×0.01)

(反射率)	天井	80								70								50						30				0
		壁	70		50		30		10	70		50		30		10	50		30		10	30		10	0			
			床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	10	0		
室指数	0.4	62	59	51	49	45	44	41	61	58	51	49	45	44	41	50	49	44	44	40	44	43	40	39				
	0.6	81	75	70	66	63	61	57	80	74	69	66	63	61	57	68	65	62	60	57	61	60	57	56				
	0.8	92	83	81	76	74	71	67	90	82	80	75	73	70	67	78	74	72	70	67	71	69	66	65				
	1	98	88	88	82	81	77	73	96	87	87	81	80	77	73	84	80	79	76	73	77	75	72	71				
	1.25	105	93	95	87	88	83	79	102	92	93	86	87	82	79	90	85	85	81	79	83	81	78	76				
	1.5	109	96	100	90	93	86	83	106	94	98	90	92	86	83	94	88	89	85	82	87	84	82	80				
	2	114	99	106	95	100	91	89	111	98	104	94	98	91	88	99	92	95	90	87	92	89	86	85				
	2.5	117	101	111	98	105	95	92	114	100	108	97	103	94	92	103	95	99	93	91	95	92	90	88				
	3	120	103	114	100	109	97	95	116	102	111	99	107	97	94	105	97	102	95	93	98	94	92	90				
	4	123	105	118	103	114	100	99	119	104	115	102	111	100	98	109	100	106	98	97	101	97	95	93				
	5	125	106	121	104	118	103	101	121	105	118	103	115	102	100	111	101	109	100	99	103	98	97	95				
	7	128	107	125	106	122	105	104	123	106	121	105	119	104	103	114	103	112	102	101	106	100	100	97				
10	129	108	127	108	126	107	106	125	107	123	106	122	106	105	115	104	114	104	103	108	102	102	99					

配光曲線

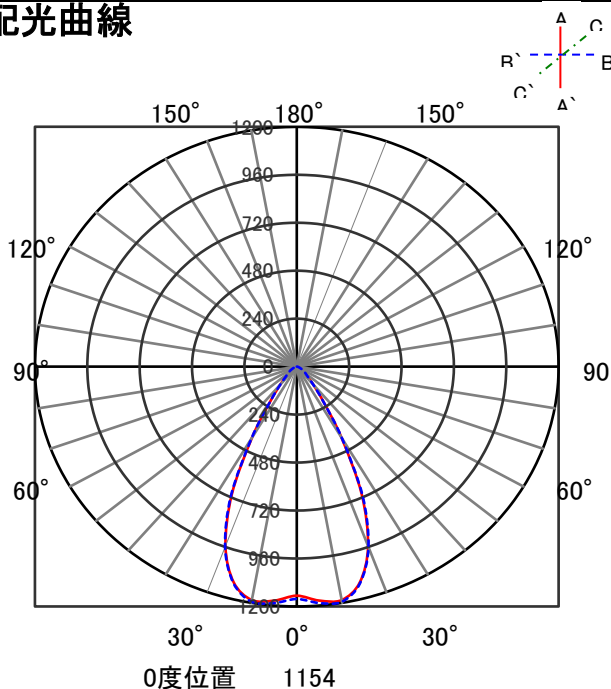

直射水平面照度

