


ECOHiLUX照明器具 配光データシート

意匠図

品名	ラインルクスエッジ ダクトレール型			保守率	
セット品番	-			良	0.83
光源品番	EGDR-28W-12-LI			中	0.81
器具品番	-			否	0.77
				器具効率	
器具光束	2850lm	最大取付間隔		上方向	22%
光源	LED	A-A	1.55 H	下方向	78%
光源光束	-	B-B	1.27 H	全方向	100%

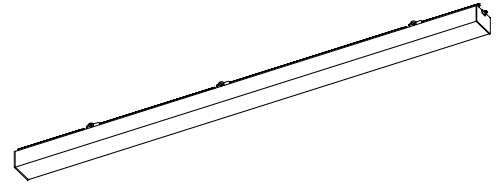


照明率表

作業面照明率(×0.01)

反 射 率	天井	80								70								50				30				0				
		壁	70	50	30	10	70	50	30	10	70	50	30	10	50	30	10	30	10	10	30	10	0	0						
室	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	10	30	10	10	30	10	0	0
指 数	0.4	41	38	28	27	20	20	15	39	36	26	25	19	19	15	24	23	18	18	14	16	16	13	10	10	10	10	10	10	10
	0.6	55	51	41	39	32	31	25	52	48	39	37	31	30	25	35	34	28	28	23	26	26	21	18	18	18	18	18	18	18
	0.8	65	59	50	47	40	38	32	61	56	47	45	38	37	31	43	41	35	34	29	32	32	27	23	23	23	23	23	23	23
	1	73	65	58	54	48	45	39	68	62	55	51	46	44	38	50	47	42	41	35	38	37	33	28	28	28	28	28	28	28
	1.25	81	72	66	61	56	53	46	76	68	63	58	54	51	45	57	53	49	47	42	45	44	39	34	34	34	34	34	34	34
	1.5	86	76	72	65	62	58	51	80	72	68	63	59	56	50	61	58	54	51	46	49	48	43	37	37	37	37	37	37	37
	2	93	81	81	73	72	65	59	88	78	77	70	68	63	58	69	64	62	58	54	56	54	50	43	43	43	43	43	43	43
	2.5	99	85	88	78	79	71	66	93	81	83	75	75	69	64	74	68	68	64	59	61	59	55	48	48	48	48	48	48	48
	3	102	88	93	81	84	75	70	96	84	87	78	80	72	68	78	72	72	67	63	65	62	59	51	51	51	51	51	51	51
	4	107	91	99	86	92	81	76	100	87	93	82	87	78	74	83	76	78	72	69	70	67	64	56	56	56	56	56	56	56
5	110	93	103	89	97	84	80	103	89	97	85	92	81	78	86	79	82	75	72	73	70	67	59	59	59	59	59	59	59	
7	114	96	109	92	104	89	86	107	92	102	89	98	86	83	90	82	87	79	77	77	73	71	63	63	63	63	63	63	63	
10	117	98	113	95	109	93	90	110	94	106	92	103	89	87	94	85	91	83	81	81	77	75	66	66	66	66	66	66	66	

配光曲線

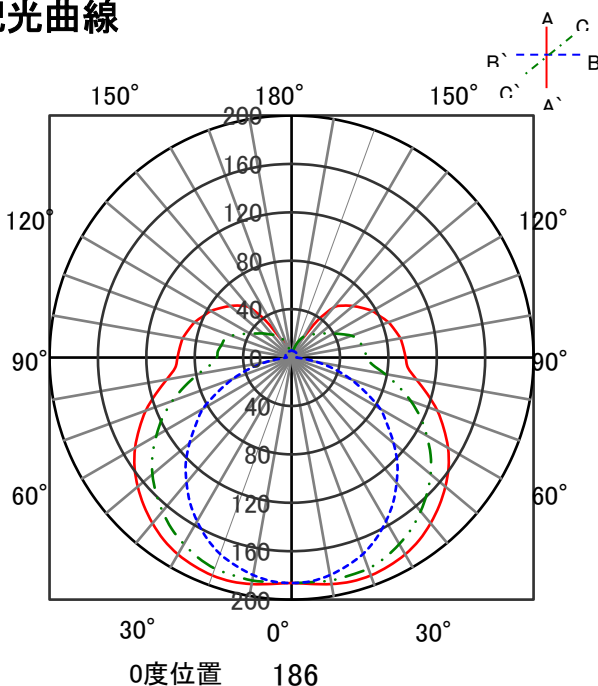

直射水平面照度

