


# ECOHiLUX照明器具 配光データシート

意匠図

品名	ラインルクスエッジ ダクトレール型			保守率	
セット品番	-			良	0.83
光源品番	EGDR-35W-09-LI			中	0.81
器具品番	-			否	0.77
				器具効率	
器具光束	3559.5lm	最大取付間隔		上方向	22%
光源	LED	A-A	1.55 H	下方向	78%
光源光束	-	B-B	1.27 H	全方向	100%

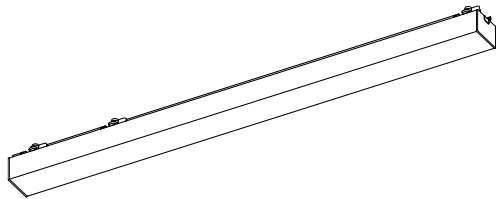


## 照明率表

作業面照明率(×0.01)

反 射 率	天井	80								70								50				30				0	
		壁	70	50	30	10	70	50	30	10	70	50	30	10	50	30	10	30	10	10	30	10	0	0			
室	床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	10	30	10	10	30	10	0	0
指 数	0.4	41	38	28	27	20	20	15	39	36	26	25	19	19	15	24	23	18	18	14	16	16	13	10	0	0	
	0.6	55	51	41	39	32	31	25	52	48	39	37	31	30	25	35	34	28	28	23	26	26	21	18	0	0	
	0.8	65	59	50	47	40	38	32	61	56	47	45	38	37	31	43	41	35	34	29	32	32	27	23	0	0	
	1	73	65	58	54	48	45	39	68	62	55	51	46	44	38	50	47	42	41	35	38	37	33	28	0	0	
	1.25	81	72	66	61	56	53	46	76	68	63	58	54	51	45	57	53	49	47	42	45	44	39	34	0	0	
	1.5	86	76	72	65	62	58	51	80	72	68	63	59	56	50	61	58	54	51	46	49	48	43	37	0	0	
	2	93	81	81	73	72	65	59	88	78	77	70	68	63	58	69	64	62	58	54	56	54	50	43	0	0	
	2.5	99	85	88	78	79	71	66	93	81	83	75	75	69	64	74	68	68	64	59	61	59	55	48	0	0	
	3	102	88	93	81	84	75	70	96	84	87	78	80	72	68	78	72	72	67	63	65	62	59	51	0	0	
	4	107	91	99	86	92	81	76	100	87	93	82	87	78	74	83	76	78	72	69	70	67	64	56	0	0	
5	110	93	103	89	97	84	80	103	89	97	85	92	81	78	86	79	82	75	72	73	70	67	59	0	0		
7	114	96	109	92	104	89	86	107	92	102	89	98	86	83	90	82	87	79	77	77	73	71	63	0	0		
10	117	98	113	95	109	93	90	110	94	106	92	103	89	87	94	85	91	83	81	81	77	75	66	0	0		

## 配光曲線

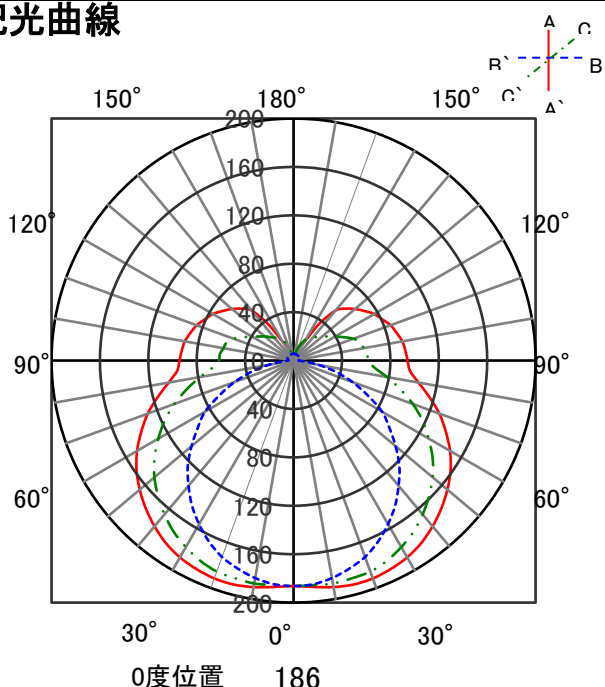

## 直射水平面照度

