


ECOHiLUX照明器具 配光データシート

意匠図


器具品名	直付型LEDベース照明	保守率	
器具品番	IRLDBL-63CL-WW-SQ53	良	-
部品品名	-	中	-
部品品番	-	否	-
		器具効率	
器具光束	6050lm	上方向	2%
光源	LED	下方向	98%
光源光束	一体型器具のため、器具光束表示	全方向	100%

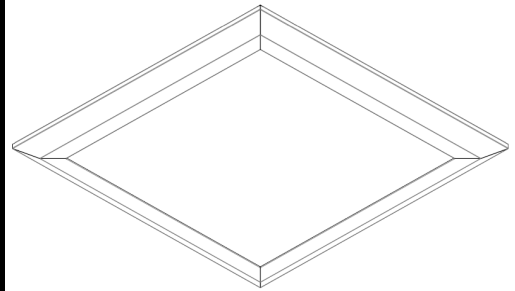

照明率表

		作業面照明率(×0.01)																						
反射率	天井	80								70				50				30		0				
	壁	70	50	30	10	70	50	30	10	70	50	30	10	50	30	10	30	10	30	10	0	0		
床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	30	10	10	0		
室 指 数	0.4	45	42	31	30	24	23	19	43	41	31	30	24	23	19	30	29	23	23	19	23	22	18	17
	0.6	62	57	47	45	39	37	32	60	55	46	44	38	37	32	45	43	37	36	32	36	36	31	29
	0.8	72	65	57	54	48	46	40	70	64	56	53	47	45	40	54	51	46	44	39	44	43	39	36
	1	81	72	66	62	57	54	48	78	71	65	61	56	53	48	62	59	54	52	47	52	51	46	44
	1.25	89	79	76	69	66	62	56	86	77	74	68	65	61	56	70	66	63	60	55	61	59	54	52
	1.5	94	83	82	74	72	67	61	91	81	79	73	71	66	61	75	71	68	65	60	66	63	59	56
	2	102	89	91	81	82	75	70	98	87	88	80	80	74	69	83	77	77	72	68	74	71	67	64
	2.5	107	93	98	86	90	81	76	103	91	95	85	87	80	76	89	82	83	78	74	79	76	73	70
	3	111	95	102	89	95	85	80	106	93	99	88	92	84	80	93	85	88	82	78	83	80	77	74
	4	115	98	108	94	102	90	86	111	96	105	92	99	89	85	98	90	93	86	84	88	84	82	79
5	118	100	112	96	107	93	90	114	98	108	95	104	92	89	101	92	97	90	87	92	87	85	82	
7	122	102	117	99	113	97	95	117	100	113	98	109	96	94	105	95	102	93	91	96	91	89	86	
10	124	104	121	102	118	100	98	119	102	116	100	114	99	97	108	98	106	96	95	99	94	93	89	

配光曲線

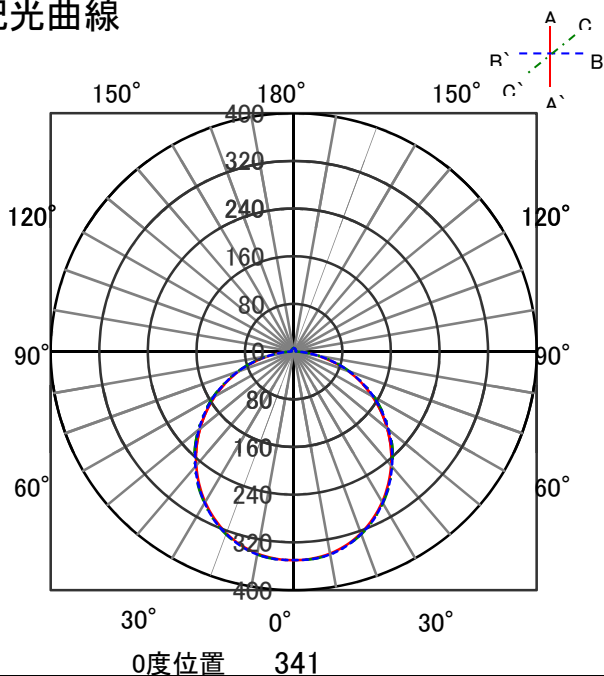

直射水平面照度

