


# ECOHiLUX照明器具 配光データシート

意匠図


器具品名	冷ケース用照明	保守率	
器具品番	LDG32T・L30/24/RC/HCR/C	良	0.69
部品品名	-	中	0.67
部品品番	-	否	0.63
器具光束	2430lm	器具効率	
光源	LED	上方向	5%
光源光束	2430lm	下方向	95%
		全方向	100%

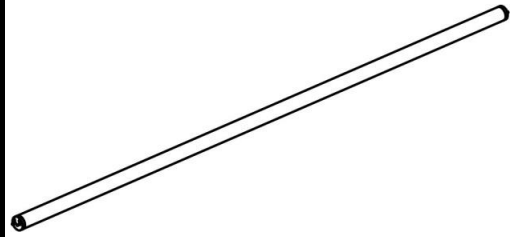

## 照明率表

作業面照明率(×0.01)																										
反射率	天井	80								70								50				30		0		
		壁	70		50		30		10		70	50		30		10		50	30		10		30	10		0
床	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	30	10	30	10	10	30	10	10	30	10
室指数	0.4	43	41	30	29	22	22	17	42	39	29	28	22	21	17	28	27	21	21	17	20	20	16	14		
	0.6	59	55	44	42	35	34	29	57	53	43	41	35	34	29	41	40	34	33	28	33	32	28	25		
	0.8	69	63	54	51	44	42	36	67	61	52	50	43	42	36	50	47	42	40	35	40	39	34	32		
	1	78	70	63	58	53	50	44	75	68	61	57	51	49	43	57	55	49	48	42	47	46	41	38		
	1.25	86	76	72	66	62	58	52	82	74	69	64	60	57	51	65	62	58	55	50	55	53	49	46		
	1.5	91	80	78	70	68	63	57	87	78	75	69	66	62	56	70	66	63	60	55	60	58	53	50		
	2	99	86	87	78	78	71	65	95	84	84	76	75	70	64	78	73	71	67	63	68	65	61	57		
	2.5	104	90	94	83	85	77	71	100	88	90	81	83	75	70	84	78	78	73	69	74	71	67	63		
	3	108	93	98	86	90	81	76	103	90	95	84	88	79	75	88	81	82	77	73	77	74	71	67		
	4	113	96	105	91	98	86	82	108	94	101	89	95	85	81	93	85	88	82	78	83	79	76	72		
5	116	98	109	94	103	90	86	111	96	105	92	99	88	85	97	88	93	85	82	87	82	80	75			
7	119	100	114	97	109	94	91	114	98	110	95	105	92	90	101	92	98	89	87	91	86	84	80			
10	122	102	118	100	115	98	95	117	100	113	98	110	96	94	104	94	102	93	91	95	89	88	83			

## 配光曲線

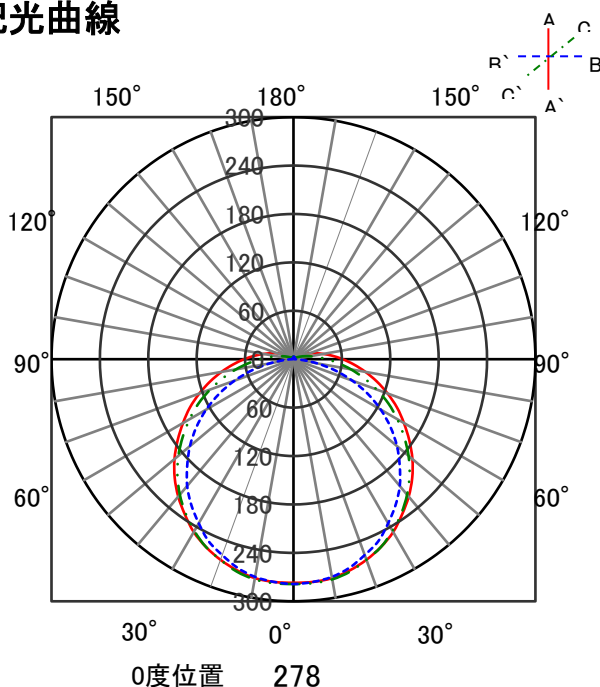

## 直射水平面照度

