


ECOHiLUX照明器具 配光データシート

意匠図

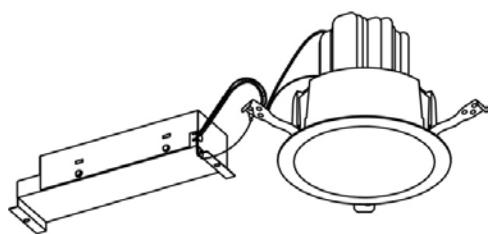


器具品名	ベースダウンライト	保守率	
		良	0.69
器具品番	DL14WW8-15A6BW-D DL14WW8-15A6BW-DLS	中	0.67
部品品名	-	否	0.63
部品品番	-	器具効率	
器具光束	1249lm	上方向	0%
光源	-	下方向	100%
光源光束	一体型器具のため、器具光束表示	全方向	100%

照明率表

反射率	天井	作業面照度率(×0.01)										作業面照度率(×0.01)										作業面照度率(×0.01)									
		80					70					50					30					30					10				
		壁	70	50	30	10	70	50	30	10	50	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0	
室 指 数	壁	30	10	30	10	30	10	10	30	10	30	10	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	30	10	0	
	0.4	64	60	53	51	47	46	42	63	59	52	51	46	46	42	52	50	46	45	42	46	45	42	41							
	0.6	83	76	72	68	65	63	60	81	75	71	68	65	63	60	70	67	64	63	60	63	62	59	58							
	0.8	93	85	83	78	76	73	70	92	84	82	77	76	73	69	80	76	74	72	69	73	72	69	68							
	1	100	90	90	84	83	79	76	98	89	89	83	83	79	76	86	82	81	78	75	80	78	75	73							
	1.25	106	94	97	89	91	85	82	104	93	95	88	89	85	82	92	87	87	84	81	85	83	81	79							
	1.5	110	97	102	92	95	88	85	107	96	100	91	94	88	85	96	90	91	87	85	89	86	84	82							
	2	115	100	108	96	102	93	91	112	99	105	96	100	93	90	101	94	97	91	89	94	90	89	87							
	2.5	119	102	112	99	107	96	94	115	101	109	98	105	96	94	104	97	101	94	93	97	93	92	90							
	3	121	104	115	101	110	99	96	117	102	112	100	108	98	96	107	98	103	96	95	99	95	94	92							
	4	124	105	119	103	115	102	100	120	104	116	102	113	101	99	110	101	107	99	98	102	98	97	94							
	5	126	106	122	105	119	103	102	122	105	118	104	116	103	101	112	102	110	101	100	104	99	98	96							
	7	128	108	125	107	123	106	105	124	106	121	106	119	105	104	114	104	113	103	102	107	101	101	98							
	10	130	108	128	108	126	107	107	125	107	124	107	122	106	106	116	105	115	104	104	108	102	102	99							

配光曲線

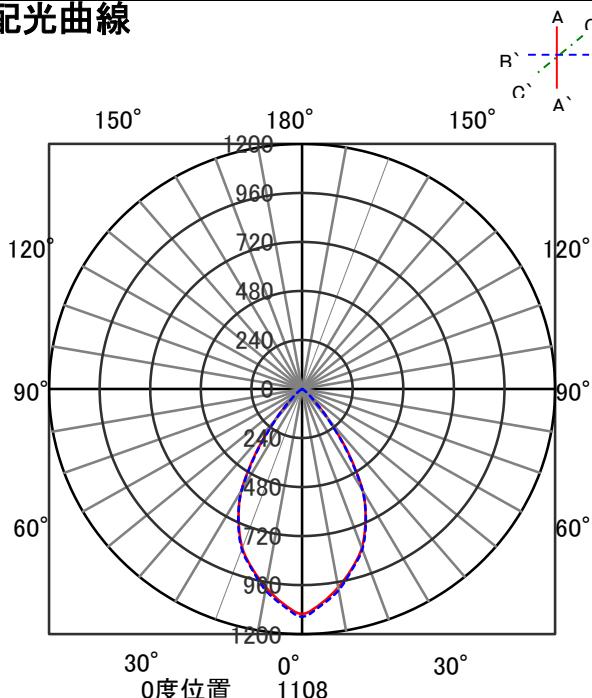

直射水平面照度

