


# ECOHiLUX照明器具 配光データシート


器具品名	ベースダウンライト	保守率	
器具品番	DL40N8-15W4BW-D DL40N8-15W4BW-DLS	良	0.69
部品品名	-	中	0.67
部品品番	-	否	0.63
		器具効率	
器具光束	3920lm	上方向	0%
光源	-	下方向	100%
光源光束	一体型器具のため、器具光束表示	全方向	100%

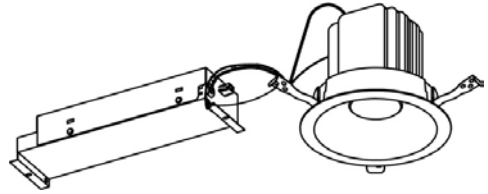

## 照明率表

		作業面照明率(×0.01)																						
反射率	天井	80								70				50				30		0				
	壁	70		50		30		10	70		50		30		10	50		30		10	0			
	床	30	10	30	10	30	10	10	30	10	30	10	10	30	10	30	10	10	30	10	10	0		
室 指 数	0.4	56	53	44	42	37	36	33	55	52	43	42	37	36	32	43	41	37	36	32	36	36	32	31
	0.6	74	68	62	58	54	52	48	72	67	61	58	54	52	48	59	57	53	52	48	52	51	48	46
	0.8	85	77	73	69	65	62	58	83	76	72	68	64	62	58	70	67	63	61	58	62	61	57	56
	1	93	83	81	75	73	69	65	91	82	80	75	72	69	65	77	73	71	68	65	69	68	64	62
	1.25	100	89	89	82	81	76	72	97	87	87	81	80	76	72	84	79	78	75	71	76	74	71	69
	1.5	105	92	95	86	87	81	77	102	91	93	85	86	80	77	89	83	83	79	76	81	78	75	73
	2	111	97	102	91	95	87	84	108	95	100	91	94	87	83	95	89	90	85	82	87	84	82	79
	2.5	115	99	107	95	101	91	88	111	98	105	94	99	91	88	100	92	95	89	87	92	88	86	84
	3	118	101	111	97	106	94	91	114	100	108	96	103	93	91	103	95	99	92	90	95	91	89	86
	4	122	103	116	101	111	98	96	117	102	113	100	109	97	95	107	98	103	96	94	99	94	92	90
5	124	105	119	102	115	100	98	120	104	116	101	112	100	98	109	99	106	98	96	101	96	95	92	
7	126	106	123	105	120	103	102	122	105	119	104	116	102	101	112	102	110	100	99	104	99	98	95	
10	128	107	126	106	124	105	104	124	106	122	105	120	104	103	114	103	113	102	102	106	100	100	97	

## 配光曲線

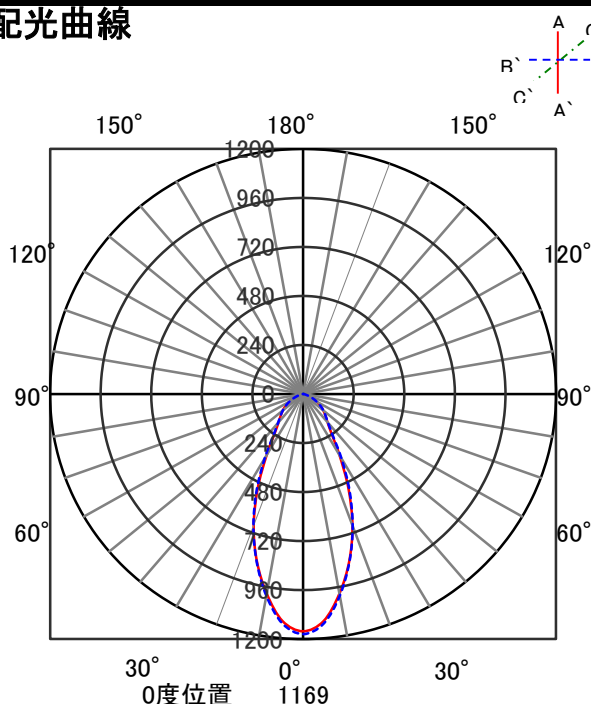

## 直射水平面照度

